
N 70, Gas hob, 75 cm, Stainless steel
T27DS79N0

COOKING PASSION SINCE 1877



The gas hob with a stainless-steel surface design and adjustable FlameSelect.

- √ FlameSelect® – Gain ultimate control of your flame.
- √ Pan Supports - continuous cast-iron pan supports for maximum stability and cooking convenience.
- √ Dual Wok Burner 5.0 kW – Use one gas flame for simmering, two for sizzling stir-fries.
- √ Sword Knobs - a better feel and easier to operate, the new knob in an attractive design.
- √ Stainless steel surface - elegant and sophisticated design.

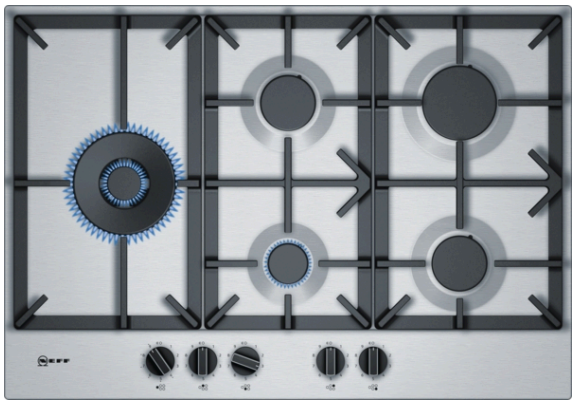

Features

Technical Data

Product name/family : gas hob w integrated controls
Construction type : Built-in
Energy input : Gas
Total number of positions that can be used at the same time : 5
Type of control setting devices : sword knobs
Required niche size for installation (HxWxD) : 45 x 560-562 x 480-492 mm
Width of the appliance : 750 mm
Dimensions : 53 x 750 x 520 mm
Dimensions of the packed product (HxWxD) : 145 x 793 x 597 mm
Net weight : 15.5 kg
Gross weight : 17.0 kg
Residual heat indicator : without
Location of control panel : Hob front
Basic surface material : Stainless steel
Color of surface : Stainless steel
Approval certificates : CE
Length of electrical supply cord : 100 cm
EAN code : 4242004203520
Electrical connection rating : 1 W
Gas connection rating : 12500 W
Fuse protection : 3 A
Voltage : 220-240 V
Frequency : 60; 50 Hz

4 242004 203520

N 70, Gas hob, 75 cm, Stainless steel

T27DS79N0

COOKING PASSION SINCE 1877

Features

Design

- Stainless steel surface
- black cast iron pan supports with protective rubber feet

Usage convenience

- FlameSelect with 9 steps: precisely control and adjust the flame in nine defined levels.
- Design co-ordinated control dials: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

Burners and power

- 5 burner hob
- Including 1 wok burner: use an extra wide power range, separately controlling two flame rings.
- Left: Wok burner up to 5 KW (depending on gas type)
- Center front: Economy burner up to 1 KW (depending on gas type)
- Center rear: standard burner up to 1.75 KW (depending on gas type)
- Right rear: High speed burner up to 3 KW (depending on gas type)
- Right front: Standard burner up to 1.75 KW (depending on gas type)

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
  NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU)
  Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar
  Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 53 x 750 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 492)
- Min. worktop thickness: 30 mm
- Power cord: 1 m
- Connected load: 12.5 KW

Dimensioned drawings

