B75MA-P33 (MS-7808v2.0) m-ATX Mainboard

Support 3rd Gen Intel® Core™ i7 / Core™ i5 / Core™ i3 / Pentium® / Celeron® processors for LGA 1155 socket

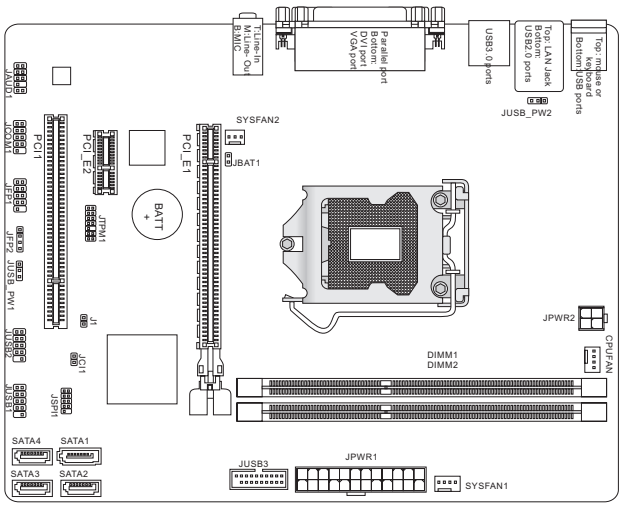



Mainboard Specification

Processor Support
- Support 3rd Gen Intel® Core™ i7 / Core™ i5 / Core™ i3 / Pentium® / Celeron® processors for LGA 1155 socket

Base Clock
- 100 MHz

Chipset
- Intel® B75 chipset

Memory Support
- 2 DIMMs support for DDR3-1066/1333/1600/1800*/2000*/2200*/2400 * MHz(OC, 22nm CPU required) up to 16GB max
- Supports Dual-Channel mode

LAN
- Supports Gb LAN 10/100/1000 Fast Ethernet by Realtek® RTL8111E

Audio
- Chip integrated by Realtek® ALC887
- Flexible 8-channel audio with jack sensing
- Compliant with Azalia 1.0 Spec

SATA
- 1 SATA 6Gb/s (SATA1) port by Intel® B75
- 3 SATA 3Gb/s (SATA2~4) ports by IIntel® B75

USB 3.0
- 4 USB 3.0 ports by Intel® B75 (rear x 2, front x 2)

Connectors
- Back panel
  - 1 PS/2 mouse/ keyboard port
  - 4 USB 2.0 ports
  - 2 USB 3.0 ports
  - 1 DVI port
  - 1 VGA port
  - 1 Parallel port
  - 1 LAN port
  - 3 flexible audio ports
- On-Board
  - 2 USB 2.0 connectors
  - 1 USB 3.0 connector
  - 1 Front Panel Audio connector
  - 1 TPM Module connector
  - 1 Serial connector
  - 1 Chassis Intrusion connector

Slots
- 1 x PCI Express 3.0 x16 slot
- 1 x PCI Express 2.0 x 1 slot
- 1 PCI slot, support 3.3V/ 5V PCI bus Interface

Form Factor
- m-ATX (244 X 190 mm)

Feature on Focus
- Click BIOS II
- M-Flash
- SATA 6Gb/s
- Small Business Advantage
- USB 3.0
- PCIE 3.0

Mounting
- 6 mounting holes

These specification is subject to change without prior notice.