


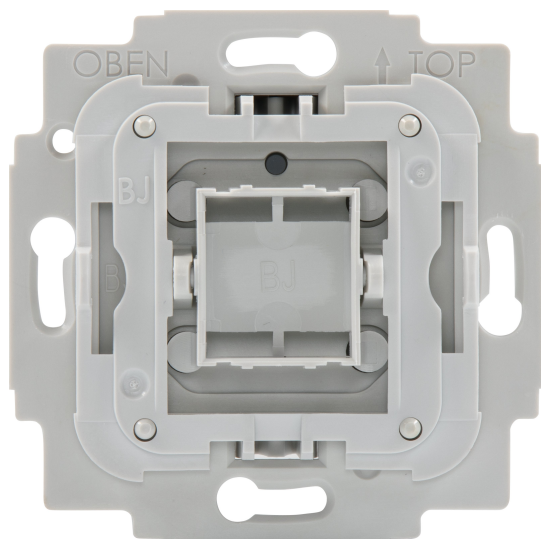

## On/Off switch flush mount, BJ

Compatible with Busch-Jaeger switch ranges

| EAN           | Colour     | Item no.  | Weight (Box) | Weight | Device (W x H x D)    | Box                     |
|---------------|------------|-----------|--------------|--------|-----------------------|-------------------------|
| 4019588394995 | light gray | 0300/9499 | 130 g        | 70 g   | 7.00 x 7.00 x 4.50 cm | 11.50 x 10.50 x 5.80 cm |

### TOP FEATURES

Integration/control with TechniSat CONNECT

Device for flush mounting in standard device boxes

Compatible with Busch-Jaeger switch ranges

Measuring of energy consumption

Integrated scene control

Integrated Z-Wave™ repeater function

Electronic overload protection

### AMBIENT STORAGE CONDITIONS

Temperature : -20 ... 60 °C

Humidity : 5 ... 90 %

### AMBIENT OPERATING CONDITIONS

IP class : 20

Humidity : 10 ... 75 %

Ambient temperature : 5 ... 35 °C

### FUNK COMMUNICATION

Telecommunication : Z-Wave Plus

funk\_security\_s2 : Yes

funk\_smartstart : Yes

Range inside : max. 40 m

operating frequency : 868.42 MHz

Repeater function : Yes

### POWER SUPPLY

Frequency : 50 Hz ± 10 %

Nominal voltage : 230 V ± 10 %

Effective output : 1150 W

Power consumption : < 2 mA (without load)

### SCOPE OF DELIVERY

Circuit-breaker insert, compensation frame, assembly instructions, fastening screws  
<br/>