


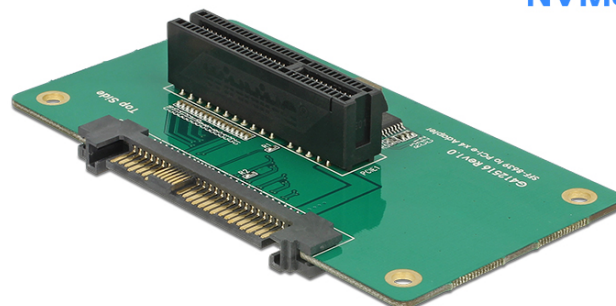

Delock Adapter U.2 SFF-8639 > PCIe x4 with fixing plate

Description

This adapter by Delock can be connected via U.2 interface to the system and provides a PCI Express x4 NVMe slot. To this slot it can be connected e.g. PCI Express cards with M.2 slot for M.2 PCIe modules.

U.2
NVMe

Specification

- Connectors:
 - 1 x U.2 SFF-8639 male >
 - 1 x PCI Express x4, V3.0
- Bootable, from UEFI version 2.3.1
- Supports NVM Express (NVMe)
- Maximum output current: 4 A
- Output voltage: 3.3 V
- Short circuit protection, over heating protection
- ESD protection up to 2 kV
- Dimensions (LxWxH):
 - adapter: ca. 85 x 45 x 15 mm
 - fixing plate: ca. 95 x 70 x 10 mm

System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux Kernel 3.20
- A free U.2 SFF-8639 interface

Package content

- Adapter
- Fixing plate
- Screws and spacer
- User manual

Item no. 62863

EAN: 4043619628636


Country of origin: Taiwan, Republic of China

Package: Retail Box





Images

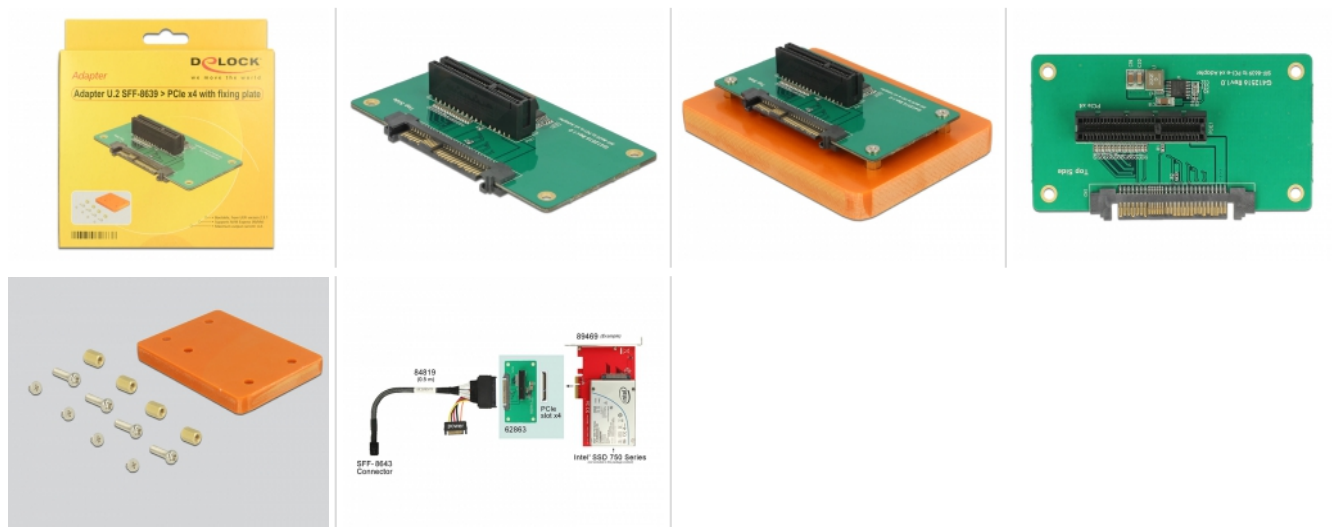

**General**

Function: NVM Express (NVMe)
Bootable, ex UEFI version 2.3.1

Supported operating system: Windows 7 32-bit
Windows 7 64-bit
Windows 8.1 32-bit
Windows 8.1 64-bit
Windows 10 32-bit
Windows 10 64-bit
ex Linux Kernel 3.2

Protection: ESD (Electrostatic Discharge)
Short circuit protection
Overheating protection

Interface

Connector 1: 1 x U.2 SFF-8639 male
Connector 2: 1 x PCI Express x4, V3.0

Technical characteristics

Voltage: 3.3 V output current