


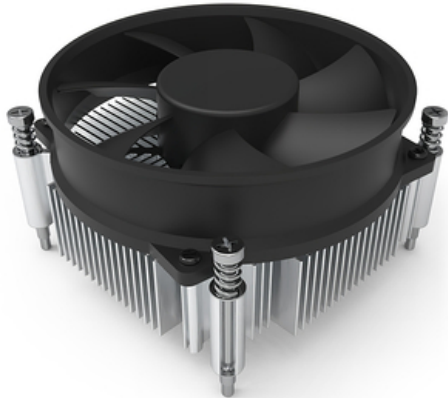

## EKL 22225

65W TDP Premium Cooler for INTEL<sup>®</sup>  
Socket LGA 1700 / 1851

### Optimum cooling performance for INTEL<sup>®</sup> processors

#### Product description

The EKL 22225 consists of an extrusion profile and dissipates the heat of your processor ideally and reliably. With a compact height of just 55 mm, this cooler is ideal for all compact PC systems, workstations or even normal office PCs. The built-in fan has a 4-pin connection and can therefore be controlled manually via the mainboard. This enables an adjustable speed range of 500 - 2,200 rpm. Thanks to the existing PWM signal, the fan operates depending on the utilisation of the CPU.

#### Main features

- ✓ Powerful top-flow design
- ✓ Secure and stable screw mounting with included backplate for Intel<sup>®</sup> socket LGA 17XX
- ✓ High-performance thermal paste
- ✓ Quiet and low-vibration 92 mm PWM fan

Advice & ordering:

☎ +49 (0)7561 9837-0

✉ [info@ekl-ag.de](mailto:info@ekl-ag.de)



\* Thermal and mechanical compatibility may vary depending on the system used  
\*\* According to manufacturer specifications

[www.ekl-ag.de](http://www.ekl-ag.de)

# EKL 22225 Technical data



## Cooler properties

|                       |                               |
|-----------------------|-------------------------------|
| Retail article number | 22210021025                   |
| EAN Retail            | 4250280354836                 |
| Power loss            | 65W TDP                       |
| Material              | Aluminium                     |
| Weight                | 340 g                         |
| Packaging unit        | 30 Cooler / box               |
| suitable for          | INTEL® Socket LGA 17XX / 1851 |



## Fan properties

|                   |                   |
|-------------------|-------------------|
| Width             | 95 mm             |
| Length            | 95 mm             |
| Height            | 55 mm             |
| Speed min.        | 500 U/min         |
| Speed max.        | 1800 U/min        |
| Warehouse         | Hydraulic bearing |
| Operating voltage | 12 VDC            |
| Volume flow       | 77.81 m³/h        |
| Noise level min.  | 12 dB(A)          |
| Noise level max.  | 25.7 dB(A)        |
| Service life L10  | 20000 h bei 40 °C |



\* Thermal and mechanical compatibility may vary depending on the system used  
\*\* According to manufacturer specifications

# EKL 22225 Dimensions

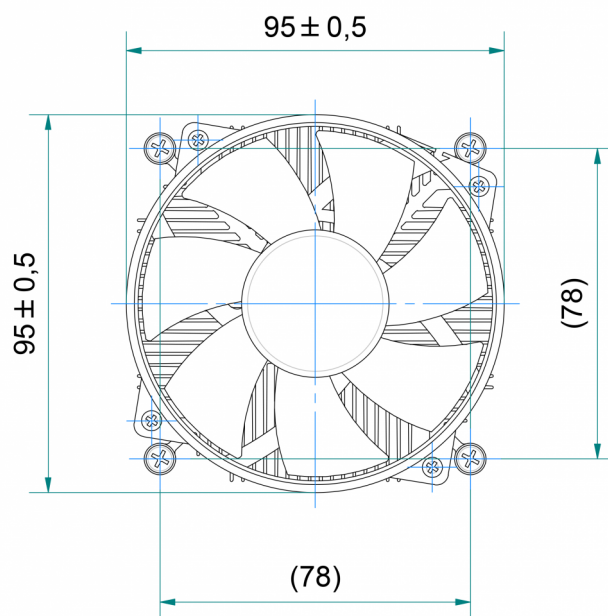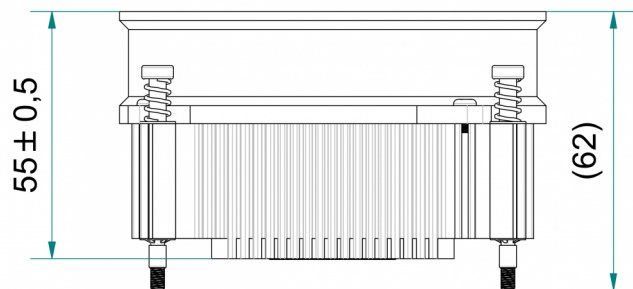

\* Thermal and mechanical compatibility may vary depending on the system used  
\*\* According to manufacturer specifications

[www ekl-ag.de](http://www ekl-ag.de)

**EKL**<sup>®</sup>  
electronics cooling