


PCI Express x4 Card to 1 x M.2 Key B + 1 x NVMe M.2 Key M - Low Profile Form Factor

Description

This PCI Express card by Delock expands the PC by two M.2 slots. One M.2 SATA module can be connected in format 22110, 2280, 2260, 2242, 2230 with this card and connected via SATA cable to the motherboard. Additionally, one M.2 PCIe module in format 22110, 2280, 2260, 2242, 2230 can be connected. Both slots can be used at the same time.

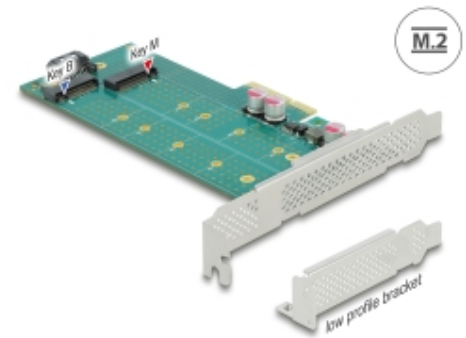

Item no. 89047

EAN: 4043619890477

Country of origin: China

Package: White Box

Technical details

- Connectors:
internal:
1 x 67 pin M.2 key B slot
1 x 67 pin M.2 key M slot
1 x PCI Express x4, V4.0
1 x SATA 6 Gb/s 7 pin plug
- Interface: SATA / PCIe
- Supports one M.2 module in format 22110, 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA and one M.2 module in format 22110, 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- 2 x LED indicator
- Bootable
- Supports NVM Express (NVMe)
- Humidity: 15 ~ 90 %
- Operating temperature: 5 °C ~ 50 °C
- Storage temperature: -25 °C ~ 70 °C


System requirements

- Linux Kernel 4.6.4 or above
- Windows Server 2016
- Windows 8.1/8.1-64/10/10-64
- PC with one free PCI Express x4 / x8 / x16 / x32 slot

Package content

- PCI Express card
- Low profile bracket
- Mounting material
- User manual

Images

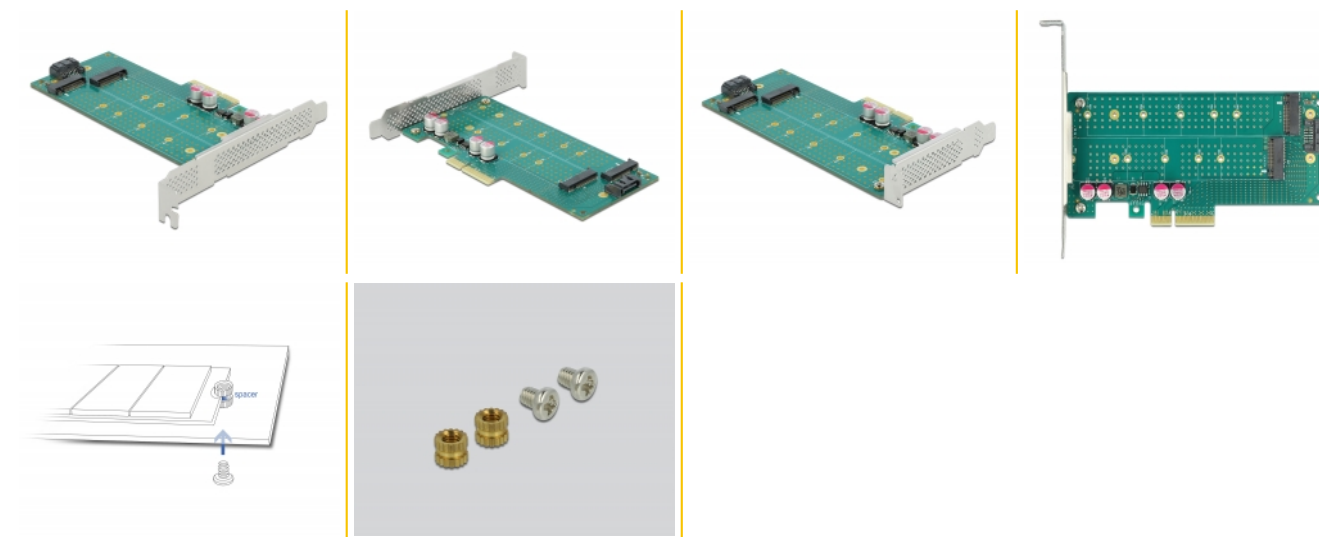

Allgemein

Funktion:	NVM Express (NVMe) Bootfähig
Unterstütztes Betriebssystem:	Linux Kernel 4.6.4 oder höher Windows 10 32-Bit Windows 10 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows Server 2016
LED Anzeige:	2 x
Slot:	SATA PCIe
Unterstütztes Modul:	M.2 Module im Format 22110, 2280, 2260, 2242 und 2230 mit Key B oder Key B+M auf SATA Basis M.2 Module im Format 22110, 2280, 2260, 2242 und 2230 mit Key M oder Key B+M auf PCIe Basis
Maximale Höhe der Komponenten auf dem Modul:	1,5 mm, Verwendung von zweiseitig bestückten Modulen möglich

Schnittstelle

Intern:	1 x 67 Pin M.2 Key B Slot 1 x 67 Pin M.2 Key M Slot 1 x SATA 6 Gb/s 7 Pin Stecker 1 x PCI Express x4, V4.0
---------	---

Physikalische Eigenschaften

Slotblende:	Standard Low Profile
-------------	-------------------------

Manufacturer information

Street	Beeskowdamm 13/15
Postal code	14167
City	Berlin
Country	Deutschland
E-Mail	info@delock.de
Website	www.delock.de