



Binary input, 4gang for ABB-free@home®

Functions at a glance

- The device detects AC/DC signals of 10 - 230 V via 4 channels. The information of the signal evaluation can be used for controlling ABB-free@home® actuators or for recording status information.
- The bus can be connected via enclosed terminal block.
- Bus voltage: 24 V
- Protection class (device): IP 20
- Temperature range (device): -5 °C - 45 °C
- Storage temperature range: -25 °C - 55 °C
- Transport temperature range: -25 °C - 70 °C
- Dimensions: (L x W x D): 90 mm x 36 mm x 64 mm
- Module width: 2
- Programming only with bus voltage applied via the web interface of the System Access Point.
- Additional information about commissioning and operation is contained in the system manual and the online operating manual of the current Online-Catalogue.

Order details

Article No.:	6241/4.0
Order No.:	2CKA006220A0006
EAN:	4011395180372
Customs tariff number:	85389091
Price group:	25
Price:	175,00 EUR plus VAT

Downloads


Instruction manual

- » [Installation and operating instructions](#)
- » [Product manual](#)


Technical manual

- » [System manual](#)

Dimensions

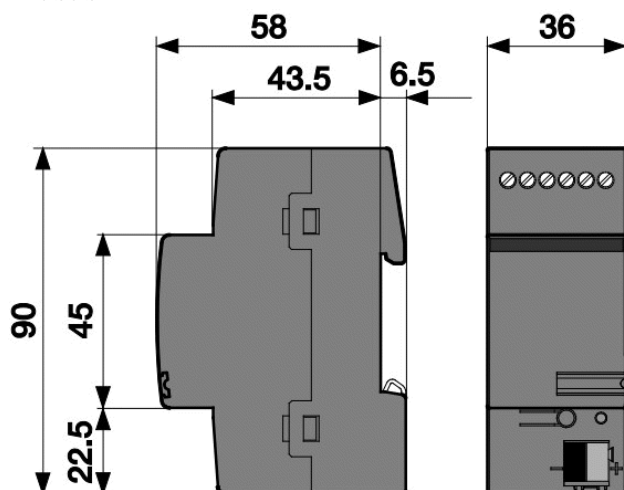

Wiring diagram

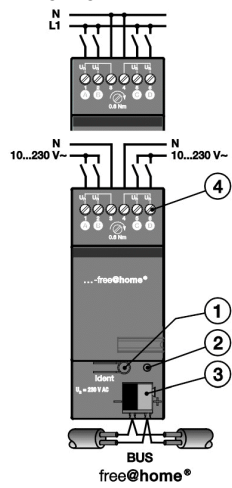

- [1] Geräteidentifikation während der Inbetriebnahme
- [2] Identifikations-LED
- [3] Busanschlussklemme
- [4] Anschlussklemmen für thermische Stellantriebe