
ROHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE

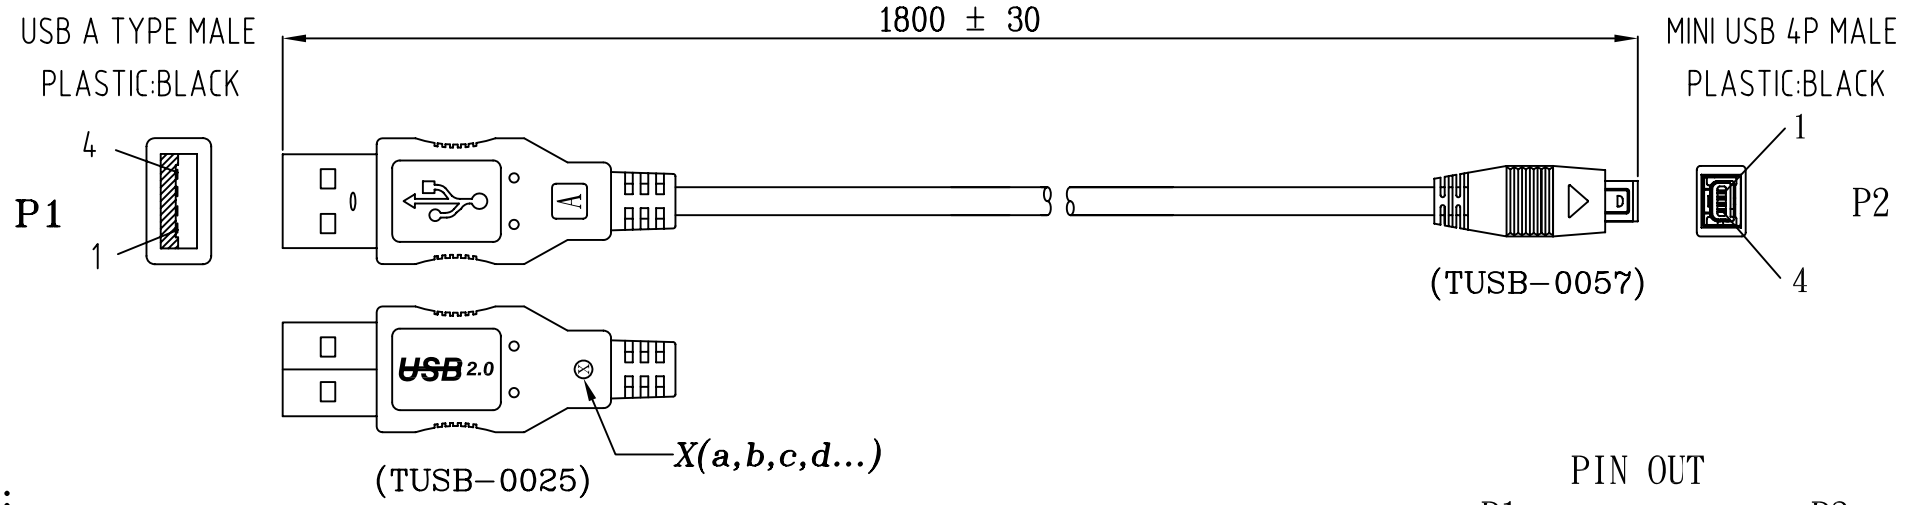

NOTES:

1.CABLE:

UL-2725 [28AWG(7/0.127 T.C)*1PAIR+28AWG(7/0.127 T.C)*2C +AL/MY+DRAIN WIRE+BRAID(65% ALUMINUM)] PVC JACKET; OD:ø3.8±0.15mm COLOR:MATT BLACK(NK-K01) REV 2.0,***(C2725525BA)***

2.CONNECTORS:

P1:USB A TYPE MALE GOLD PLASH CONTACT, NICKEL PLATED SHELL.

P2:MINI USB 4P MALE GOLD FLASH CONTANT NICKEL PLATED SHELL OR EQUIVALENT (HIROSE).

3.HOOD:MOLDED TYPE, PVC 45P, COLOR:BLACK(NK-K01)

4.ELECTRICAL TEST:

<1>.100% OPEN SHORT & MIS WIRE TEST.

<2>.CONTACT RESISTANCE 3 Ohms MAX.


<3>.INSULATION RESISTANCE 10M Ohms MIN.

5.PACKING:<1>EACH PC/POLYBAG+EAN CODE LABEL & ROHS LABEL

<2>EACH CARTON/ROHS LABEL(L*W=35*22mm)+EAN CODE LABEL

<3>EAN CODE: 4260113564196

PIN OUT

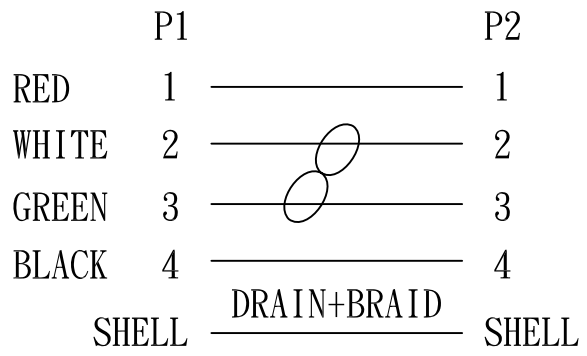

Tolerance	Inch	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

Draw FANNIE 02/26/07'

Chek

Engr

2DIRECT GMBH

Title: USB 2.0 AM / HIROSE MINI USB 4P B CABLE


Customer P/N: CU0018

App'd | Customer: E-DIR

Scale: NONE | Units: m/m | Third Angle Projection

Dwg No. 170-3047 | REV:A | Sheet 1/2

LTR	REV.	DESCRIPTION	DATE

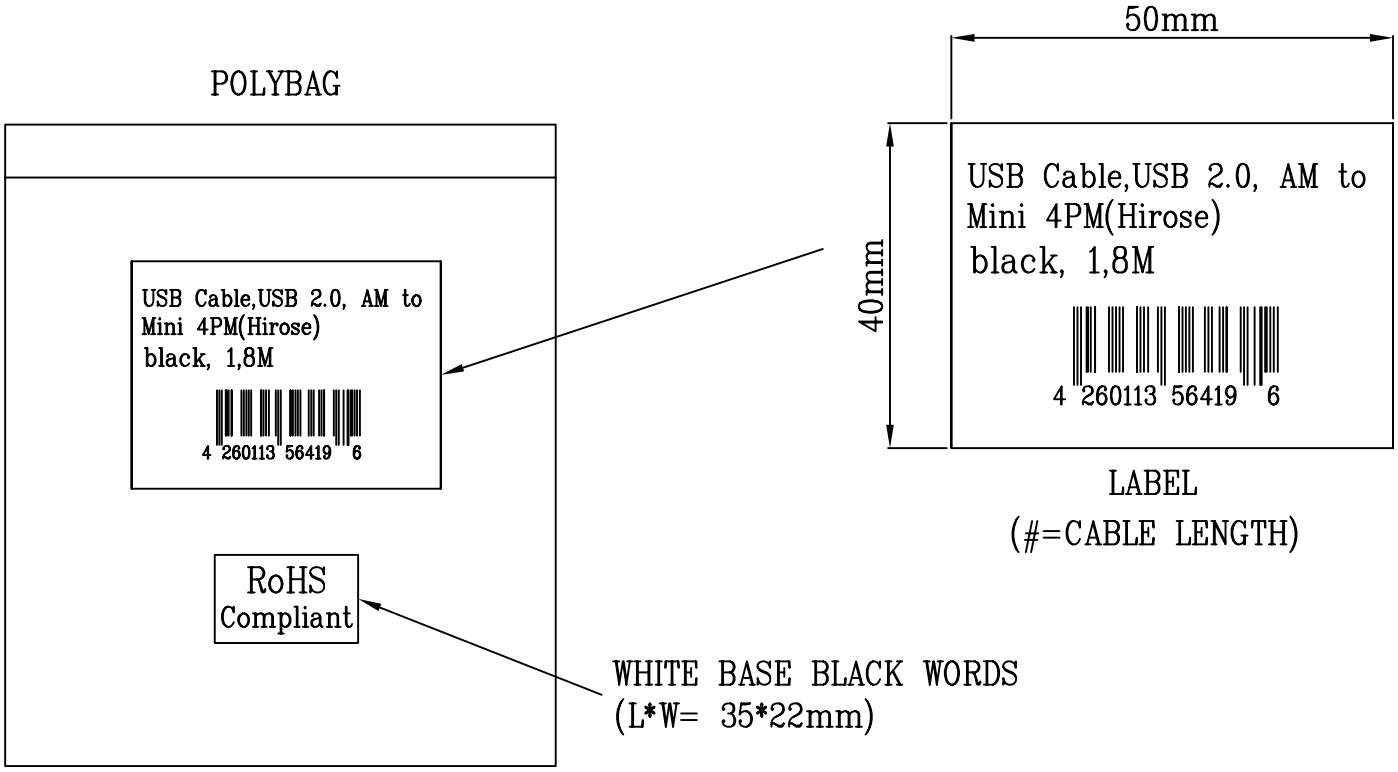

Tolerance	Inch	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

Draw FANNIE 02/26/07'

Chek

Engr

Title
USB 2.0 AM / HIROSE MINI USB 4P B CABLE

Customer P/N: CU0018

App'd

Customer: E-DIR

Scale NONE Units m/m Third Angle Projection

Dwg No. 170-3047 REV:A Sheet 2/2