


AIROS ECO SILENT WALL

System design with highest quality

NEW

CasaFan
VENTILATOREN



COMMERCIAL USE

Certified in accordance with Machinery Directive 2006/42/EC, part 1 for commercial use.



AIROS ECO SILENT WALL SW

#60509

Wall fan black

- Innovative, patented impeller with 18 blades and 2 blade circles for lowest noise and highest air performance.
- This fan is approx. 20 dB(A) quieter than e.g. the industrial wind machine WM3 Wall Eco with the same air performance!
- 6 finely graduated speed levels adjustable by means of pushbutton or remote control. An additional low level creates a super gentle breeze at only 13.2 dB(A)*.
- Housing, protective grille and wall bracket black, impeller plastic transparent.
- Vertical inclination from -39° to +18° adjustable.
- Switch-off timer 1 to 9 hours.
- Electronic 90° oscillation, can be switched off.
- 2.5 m rubber sheathed cable, H05RN-F G 3 1.0 mm² with Schuko plug.
- Maximum air flow 10,023 m³/h.**
- Easy-care plastic housing with painted protective grille made of high-quality metal.



Included remote control with magnetic wall bracket and digital level display


Product	Code No.	Colour
AIROS ECO SILENT WALL	64509	black

Technical details

Power motor (W)	4,2 - 90	Rpm min ⁻¹	850 max.
Voltage (V/Hz)	220-240/~50	Oscillation (°)	90
No. of speeds	6 + 1	Wight (kg)	6.3
Sound pressure (L _p -3m) dB(A)	35.6	Sound power (L _w) dB(A)	56.1
Airflow (m ³ /h)**	10,023	Service value (m ³ /min/W)	1.92

Dimensions (mm)

Fan blade Ø	442
Fan grille Ø	540
Cage inclination approx.	-39°/18°

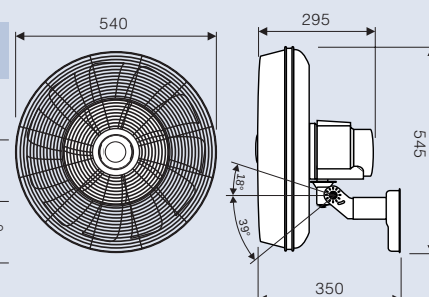

Ambient temperature -10 to <+40 °C.

* sound pressure LP -3 m
** measured in accordance with IEC 60879