



IB-1917M-C32

USB 3.2 Gen 2x2

20 Gbit/s

ICY BOX IB-1917M-C32

USB 3.2 Gen 2x2 Type-C® enclosure for M.2 NVMe SSD



Key features

- Top performance - USB Type-C® 3.2 Gen 2x2 and PCIe 3.0 x4 with speeds up to 2000 MB/s
- Safely cooled - aluminium enclosure with heat sink design
- For M.2 NVMe SSD - M-Key socket for 22x 30/42/60/80 mm
- Backwards compatible - for all USB 3.2 Gen 1/Gen 2 Type-C® ports
- Plug & Play - Plug in and go, instantly and easily

Packing content

1x IB-1917M-C32, 1x USB Type-C® to Type-C® cable, 1x Screw set incl. screwdriver, 1x Manual

Technical data

Model	IB-1917M-C32
Article no.	61057
EAN code	4250078173823
Colour	Black
Material	Aluminium
Interface to host computer	USB 3.2 Gen 2x2 Type-C®
Transfer rate	Up to 20 Gbit/s
Socket	M-Key
M.2 card size	22 x 30/42/60/80
M.2 interface	PCIe 3.0 x4 (NVMe)
Supported M.2 card keys	M.2 PCIe NVMe SSD

SSD capacity

Up to 2 TB

Plug & Play

Yes

LED

Power and access

Cooling

Passive

Power supply

USB powered

Operating system

Windows®

System requirements

One free USB 3.2 Gen 2x2 Type-C® port or one free USB4® Gen 3x2 port.

The enclosure only provides the full data transfer rate of up to 20 Gbit/s via a USB 3.2 Gen 2x2 USB Type-C® host interface.

The enclosure works on devices with a Thunderbolt™ 3/4 Type-C® interface only with a transfer rate of up to 10 Gbit/s specified by USB 3.2 Gen 2.



IB-1917M-C32
USB 3.2 Gen 2x2


20 Gbit/s

ICY BOX **IB-1917M-C32** USB 3.2 Gen 2x2 Type-C® enclosure for M.2 NVMe SSD



Fire up the data turbo

Benefit from maximum performance via USB 3.2 Gen 2x2 with impressive data transfer rates of up to 20 Gbit/s, which corresponds to approx. 2.5 GB/s. Thanks to the modern USB Type-C® connection, annoying charging and waiting times are a thing of the past.

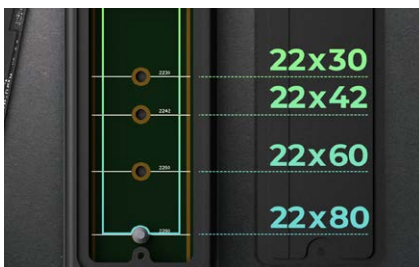

Speed up the workflow

With high data transfer rates and a peak performance M.2 NVMe SSD in sizes 22x 30/42/60 or 80 mm, you accelerate your workflow immediately. Enjoy unrestricted speed for data backup, important programmes, and copying media or data.



Plug & Play

The aluminium housing features Plug & Play. Install your storage and get started immediately. There is no need to install drivers or additional software. The integrated status LED keeps you informed about operation and access to the data carrier.

Logistical data

Packing unit: 40 pcs. / carton
Total weight: 10.360 kg
Gross weight: (with packing): 0.236 kg
Net weight: 0.144 kg

Dimension/Carton: 500x220x300 mm
Dimension (with packing): 27x105x200 mm
Dimension of article: 113x50x16 mm
Country of Origin: Taiwan