




Gigabit PoE Repeater, kaskadierbar

Product Images

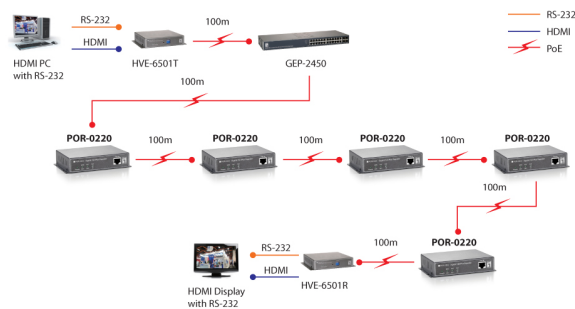

Short Description

High-Power-Midspan-PoE-konform zur Vereinfachung von Bereitstellung und Installation Erweiterte Gigabit PoE-Verbindung für weitere 100 Meter 2 integrierte Ausgänge für 1 PoE und 1 Non-PoE-Geräte Einfache Plug-and-Play-Installation Keine zusätzliche Stromversorgung erforderlich Mehrere PoE-Verstärker können durch Daisy-Chain zur Reichweitenverlängerung eingesetzt werden 802.3af/802.3at/High-Power PoE an Remote-Gerät

Beschreibung

Extend the reach of your Gigabit PoE-Plus devices For system integrators looking for a professional solution to help extend their Gigabit PoE (802.3af/at) network, POR-0220 is the perfect accessory to increase your network performance. Normal cable runs only reach 100 meters, but with POR-0220 installers can extend the PoE network performance up to 200 meters. Furthermore, you can triple your range or even more by daisy-chaining* multiple PoE repeaters. * Maximum distance depends on the required Wattage of the PD. Simple yet durable, no software required As a Gigabit PoE-Plus Repeater, POR-0220 receives all power from the Power Sending Equipment (PSE), such as a Gigabit PoE-Plus switch. This means that POR-0220 uses no external power supply, making it the most flexible option for system integrators looking for an easy, affordable solution to increase the distance to the attached devices on a network. POR-0220 has 3 RJ-45 ports for easy deployment, 1 "IN" port that accepts the power and data for the first 100 meters, and 2 "OUT" ports for 1 PoE (power + data) and 1 non-PoE (data only) installation, that boosts and extends the device an additional 100 meters. With a durable metal housing, POR-0220 fits into any tight deployments. Applications POR-0220 is a long-ranged solution for deploying PoE IP Digital Signage and any Gigabit PoE PD powered by 802.3at Gigabit PSE.

Additional Information

Max. Luftfeuchtigkeit im Betrieb (%)	95
Max. Betriebstemperatur in °C	50
Min. Luftfeuchtigkeit im Betrieb (%)	5
Indikator	Power, PoE In, PoE Out
Befestigung	Wall mount
Standards	IEEE 802.3 10Base-T, Ethernet IEEE 802.3u 100Base-TX, Fast Ethernet IEEE802.3ab 1000Base-T, Gigabit Ethernet IEEE 802.3x Ethernet Flow Control
Produktgewicht (kg)	0,4
Produktbreite (mm)	130
Produkttiefe (mm)	90
Produkthöhe (mm)	28
Farbe	Grey
EAN	4015867185612
Modellnummer	POR-0220
Lieferumfang	POR-0220 Quick Installation Guide
802.3af/at PoE	2

