

## Anex

XPG Pylon 550W (#2)

Lab ID#: AD55001780  
Receipt Date: Jan 8, 2021  
Test Date: Jan 20, 2021

Report: 21PS1780A

Report Date: Jan 29, 2021

### DUT INFORMATION

|                    |                         |
|--------------------|-------------------------|
| Brand              | XPG                     |
| Manufacturer (OEM) | Channel Well Technology |
| Series             | Pylon                   |
| Model Number       | PYLON550B-BKCAU         |
| Serial Number      | 4K3680396225            |
| DUT Notes          |                         |

### DUT SPECIFICATIONS

|                        |                                                |
|------------------------|------------------------------------------------|
| Rated Voltage (Vrms)   | 100-240                                        |
| Rated Current (Arms)   | 8-4                                            |
| Rated Frequency (Hz)   | 50-60                                          |
| Rated Power (W)        | 550                                            |
| Type                   | ATX12V                                         |
| Cooling                | 120mm Fluid Dynamic Bearing Fan (HA1225H12F-Z) |
| Semi-Passive Operation | X                                              |
| Cable Design           | Fixed cables                                   |

### POWER SPECIFICATIONS

| Rail                 |       | 3.3V | 5V | 12V  | 5VSB | -12V |
|----------------------|-------|------|----|------|------|------|
| Max. Power           | Amps  | 20   | 20 | 45.5 | 2.5  | 0.3  |
|                      | Watts | 110  |    | 546  | 12.5 | 3.6  |
| Total Max. Power (W) |       | 550  |    |      |      |      |

### CABLES AND CONNECTORS

#### Native Cables

| Description                                              | Cable Count | Connector Count (Total) | Gauge    | In Cable Caps |
|----------------------------------------------------------|-------------|-------------------------|----------|---------------|
| ATX connector 20+4 pin (660mm)                           | 1           | 1                       | 18-22AWG | No            |
| 4+4 pin EPS12V (670mm)                                   | 1           | 1                       | 18AWG    | No            |
| 6+2 pin PCIe (560mm+150mm)                               | 1           | 2                       | 18AWG    | No            |
| SATA (560mm+150mm+150mm) / 4-pin Molex (+150mm)          | 1           | 3 / 1                   | 18AWG    | No            |
| SATA (560mm+150mm) / 4-pin Molex (+150mm) / FDD (+150mm) | 1           | 2 / 1 / 1               | 18-20AWG | No            |

#### Modular Cables

|                                      |   |   |       |   |
|--------------------------------------|---|---|-------|---|
| AC Power Cord (1420mm) - C13 coupler | 1 | 1 | 18AWG | - |
|--------------------------------------|---|---|-------|---|

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 1/15

## Anex

XPG Pylon 550W (#2)

### RESULTS

|                             |                 |
|-----------------------------|-----------------|
| Temperature Range (°C /°F)  | 30-32 / 86-89.6 |
| ErP Lot 3/6 Ready           | ✓               |
| (EU) No 617/2013 Compliance | ✓               |

#### 115V

|                                           |             |
|-------------------------------------------|-------------|
| Average Efficiency                        | 84.938%     |
| Efficiency With 10W (≤500W) or 2% (>500W) | 62.839      |
| Average Efficiency 5VSB                   | 79.801%     |
| Standby Power Consumption (W)             | 0.0378384   |
| Average PF                                | 0.988       |
| Avg Noise Output                          | 31.89 dB(A) |
| Efficiency Rating (ETA)                   | BRONZE      |
| Noise Rating (LAMBDA)                     | S++         |

#### 230V

|                               |             |
|-------------------------------|-------------|
| Average Efficiency            | 87.136%     |
| Average Efficiency 5VSB       | 78.382%     |
| Standby Power Consumption (W) | 0.0771524   |
| Average PF                    | 0.961       |
| Avg Noise Output              | 30.29 dB(A) |
| Efficiency Rating (ETA)       | SILVER      |
| Noise Rating (LAMBDA)         | S++         |

### TEST EQUIPMENT

|                    |                                                                             |
|--------------------|-----------------------------------------------------------------------------|
| Electronic Loads   | Chroma 63601-5 x4<br>Chroma 63600-2 x2<br>63640-80-80 x20<br>63610-80-20 x2 |
| AC Sources         | Chroma 6530, Keysight AC6804B                                               |
| Power Analyzers    | N4L PPA1530 x2                                                              |
| Sound Analyzer     | Bruel & Kjaer 2270 G4                                                       |
| Microphone         | Bruel & Kjaer Type 4955-A                                                   |
| Data Loggers       | Picoscope TC-08 x2, Labjack U3-HV x2                                        |
| Tachometer         | UNI-T UT372 x2                                                              |
| Digital Multimeter | Keysight U1273AX, Fluke 289, Keithley 2015 - THD                            |
| UPS                | CyberPower OLS3000E 3kVA x2                                                 |

### HOLD-UP TIME & POWER OK SIGNAL (230V)

|                                       |      |
|---------------------------------------|------|
| Hold-Up Time (ms)                     | 14.5 |
| AC Loss to PWR_OK Hold Up Time (ms)   | 11.6 |
| PWR_OK Inactive to DC Loss Delay (ms) | 2.9  |

All data and graphs included in this test report can be used by any individual on the following conditions:


- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 2/15

### EFFICIENCY UNDER HIGH AMBIENT TEMPERATURE

#### Efficiency: XPG Pylon 550W

Ambient: 33°C - 40°C (91.4°F - 104°F)

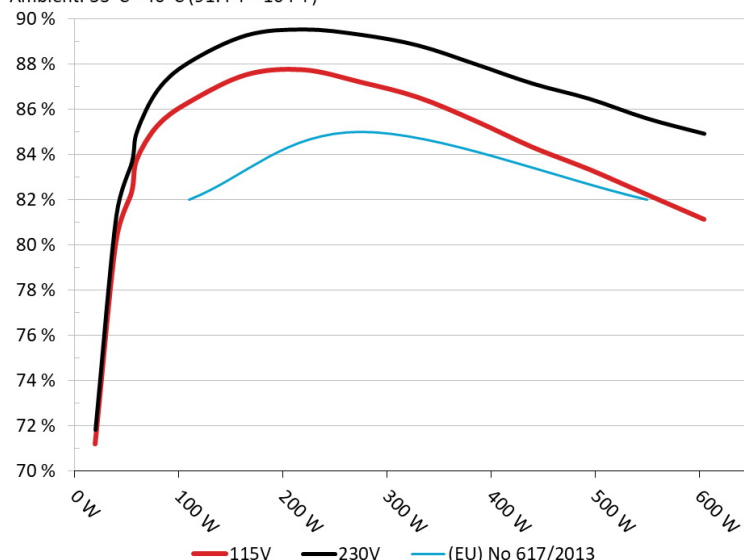


#### INFO

The PSU's efficiency under high ambient temperatures with 115V and 230V input. For this graph the results of the 10-110% load regulation table are used

### 5VSB EFFICIENCY

#### 5VSB Efficiency: XPG Pylon 550W

Ambient: 28°C - 32°C (82.4°F - 89.6°F)

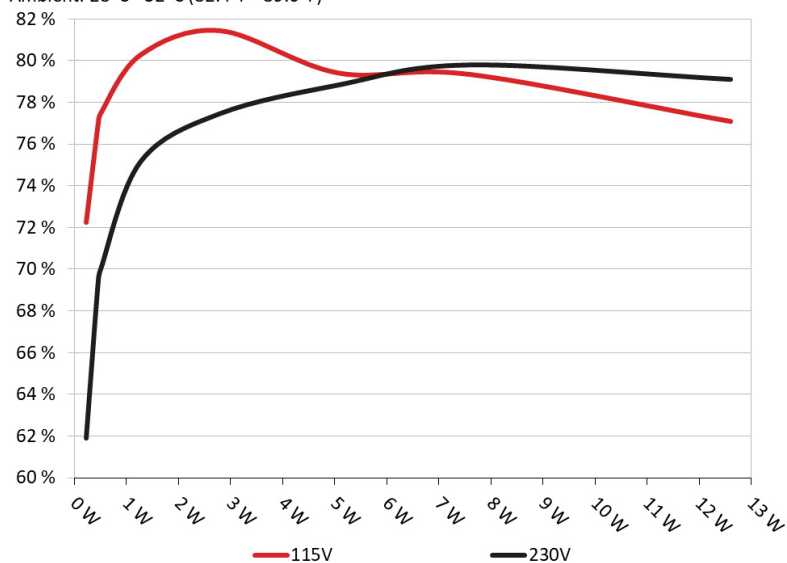

#### INFO

This graph depicts the efficiency levels of the 5VSB rail with 115V and 230V input

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

## Anex

XPG Pylon 550W (#2)

### 5VSB EFFICIENCY -115V (ERP LOT 3/6 & CEC)

| Test # | 5VSB   | DC/AC (Watts) | Efficiency | PF/AC Volts |
|--------|--------|---------------|------------|-------------|
| 1      | 0.045A | 0.229         | 72.240%    | 0.037       |
|        | 5.093V | 0.317         |            | 115.16V     |
| 2      | 0.090A | 0.458         | 76.975%    | 0.068       |
|        | 5.092V | 0.595         |            | 115.16V     |
| 3      | 0.550A | 2.797         | 81.426%    | 0.277       |
|        | 5.083V | 3.435         |            | 115.15V     |
| 4      | 1.000A | 5.075         | 79.396%    | 0.363       |
|        | 5.074V | 6.392         |            | 115.15V     |
| 5      | 1.500A | 7.596         | 79.332%    | 0.414       |
|        | 5.063V | 9.575         |            | 115.12V     |
| 6      | 2.500A | 12.610        | 77.078%    | 0.473       |
|        | 5.043V | 16.360        |            | 115.12V     |

### 5VSB EFFICIENCY -230V (ERP LOT 3/6 & CEC)

| Test # | 5VSB   | DC/AC (Watts) | Efficiency | PF/AC Volts |
|--------|--------|---------------|------------|-------------|
| 1      | 0.045A | 0.229         | 61.892%    | 0.013       |
|        | 5.093V | 0.370         |            | 230.35V     |
| 2      | 0.090A | 0.458         | 69.394%    | 0.023       |
|        | 5.092V | 0.660         |            | 230.34V     |
| 3      | 0.550A | 2.796         | 77.452%    | 0.117       |
|        | 5.083V | 3.610         |            | 230.36V     |
| 4      | 1.000A | 5.075         | 78.829%    | 0.188       |
|        | 5.074V | 6.438         |            | 230.37V     |
| 5      | 1.500A | 7.596         | 79.790%    | 0.243       |
|        | 5.063V | 9.520         |            | 230.37V     |
| 6      | 2.501A | 12.611        | 79.096%    | 0.315       |
|        | 5.043V | 15.944        |            | 230.35V     |

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 4/15

**Anex**

XPG Pylon 550W (#2)


# 115V

All data and graphs included in this test report can be used by any individual on the following conditions:

- › It should be mentioned that the test results are provided by Cybenetics
- › The link to the original test results document should be provided in any case

**PAGE 5/15**


### EFFICIENCY GRAPH 115V

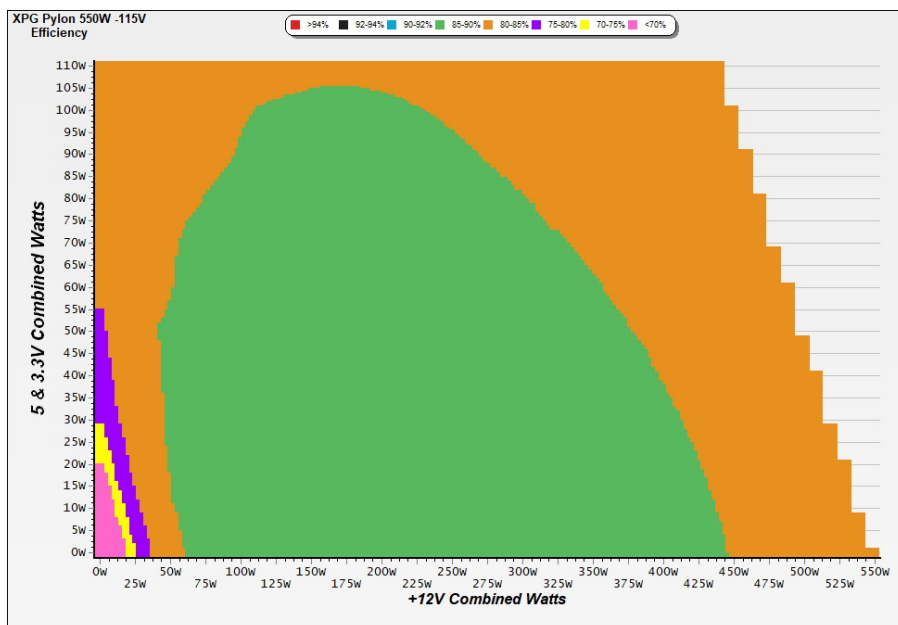

#### INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations

### NOISE GRAPH 115V

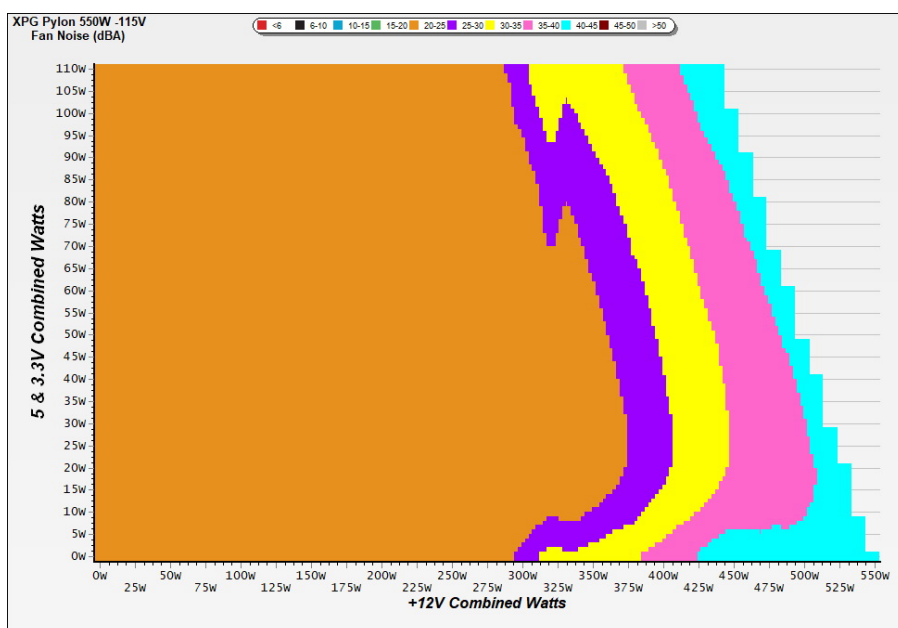

#### INFO

The PSU's noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails

All data and graphs included in this test report can be used by any individual on the following conditions:


- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

Anex

XPG Pylon 550W (#2)

## VAMPIRE POWER -115V

Power - 4K3680396225 - 15/01/2021 - 10:53

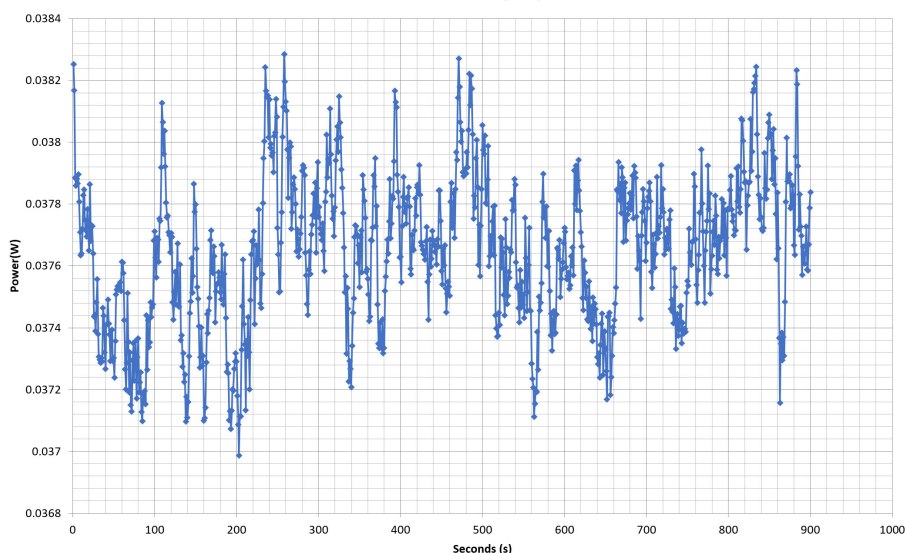

### INFO

*This graph is generated by the PPA Standby Power Analysis software which takes full control of the power analyzer during the whole procedure. This application features all of the EN50564 & IEC62301 test limits for standby power software testing*

All data and graphs included in this test report can be used by any individual on the following conditions:

- › It should be mentioned that the test results are provided by Cybenetics
- › The link to the original test results document should be provided in any case

PAGE 7/15

## Anex

XPG Pylon 550W (#2)

### 10-110% LOAD TESTS 115V

| Test # | 12V     | 5V      | 3.3V    | 5VSB   | DC/AC<br>(Watts) | Efficiency | Fan Speed<br>(RPM) | PSU Noise<br>(dB[A]) | Temps<br>(In/Out) | PF/AC<br>Volts |
|--------|---------|---------|---------|--------|------------------|------------|--------------------|----------------------|-------------------|----------------|
| 1      | 2.727A  | 1.983A  | 1.992A  | 0.988A | 54.960           | 82.331%    | 864                | 22.1                 | 35.50°C           | 0.963          |
|        | 12.231V | 5.045V  | 3.313V  | 5.063V | 66.755           |            |                    |                      | 40.13°C           | 115.12V        |
| 2      | 6.476A  | 2.976A  | 2.991A  | 1.188A | 110.031          | 86.325%    | 866                | 22.0                 | 35.86°C           | 0.981          |
|        | 12.218V | 5.043V  | 3.310V  | 5.050V | 127.462          |            |                    |                      | 41.37°C           | 115.09V        |
| 3      | 10.567A | 3.473A  | 3.491A  | 1.390A | 165.028          | 87.543%    | 872                | 21.8                 | 36.45°C           | 0.987          |
|        | 12.205V | 5.041V  | 3.308V  | 5.038V | 188.511          |            |                    |                      | 42.77°C           | 115.09V        |
| 4      | 14.666A | 3.970A  | 3.995A  | 1.592A | 220.034          | 87.763%    | 877                | 21.8                 | 36.50°C           | 0.990          |
|        | 12.193V | 5.039V  | 3.305V  | 5.027V | 250.714          |            |                    |                      | 43.53°C           | 115.09V        |
| 5      | 18.434A | 4.966A  | 4.998A  | 1.796A | 275.029          | 87.216%    | 882                | 22.1                 | 37.23°C           | 0.992          |
|        | 12.179V | 5.036V  | 3.303V  | 5.014V | 315.344          |            |                    |                      | 45.00°C           | 115.11V        |
| 6      | 22.210A | 5.958A  | 6.000A  | 2.000A | 330.019          | 86.546%    | 888                | 23.1                 | 37.40°C           | 0.994          |
|        | 12.166V | 5.036V  | 3.301V  | 5.001V | 381.323          |            |                    |                      | 45.83°C           | 115.09V        |
| 7      | 26.004A | 6.950A  | 7.004A  | 2.207A | 385.104          | 85.506%    | 1075               | 27.4                 | 38.48°C           | 0.994          |
|        | 12.152V | 5.035V  | 3.299V  | 4.986V | 450.385          |            |                    |                      | 47.94°C           | 115.10V        |
| 8      | 29.801A | 7.952A  | 8.009A  | 2.414A | 440.109          | 84.338%    | 1399               | 34.8                 | 38.86°C           | 0.994          |
|        | 12.137V | 5.032V  | 3.296V  | 4.972V | 521.842          |            |                    |                      | 48.82°C           | 115.13V        |
| 9      | 33.996A | 8.453A  | 8.499A  | 2.418A | 494.608          | 83.356%    | 1745               | 40.7                 | 39.09°C           | 0.994          |
|        | 12.122V | 5.029V  | 3.294V  | 4.964V | 593.370          |            |                    |                      | 49.80°C           | 115.10V        |
| 10     | 38.198A | 8.956A  | 9.022A  | 2.523A | 549.716          | 82.250%    | 2084               | 45.4                 | 39.86°C           | 0.994          |
|        | 12.108V | 5.026V  | 3.292V  | 4.955V | 668.347          |            |                    |                      | 51.18°C           | 115.13V        |
| 11     | 42.810A | 8.959A  | 9.026A  | 2.527A | 604.954          | 81.144%    | 2340               | 46.5                 | 40.05°C           | 0.994          |
|        | 12.094V | 5.024V  | 3.290V  | 4.948V | 745.528          |            |                    |                      | 52.68°C           | 115.11V        |
| CL1    | 0.117A  | 13.000A | 12.997A | 0.000A | 109.891          | 80.183%    | 904                | 22.8                 | 37.82°C           | 0.982          |
|        | 12.211V | 5.044V  | 3.300V  | 5.046V | 137.050          |            |                    |                      | 45.11°C           | 115.16V        |
| CL2    | 45.520A | 0.999A  | 1.001A  | 1.000A | 564.530          | 82.962%    | 2073               | 45.1                 | 39.52°C           | 0.994          |
|        | 12.109V | 5.030V  | 3.299V  | 5.001V | 680.468          |            |                    |                      | 51.51°C           | 115.09V        |

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 8/15

## Anex

XPG Pylon 550W (#2)

### 20-80W LOAD TESTS 115V

| Test # | 12V     | 5V     | 3.3V   | 5VSB   | DC/AC<br>(Watts) | Efficiency | Fan Speed<br>(RPM) | PSU Noise<br>(dB[A]) | PF/AC Volts |
|--------|---------|--------|--------|--------|------------------|------------|--------------------|----------------------|-------------|
| 1      | 1.213A  | 0.493A | 0.498A | 0.197A | 19.988           | 71.203%    | 855                | 21.7                 | 0.899       |
|        | 12.239V | 5.048V | 3.316V | 5.086V | 28.072           |            |                    |                      | 115.12V     |
| 2      | 2.426A  | 0.991A | 0.994A | 0.394A | 39.978           | 80.160%    | 859                | 21.8                 | 0.949       |
|        | 12.235V | 5.046V | 3.314V | 5.079V | 49.873           |            |                    |                      | 115.10V     |
| 3      | 3.643A  | 1.487A | 1.493A | 0.592A | 60.007           | 83.790%    | 862                | 22.0                 | 0.965       |
|        | 12.231V | 5.045V | 3.313V | 5.071V | 71.616           |            |                    |                      | 115.09V     |
| 4      | 4.855A  | 1.983A | 1.992A | 0.790A | 79.957           | 85.292%    | 864                | 22.1                 | 0.975       |
|        | 12.226V | 5.044V | 3.312V | 5.064V | 93.745           |            |                    |                      | 115.11V     |

### RIPPLE MEASUREMENTS 115V

| Test       | 12V     | 5V      | 3.3V    | 5VSB    | Pass/Fail |
|------------|---------|---------|---------|---------|-----------|
| 10% Load   | 7.00mV  | 5.70mV  | 5.30mV  | 8.90mV  | Pass      |
| 20% Load   | 8.30mV  | 6.00mV  | 5.20mV  | 9.10mV  | Pass      |
| 30% Load   | 8.80mV  | 5.80mV  | 5.30mV  | 10.30mV | Pass      |
| 40% Load   | 9.30mV  | 6.30mV  | 5.70mV  | 9.80mV  | Pass      |
| 50% Load   | 11.30mV | 6.90mV  | 6.60mV  | 10.70mV | Pass      |
| 60% Load   | 14.30mV | 7.00mV  | 6.70mV  | 21.60mV | Pass      |
| 70% Load   | 17.40mV | 6.90mV  | 6.00mV  | 13.80mV | Pass      |
| 80% Load   | 23.10mV | 8.60mV  | 12.80mV | 18.50mV | Pass      |
| 90% Load   | 26.60mV | 8.30mV  | 13.30mV | 17.80mV | Pass      |
| 100% Load  | 40.90mV | 9.30mV  | 14.30mV | 18.40mV | Pass      |
| 110% Load  | 52.70mV | 10.50mV | 15.60mV | 17.50mV | Pass      |
| Crossload1 | 9.10mV  | 7.60mV  | 15.60mV | 8.00mV  | Pass      |
| Crossload2 | 45.50mV | 7.80mV  | 7.30mV  | 12.40mV | Pass      |

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 9/15

**Anex**

XPG Pylon 550W (#2)


# 230V

All data and graphs included in this test report can be used by any individual on the following conditions:

- › It should be mentioned that the test results are provided by Cybenetics
- › The link to the original test results document should be provided in any case

**PAGE 10/15**


### EFFICIENCY GRAPH 230V

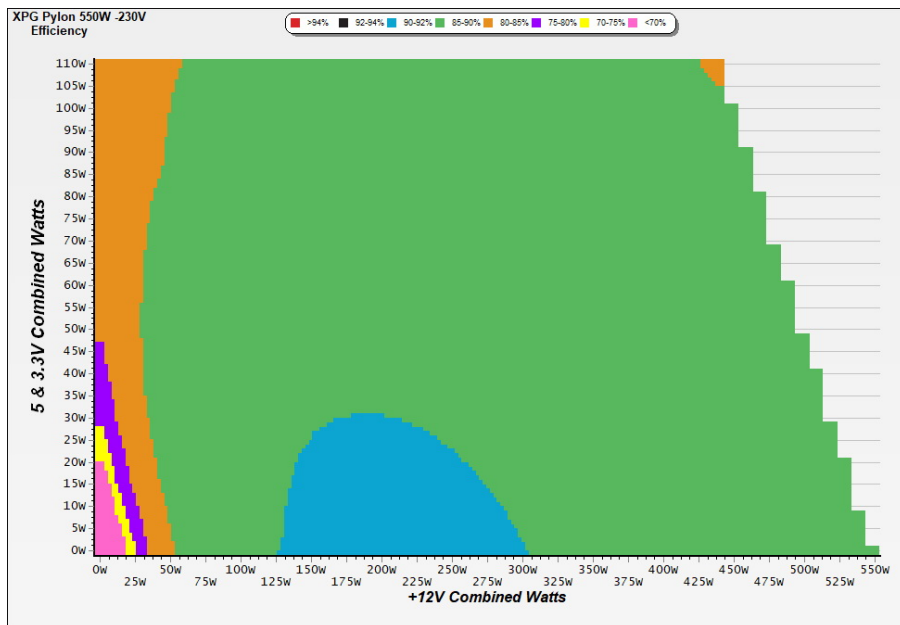

#### INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations

### NOISE GRAPH 230V

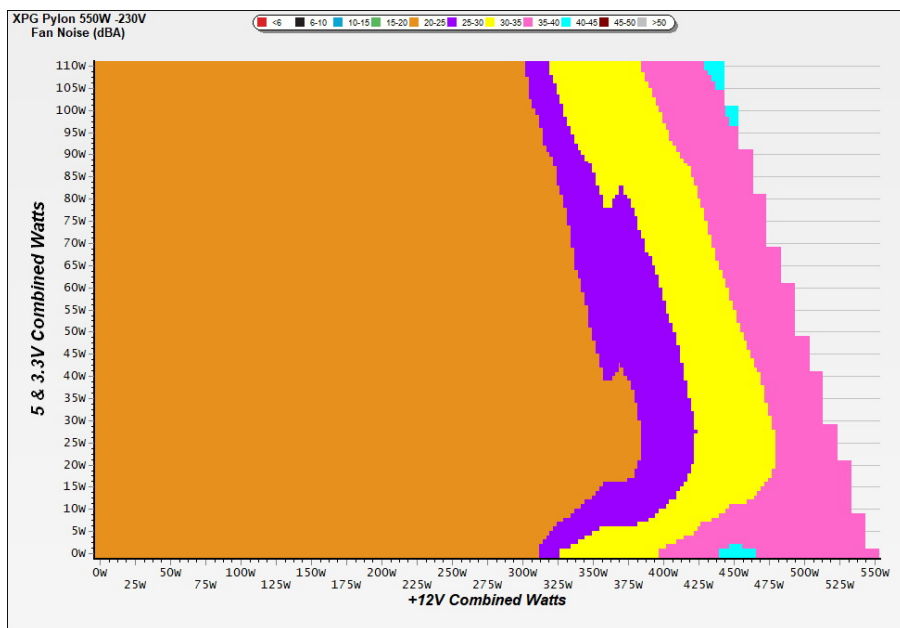

#### INFO

The PSU's noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails

All data and graphs included in this test report can be used by any individual on the following conditions:


- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

Anex

XPG Pylon 550W (#2)

## VAMPIRE POWER -230V

Power - 4K3680396225 - 15/01/2021 - 10:53

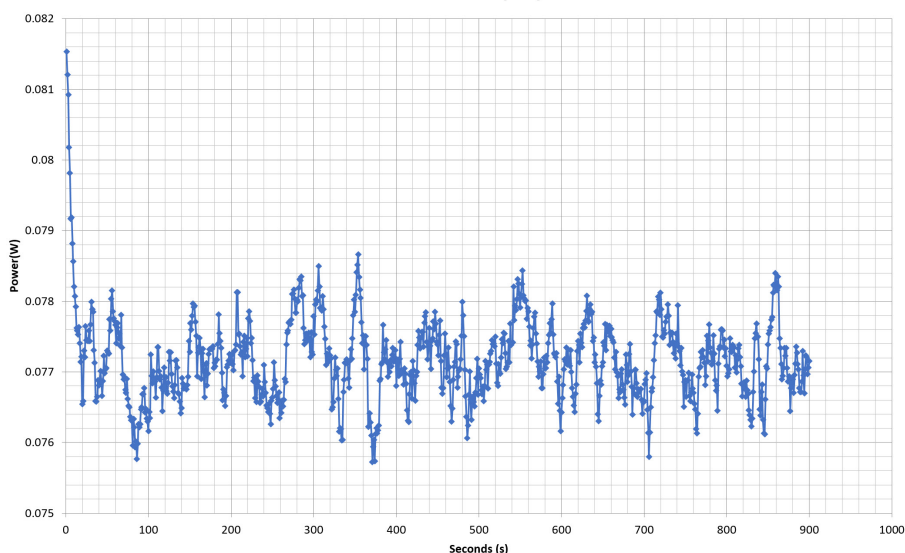

### INFO

*This graph is generated by the PPA Standby Power Analysis software which takes full control of the power analyzer during the whole procedure. This application features all of the EN50564 & IEC62301 test limits for standby power software testing*

All data and graphs included in this test report can be used by any individual on the following conditions:

- › It should be mentioned that the test results are provided by Cybenetics
- › The link to the original test results document should be provided in any case

PAGE 12/15

## Anex

XPG Pylon 550W (#2)

### 10-110% LOAD TESTS 230V

| Test # | 12V     | 5V      | 3.3V    | 5VSB   | DC/AC<br>(Watts) | Efficiency | Fan Speed<br>(RPM) | PSU Noise<br>(dB[A]) | Temps<br>(In/Out) | PF/AC<br>Volts |
|--------|---------|---------|---------|--------|------------------|------------|--------------------|----------------------|-------------------|----------------|
| 1      | 2.726A  | 1.983A  | 1.993A  | 0.988A | 54.952           | 83.660%    | 873                | 21.8                 | 35.81°C           | 0.835          |
|        | 12.231V | 5.046V  | 3.312V  | 5.063V | 65.685           |            |                    |                      | 40.53°C           | 230.20V        |
| 2      | 6.475A  | 2.976A  | 2.990A  | 1.188A | 110.011          | 88.096%    | 878                | 21.8                 | 36.09°C           | 0.926          |
|        | 12.217V | 5.044V  | 3.310V  | 5.049V | 124.876          |            |                    |                      | 41.76°C           | 230.16V        |
| 3      | 10.566A | 3.472A  | 3.494A  | 1.390A | 165.008          | 89.290%    | 881                | 22.0                 | 36.18°C           | 0.955          |
|        | 12.204V | 5.041V  | 3.307V  | 5.038V | 184.801          |            |                    |                      | 42.71°C           | 230.20V        |
| 4      | 14.666A | 3.970A  | 3.992A  | 1.592A | 220.009          | 89.549%    | 884                | 22.5                 | 37.29°C           | 0.968          |
|        | 12.192V | 5.039V  | 3.305V  | 5.027V | 245.686          |            |                    |                      | 44.62°C           | 230.23V        |
| 5      | 18.432A | 4.965A  | 4.997A  | 1.796A | 275.001          | 89.313%    | 889                | 23.1                 | 37.86°C           | 0.973          |
|        | 12.179V | 5.037V  | 3.303V  | 5.014V | 307.908          |            |                    |                      | 45.68°C           | 230.23V        |
| 6      | 22.210A | 5.959A  | 5.997A  | 2.000A | 329.993          | 88.837%    | 893                | 22.9                 | 37.95°C           | 0.978          |
|        | 12.165V | 5.036V  | 3.301V  | 5.001V | 371.461          |            |                    |                      | 46.17°C           | 230.20V        |
| 7      | 26.003A | 6.954A  | 7.004A  | 2.207A | 385.079          | 88.011%    | 1083               | 27.7                 | 38.17°C           | 0.983          |
|        | 12.151V | 5.035V  | 3.298V  | 4.986V | 437.536          |            |                    |                      | 47.41°C           | 230.21V        |
| 8      | 29.796A | 7.950A  | 8.010A  | 2.414A | 440.036          | 87.146%    | 1419               | 35.3                 | 39.06°C           | 0.986          |
|        | 12.137V | 5.032V  | 3.295V  | 4.973V | 504.940          |            |                    |                      | 49.49°C           | 230.20V        |
| 9      | 33.986A | 8.452A  | 8.502A  | 2.417A | 494.517          | 86.471%    | 1710               | 40.5                 | 39.36°C           | 0.988          |
|        | 12.123V | 5.029V  | 3.293V  | 4.966V | 571.887          |            |                    |                      | 50.37°C           | 230.31V        |
| 10     | 38.191A | 8.954A  | 9.023A  | 2.523A | 549.654          | 85.602%    | 2109               | 45.8                 | 39.86°C           | 0.989          |
|        | 12.109V | 5.026V  | 3.291V  | 4.955V | 642.101          |            |                    |                      | 51.70°C           | 230.31V        |
| 11     | 42.799A | 8.959A  | 9.029A  | 2.527A | 604.856          | 84.926%    | 2341               | 46.5                 | 40.27°C           | 0.990          |
|        | 12.095V | 5.023V  | 3.289V  | 4.949V | 712.212          |            |                    |                      | 53.20°C           | 230.31V        |
| CL1    | 0.116A  | 13.001A | 12.998A | 0.000A | 109.887          | 82.058%    | 907                | 22.8                 | 37.81°C           | 0.932          |
|        | 12.210V | 5.044V  | 3.300V  | 5.046V | 133.914          |            |                    |                      | 45.13°C           | 230.33V        |
| CL2    | 45.516A | 1.001A  | 0.999A  | 1.000A | 564.531          | 86.406%    | 2127               | 45.7                 | 40.08°C           | 0.989          |
|        | 12.110V | 5.030V  | 3.299V  | 5.001V | 653.350          |            |                    |                      | 51.70°C           | 230.31V        |

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 13/15

## Anex

XPG Pylon 550W (#2)

### 20-80W LOAD TESTS 230V

| Test # | 12V     | 5V     | 3.3V   | 5VSB   | DC/AC<br>(Watts) | Efficiency | Fan Speed<br>(RPM) | PSU Noise<br>(dB[A]) | PF/AC Volts |
|--------|---------|--------|--------|--------|------------------|------------|--------------------|----------------------|-------------|
| 1      | 1.212A  | 0.494A | 0.498A | 0.197A | 19.981           | 71.799%    | 867                | 21.9                 | 0.607       |
|        | 12.239V | 5.049V | 3.316V | 5.086V | 27.829           |            |                    |                      | 230.26V     |
| 2      | 2.425A  | 0.991A | 0.995A | 0.394A | 39.970           | 81.278%    | 871                | 21.8                 | 0.769       |
|        | 12.235V | 5.048V | 3.314V | 5.078V | 49.177           |            |                    |                      | 230.24V     |
| 3      | 3.642A  | 1.487A | 1.495A | 0.592A | 60.000           | 85.042%    | 872                | 21.8                 | 0.849       |
|        | 12.230V | 5.046V | 3.313V | 5.071V | 70.553           |            |                    |                      | 230.20V     |
| 4      | 4.855A  | 1.982A | 1.992A | 0.790A | 79.950           | 86.873%    | 873                | 21.8                 | 0.891       |
|        | 12.225V | 5.045V | 3.312V | 5.064V | 92.031           |            |                    |                      | 230.17V     |

### RIPPLE MEASUREMENTS 230V

| Test       | 12V     | 5V      | 3.3V    | 5VSB    | Pass/Fail |
|------------|---------|---------|---------|---------|-----------|
| 10% Load   | 7.20mV  | 5.30mV  | 5.20mV  | 8.40mV  | Pass      |
| 20% Load   | 8.20mV  | 5.50mV  | 5.40mV  | 8.40mV  | Pass      |
| 30% Load   | 8.70mV  | 5.90mV  | 5.20mV  | 11.10mV | Pass      |
| 40% Load   | 9.00mV  | 6.10mV  | 5.60mV  | 9.60mV  | Pass      |
| 50% Load   | 10.90mV | 6.40mV  | 6.00mV  | 10.90mV | Pass      |
| 60% Load   | 11.70mV | 7.00mV  | 6.50mV  | 19.70mV | Pass      |
| 70% Load   | 15.00mV | 6.50mV  | 6.00mV  | 13.00mV | Pass      |
| 80% Load   | 20.50mV | 7.30mV  | 12.60mV | 18.40mV | Pass      |
| 90% Load   | 25.40mV | 8.00mV  | 13.50mV | 19.50mV | Pass      |
| 100% Load  | 32.70mV | 8.90mV  | 14.90mV | 18.10mV | Pass      |
| 110% Load  | 49.20mV | 10.30mV | 15.60mV | 17.70mV | Pass      |
| Crossload1 | 9.20mV  | 8.40mV  | 14.70mV | 8.60mV  | Pass      |
| Crossload2 | 43.50mV | 7.50mV  | 7.20mV  | 11.70mV | Pass      |

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 14/15

# Anex

XPG Pylon 550W (#2)



Top side



Power specifications label

## CERTIFICATIONS 115V



## CERTIFICATIONS 230V



All data and graphs included in this test report can be used by any individual on the following conditions:

- It should be mentioned that the test results are provided by Cybenetics
- The link to the original test results document should be provided in any case