


# Delock Converter M.2 Key B+M male to 1 x internal USB 3.2 Gen 2 key A 20 pin female

## Description

This converter by Delock expands the system by one **USB 3.2 key A 20 pin** female port. Various cables can be connected to the converter, to provide either one USB Type-C™ or one USB Type-A interface.

**M.2**

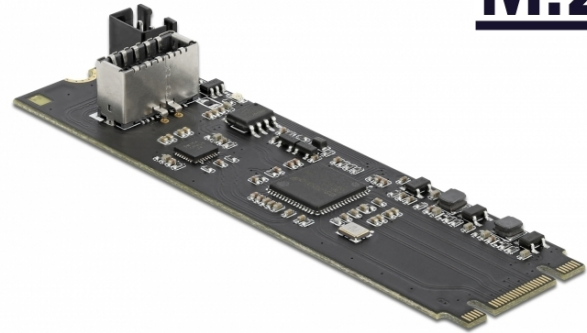

## Specification

- Connectors:
  - 1 x 59 pin M.2 key B+M male >
  - 1 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) key A 20 pin female
  - 1 x 2 pin power connector
- Chipset: Asmedia ASM3142
- Interface: PCIe
- Form factor: M.2 2280
- Suitable for M.2 slot with key M or B based on PCIe
- Bootable
- Data transfer rate up to 10 Gbps
- Supports eXtensible Host Controller Interface (xHCI) specification 1.1
- Electrical power per port: max. 15 watt (5 V / 3 A)
- LED indicator
- Dimensions (LxWxH): ca. 80 x 22 x 9 mm

## Item no. 63330

EAN: 4043619633302

Country of origin: China

Package: • Retail Box


## System requirements

- Linux Kernel 3.12 or above
- Windows 8.1/8.1-64/10/10-64
- A free M.2 key M or key B slot

## Package content

- Converter
- Power cable 2 pin to SATA, length ca. 30 cm
- Screws
- User manual

## Images



**General**

Form factor:	M.2 2280
Supported operating system:	Linux Kernel 3.12 or above Windows 10 32-bit Windows 10 64-bit Windows 8.1 32-bit Windows 8.1 64-bit

Slot:	PCIe
-------	------

**Interface**

Connector 1:	1 x 59 pin M.2 key B+M male
Connector 2:	1 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) key A 20 pin female
connector 3:	1 x 2 pin power connector

**Technical characteristics**

Chipset:	Asmedia ASM3142
Data transfer rate:	up to 10 Gbps