



Introduction

This USB 3.0 enclosure is for the use of 2.5" SATA I/II/III HDD/SSD, made by aluminum alloy material for superior heat dissipation and finished with sandblasted finish appearance.

This is one of the best storage solutions available.

Feature


- Driver free.
- Sandblasted finish appearance.
- Supports Plug & Play, hot swapping.
- LED indicators for power & HDD activity.
- Transfer rate: USB 3.0 up to 5Gbps, USB 2.0 up to 480Mbps.
- USB 3.0 HDD enclosure for 2.5" SATA I / II / III HDD/SSD use.
- Fits many types of HDDs, with height of 7mm, 9.5mm, 12.5mm and 14.5mm.

Specifications

Net Weight	109g	Safety Certification	CE
Interface	USB 3.0 / USB 2.0	Material	Aluminum & Plastic
Humidity	Operating: 10% - 90% Storage: 5% - 95%	Temperature	Operating: 0°C ~70°C Storage: -10°C ~75°C
LED	Power & Access(Blue)	Transfer rate	USB 3.0 : 5Gbps USB 2.0 : 480Mbps
Dimension	135(L) x 85.4(W) x 18(H) mm		
Power support	USB Power : 5V/1800mA (maximum)		
OS support	Windows XP/Vista/7/8, MAC OS 10.3.9+, Linux Kernel 2.6.31		

Installation

1. Open the enclosure. Remove the screws. (Figure A)

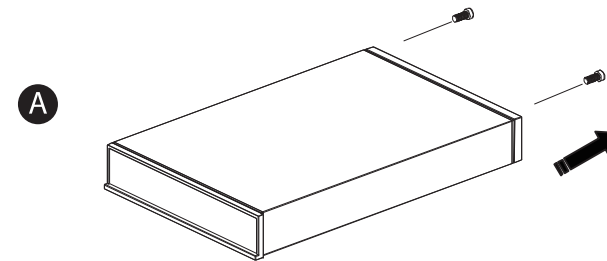

2. Pull out the HDD installation tray. (Figure B)

