


FGP-1000 Version: 1



10-Port Fast Ethernet PoE Switch, 1 x Gigabit RJ45, 1 x Gigabit SFP, 8 PoE Outputs

FGP-1000 is a 8-port 10/100Mbps Fast Ethernet Switch with Power over Ethernet (PoE) capability. With 8 dip switches, each PoE port can be manually set for On-Off control. FGP-1000 supports up to 30W on each LAN port when the DIP switch is in the ON position. Using a LevelOne PoE repeater, it is possible to extend the connection a further 100 meters, or even daisy-chain several PoE repeaters together for greater distances. Dual 10/100Mbps ports can connect with other edge switches or NVR as uplink ports.

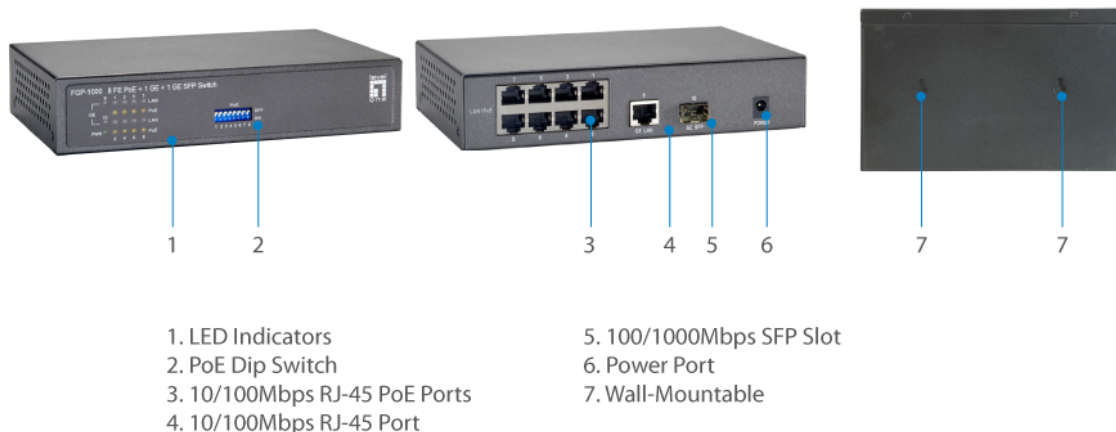

Key Features

- IEEE 802.3x Flow Control protects against lost packets for reliable data transmission
- 1000Mbps full-duplex, 10/100Mbps full/half-duplex, auto-negotiation, auto-MDI/MDIX
- PoE on/off control per port by dip switches
- Simple Plug and Play installation

Specifications

System Specifications

Standards & Protocols:

IEEE 802.3 10-BASE-T, Ethernet
 IEEE 802.3u 100-BASE-TX, Fast Ethernet
 IEEE 802.3ab 1000BASE-T, Gigabit Ethernet
 IEEE 802.3x Full-duplex Flow Control

Buffer Memory:

512KB

Connectors and Cabling:

8 x 10/100Base-TX RJ-45 PoE Ports

1 x 10/100/1000Base-T RJ-45 Port

1 x 100/1000Base-X SFP Slot

Button/Knob:

PoE Power On/Off Switch

Indicator:

Power, Active, 10/100/1000M, PoE

Transmission Method:

Store-and-Forward

Power Input:

56VDC

Power Consumption:

< 65W (FGP-1000W65)

< 90W (FGP-1000W90)

< 120W (FGP-1000)

Features

PoE:

Power Budget: MaX. 57W (FGP-1000W65)

Max. 82W (FGP-1000W90)

Max. 115W (FGP-1000)

Power Output: 52V DC, up to 30W per port

Protection: PoE over current & PoE circuit sorting protection,

Pin Assignment: 4/5(+), 7/8(-)

Performance

Backplane (Gbps):

5.6Gbps

MAC Address Table:

4K

Data Transfer Rate:

10/100/1000Mbps

Packet Forwarding Rate:

1000Mbps port - 1,488,000pps

100Mbps port - 148,000pps

10Mbps port - 14,880pps

Environment

Temperature (°C):

Operating: 0°C ~ 45°C

Storage: - 40°C ~ 70°C

Humidity (Non-condensing):

Storage: 10% ~ 90%

Operating: 10% ~ 90%

Deployment:

Desktop

Physical Specifications

Dimensions (W x D x H mm):

188 x 118 x 38 mm

Weight (g):


1200g

Approval and Compliance

EMI/EMS:

FCC, CE, RoHS

Diagram

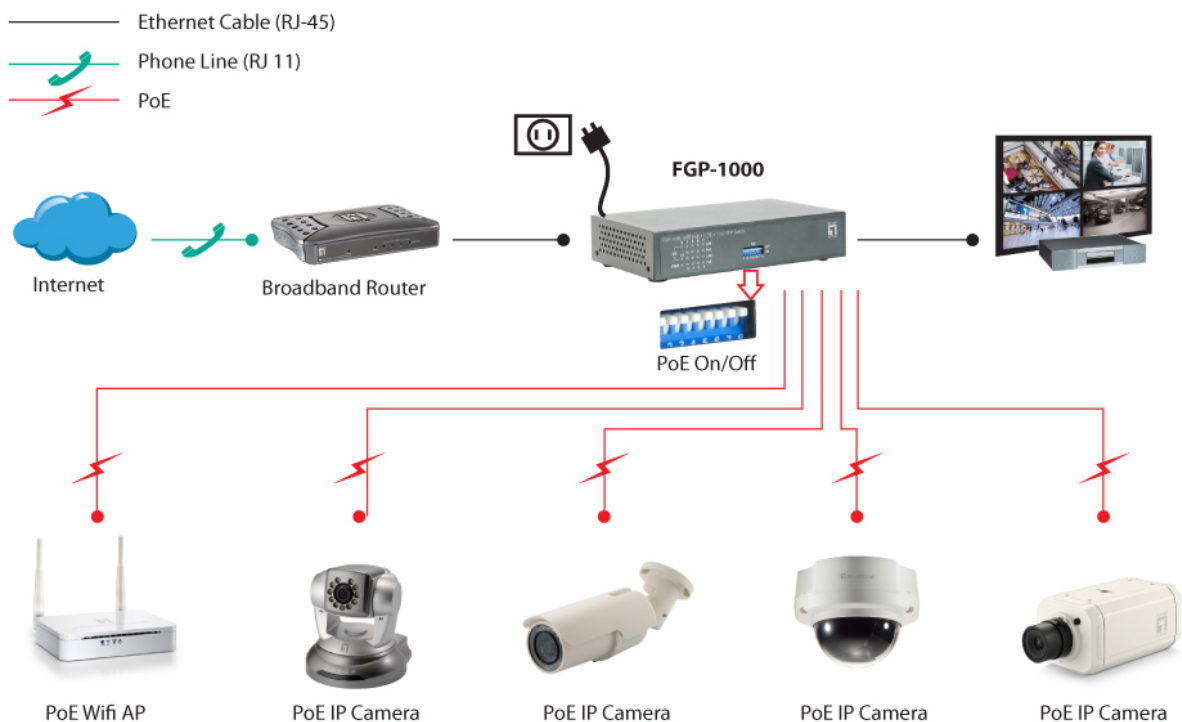

Order Information

FGP-1000: 120W

FGP-1000W90: 90W

FGP-1000W65: 65W

Package Contents

FGP-1000

Power Adapter

User Manual

No liability or responsibility for any errors or omissions in the content.
Specifications are subject to change without notice.
All mentioned brand names are registered trademarks and property of their owners.
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.