



Color Variants

VG425211
Stainless steel
Width 38 cm

Installation Accessories

- VA420000
Connection strip for combination with other Vario appliances of the 400 series for flush installation
- VA420001
Connection strip for combination with other Vario appliances of the 400 series for flush installation with appliance cover/adjustment strip
- VA420010
Connection strip for combination with other Vario appliances of the 400 series for surface installation
- VA420011
Connection strip for combination with other Vario appliances of the 400 series for surface installation with appliance cover/adjustment strip
- VA440010
Stainless steel appliance cover with mounting strip
- VA450400
Stainless steel adjustment strip 38 cm

VG425211
Vario gas cooktop 400 series
Stainless steel
Width 38 cm
Natural gas 20 mbar

Multi-ring burner with up to 4 kW
Full electronic power level regulation on 12 levels
Precise and reproducible flame size
Automatic fast ignition, electronic flame monitoring with automatic re-ignition
Simmer function for cooking on a very low output level
Solid stainless steel control knob
Precision crafting of 3 mm stainless steel
For surface installation with a visible edge or for flush installation
Can be combined perfectly with other Vario appliances of the 400 series

Cooking zones

- 1 two-ring high output burner (165 W – 4000 W), suitable for pots up to max. ø 28 cm.
- 1 two-ring standard output burner (165 W – 2000 W), suitable for pots up to max. ø 28 cm.

Handling

Control knobs with illuminated ring, cooking zone and output level markings.
One-handed operation.
Full electronic control in 12 output levels for exact power level adjustment plus simmer function.
Automatic fast ignition.

Features

Simmer function.
Cast pan support with flat, continuous pot surface.
Brass burner rings.

Safety

Electronic flame monitoring with automatic re-ignition.
Residual heat indication.
Safety shut-off.

Planning notes

Depending on the type of installation (surface-mounted or flush-mounted, with or without an appliance cover), the specific location of the cut-out and the knob positions may vary.
The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).
If installing with the appliance cover VA 440 or adjustment strip VA 450 take into account the additional space required for the depth.
If combining several appliances with at least one appliance cover, the adjustment strip VA 450 is required to compensate for the depth of the appliance without the appliance cover.
If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided.
In the cut-out, the installation system requires the side edge to be at least 10 mm for surface installation and at least 13 mm for flush installation. Ensure a continuous cut surface of 90°.
The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.

Characteristics
Product name/family
Vario/Domino gas hob
Built-in / Free-standing
CONSTR_TYPE.Built-in
Energy input
Gas
Total number of positions that can be used at the same time
2
Required niche size for installation (HxWxD)
131 x 360 x 492
Width of the product (mm)
380
Dimensions of the product (mm)
131 x 380 x 520
Dimensions of the packed product (HxWxD) (mm)
290 x 500 x 600
Net weight (kg)
14.0
Gross weight (kg)
16.0
Residual heat indicator
Separate
Location of control panel
External control
Basic surface material
brushed stainless steel
Color of surface
Stainless steel, Stainless steel
Color of frame
Stainless steel, Stainless steel
Approval certificates
CE, Eurasian, Ukraine, VDE
Length of electrical supply cord (cm)
140
EAN code
4242006261474


Consumption and connection features
Electrical connection rating (W)
15
Gas connection rating (W)
6000
Current (A)
2
Voltage (V)
220-240
Frequency (Hz)
60; 50

created on 2018-02-21
Page 1


Additional instructions for flush installation:
Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.
The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.
The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.
If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.
Special nozzles can be ordered as spare parts.
Plan for an electrical connection (the appliance is not operable without power supply).
Air intake from above.
No intermediate shelf required.
Rear panel and wall trims must be heat-resistant and consist of a non-flammable material.
A minimum clearance of at least 150 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.
If operated next to the downdraft ventilation VL 414, the air baffle AA 414 is recommended to ensure maximum performance of the cooktop.
With a total connected load of more than 12 kW local regulations concerning room ventilation, room size and combination of extraction or recirculation hoods must be observed.
Minimum clearance between gas cooktop(s) with more than 12 kW and ventilation hood 70 cm.
Appliance can be snapped into the worktop from above.
Appliance weight: approx. 14 kg.

Connection
Total connected load gas 6.0 kW.
Total connected load electric 15.0 W.
Connecting cable 1.4 m with plug.


Installation with appliance cover/spacer batten;
installation standing proud of surrounding surfaces

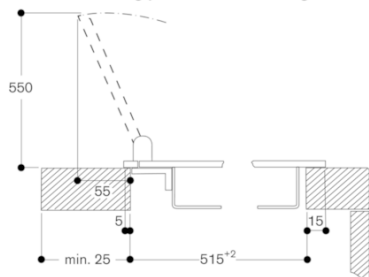

Installation with appliance cover/spacer batten;
installation flush with surrounding surfaces

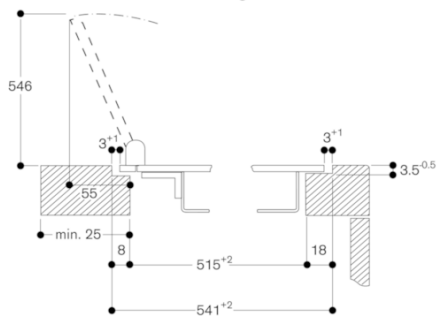


View from above




* with appliance cover or filler strip
(observe the front and rear asymmetrical support,
see separate notes "Installation with appliance
cover/filler strip").

Cross-section

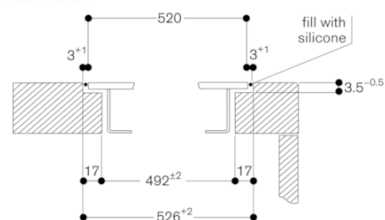


When installing with appliance cover or filler strip, pay attention to the deeper cut-out and the front and rear groove width.



Longitudinal section

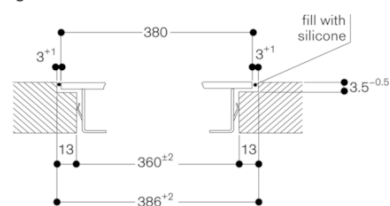


Installation of the control knob; flush installation

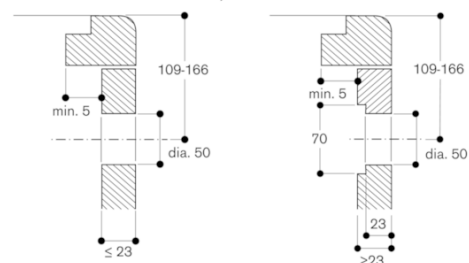

Installation of the control knob; surface mounting

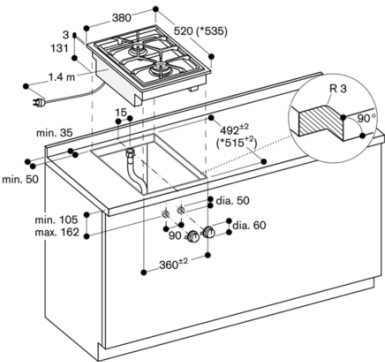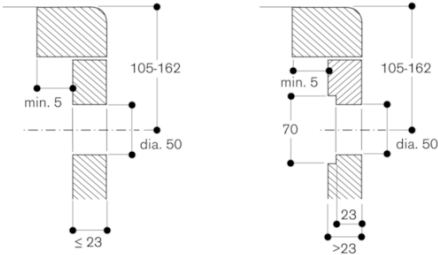

* with appliance cover or filler strip
For further installation options, see the installation instructions.

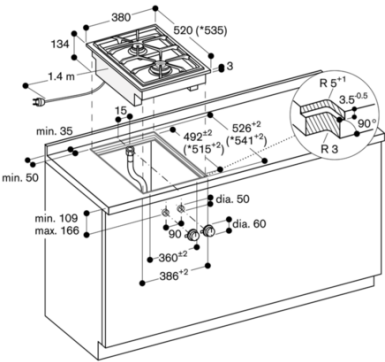

* with appliance cover or filler strip
For further installation options, see the installation instructions.