



Overview

Insert a certified USB-C cable into the charger's USB-C port to charge your device. The maximum output power is 45W.


Touch here to control the screen.

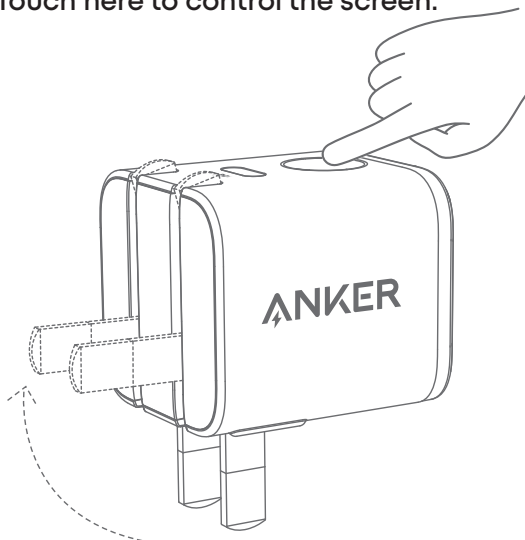

The charger's plug can rotate 180° up and down to suit various scenarios and needs:


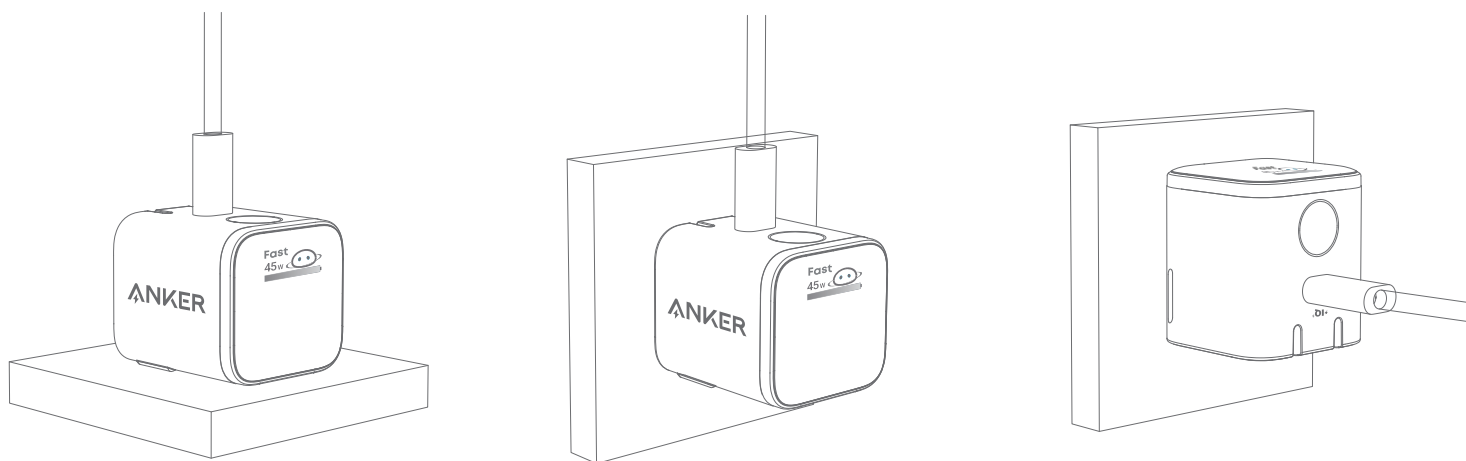


Note: Before inserting the plug into a socket, make sure the plug is locked in place and inserted vertically.


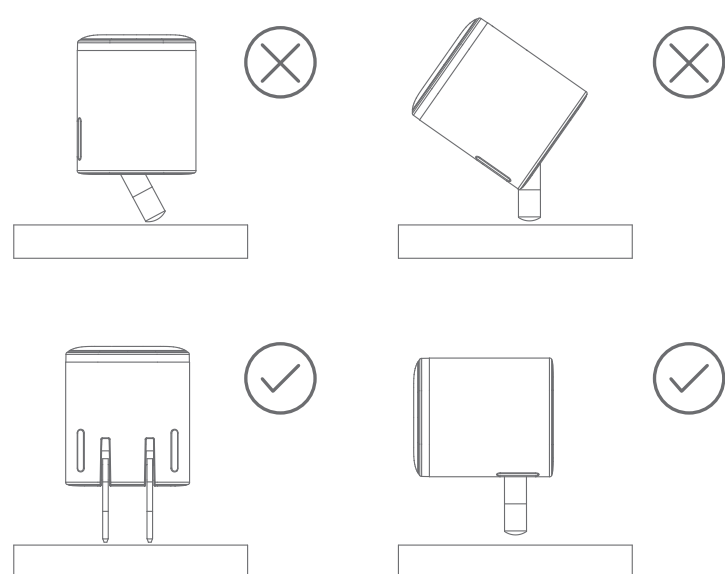


Touch Guide

Illustrations are for reference only. Please refer to the actual display page.

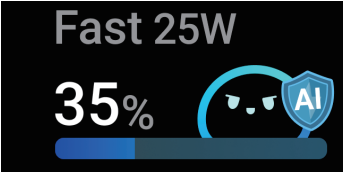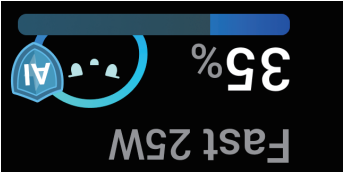
Working Status		
1	After the charger is connected and detects a device, it will automatically enter the charging page:	
2	Tap once to view temperature control:	
3	Press and hold for 2 seconds to rotate the screen:	
4	The screen will automatically turn off if there is no interaction for one minute:	

Idle Status

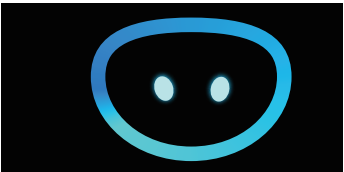1	Idle Status:	
2	Tap once to interact with IP:	
3	Press and hold for 2 seconds to rotate the screen:	
4	The screen will automatically turn off if there is no interaction for one minute:	

Screen Switching Overview


Illustrations are for reference only. Please refer to the actual display page.

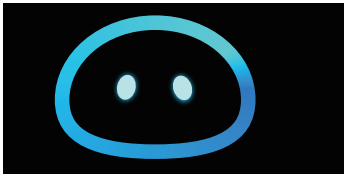

↓ Connect the device




↓ Automatically jumps to the charging progress page after 3 seconds

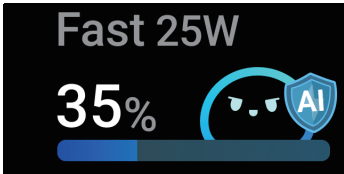

↓ Tap once to view Smart Temperature Control mode




↓ Tap once to enter the mode switching page

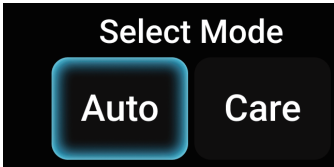


Charging Mode Switching


Illustrations are for reference only. Please refer to the actual display page.

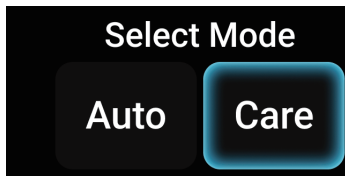

↓ Tap twice to select mode

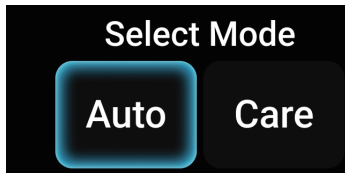

↓ The screen will flash three times to confirm the current selection

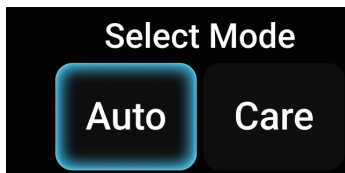

Note:

- Auto Mode:
Automatically adjusts the charging power based on the phone's battery level.
0-20%: Fast charging
20%-80%: Steady charging
80%-100%: Trickle charging
- Care Mode:
Maintains Gentle charging to protect the battery.

Smart Temperature Control

Illustrations are for reference only. Please refer to the actual display page.



Specifications

Input	100-240V~, 50/60Hz 1.5A Max
Output	5V ≡ 3A / 9V ≡ 3A / 15V ≡ 3A / 20V ≡ 2.25A (45W Max)

Note:
Auto Mode: 45W Max
Care Mode: 20W Max