

ASUS Chromebox 6a



Experience excellent performance and responsiveness with advanced features for best-in-class productivity



14th Gen Intel Processors



PCIe 4.0x4 M.2 SSD



USB Type C



2.5G Ethernet



4 Displays

Performance for any workplace

- Up to the latest 14th Gen Intel® Core™ 7 processors (15W)
- Integrated Intel® UHD Graphics
- Supports M.2 2280 PCIe Gen4x4 NVMe SSD

Built for efficiency

- Ultra-fast Wi-Fi 7 wireless network and 2.5G wired network (2.5G Ethernet, 10/100/1000/2500 Mbps)
- ENERGY STAR 9.0 certified
- MIL-STD-810H durability


Simplified IT management

- Always up to date operating system
- Centralized cloud management via Google Admin console
- Secure by design with multilayered defense
- Supports zero-touch enrollment

ASUS Chromebox 6a



Overview:

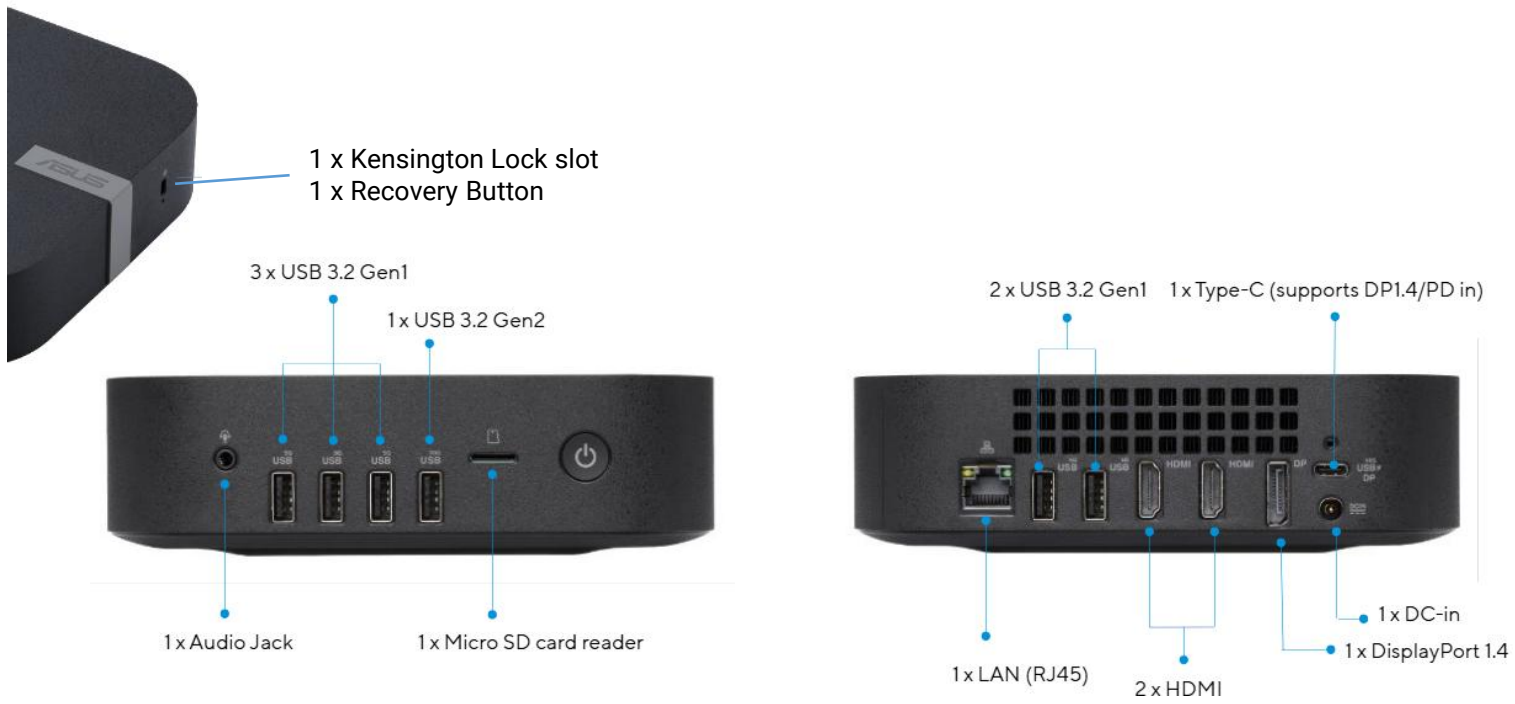

Accessories list:



- Power Cord
- AC Adapter (80cm)
- Quick Start Guide & Warranty Card
- VESA Mount Kit (Optional)
- Keyboard & Mouse for Chrome OS (Optional)

Feature table:

Power	Security	Reliability	Power
PD input	Kensington lock	24/7 Durability Test	AC Power loss

ASUS Chromebox 6a



Model		ASUS Chromebox 6a
OS		ChromeOS / ChromeOS Enterprise Upgrade
CPU		Intel® Core™ 7-150U Processor Intel® Core™ 5-120U Processor Intel® Core™ 3-100U Processor (TDP 15W)
Chipset		Integrated
Graphics		Intel® UHD Graphics
Memory		2 x SO-DIMM DDR5 5200 memory 8GB~ 32GB
Storage		1 x M.2 2280 PCIe Gen4x4 NVMe SSD (128G/256G/512G)
Wireless Network		Intel® Wi-Fi 7 BE200, 2x2, and Bluetooth® 5.4* (* Bluetooth version depends on OS support)
LAN		2.5G Ethernet, 10/100/1000/2500 Mbps
Connectivity	Front I/O	1 x USB 3.2 Gen2 Type A / 3 x USB 3.2 Gen1 Type A / 1 x Audio Jack (Mic / Headphone Jack) / 1 x Micro SD card slot
	Side I/O	1 x Kensington Lock / 1 x Recovery Button
	Rear I/O	2 x USB 3.2 Gen1 Type-A / 1 x USB 3.2 Gen2 Type-C (supports DP1.4/PD in) 2 x HDMI / 1 x DisplayPort 1.4 / 1 x RJ45 LAN Port / 1 x DC-in
Power Supply		90W Power Adapter
Dimensions (W x D x H)		166.5 x 165.8 x 45.9 mm (6.56 x 6.53 x 1.81 inch)
Weight		0.8 kg (1.76 lb)
Temperature	Operating	0°C~50°C
	Storage	-40°C~85°C
Humidity		0%~95% Relative Humidity
Acoustic	Idle mode	<25 dBA
	Full loading	<45 dBA * Test results will vary slightly depending on the HDD/SSD SKU selected by customer
Certificates		BSMI/CB/CE/FCC/UL/Energy Star/C-Tick/Wi-Fi/RF/VCCI