LINO10

Column speaker 10 x 2"

Highlights:

- 10 mm distance to wall
- Slimline aluminum design
- 10 x 2" high-quality broadband speakers
- Multi-tapping 70V / 100V line transformer
- Finely perforated front grill
- Multi-functional L-shaped wall bracket
- 2° vertical incline angle

The LINO series are column speaker series designed for a wide variation of general-purpose applications in acoustic difficult environments, ranging from speech and announcement applications to background music systems. Typical applications are houses of worship, auditoria, presentation rooms, public transportation hubs, … and many more. They are solid constructed using solid aluminum materials and finished through a rigid finely perforated front grill.

The LINO10 column speaker consists of 10 x 2" low/mid-frequency drives with a 1" central positioned tweeter for the high frequencies. It reaches a power handling of 40 Watt, while a multi-tapping line transformer allows it to be connected in 70V/100V public address systems with power taps for 40W, 20W and 10W (5 W for 70V use only). It offers solutions for uniform acoustic performance in any type of system in reverberant venues, while reducing echo and microphone feedback to optimizes the intelligibility of music & speech.

Mounting is done through an L-shaped bracket on top and bottom, offering optimal flexibility for fixation and directional placement. The distance from the speaker to the wall is 10mm, while it can be vertically inclined 2°. Connections are made through multi-tapping terminal block connector and A multi-tapping line transformer allows them to be connected to 70/100V public address systems with various power tapping settings, while connections in low impedance systems are also possible.

*Given dispersion values are the average beamwidth within the 1 kHz – 4 kHz frequency range (-6 dB - 1/3 oct) , which are critical for the speech intelligibility in the main application field of these loudspeakers.












Voltage:



Applications:

- Education
- Public facilities
- Corporate spaces
- Houses of worship

We reserve the right to change specifications without notice, this is part of our policy to continually improve our products.

System specifications:

RMS/AES power handling		40 W
Program power handling		80 W
Impedance		20 Ω
Sensitivity (1W/1m)		90 dB
Sound Pressure (Max. W/1m)		107 dB
Frequency	Range (-10 dB)	120 Hz - 20 kHz
	Response (± 3 dB)	170 Hz - 15 kHz
Line Transformer Tappings	1	125 Ω - 100 V / Not used - 70 V / 40 W
	2	250 Ω - 100 V / 40 W - 70 V / 20 W
	3	500 Ω - 100 V / 20 W - 70 V / 10 W
	4	1000 Ω - 100 V / 10 W - 70 V / 5 W
Drivers		10 x 2"
	HF	1"
Connectors		6-pin Euro Terminal Block
Temperature	Operating	-20 - 50 °C
Dispersion	Horizontal	160° (-6 dB avg 1 kHz - 4 kHz)
	Vertical	15° (-6 dB avg 1 kHz - 4 kHz)
Ingress Protection rating		IP3x

Product Features:

Colours		Black & White
Construction		Aluminum
Front finish		Aluminium grill
Dimensions		72 x 796 x 68.3 mm (W x H x D)
Weight		3.7 kg
Accessories	Included	1 x 6-pin Euro Terminal Block Input connectors
		Mounting bracket

Variants:

- LINO10/B - Black version
- LINO10/W - White version

We reserve the right to change specifications without notice, this is part of our policy to continually improve our products.

Architects' and Engineers' Specifications:

The loudspeaker must be a surface-mount column type, consisting of 10 x 2" low/mid-frequency drivers with a 1" central positioned tweeter for the high frequencies, which are fitted inside a slim enclosure.

It shall be fitted with a multi-tapping line transformer allowing the speaker for being used in 70/100V public address systems or standard low impedance (20Ω) audio systems. It must have an RMS power handling of 40 Watt with a maximum power handling of 80 Watt and the frequency response (±3 dB) should range from 170 Hz to 15 kHz. The sensitivity must reach 90 dB when measured with an input signal of 1 Watt at a distance of 1 meter, while a maximum continuous sound pressure level of 107 dB should be reached. The nominal dispersion shall be a 160° horizontal and 15° vertical coverage pattern (-6 dB avg 1 kHz - 4 kHz).


The line transformer power taps shall be selectable through a multi-tapping 6-pin terminal block connector on its rear and adjustable in steps of 40W, 20W and 10W for 70/100V (a 5W tapping is available for 70V use).

The speakers' enclosure shall be constructed of high-quality aluminum with a fine perforated aluminum front grill. It shall come available in both white (RAL9003) and black (RAL9005) colors. Optimal directional placement shall be possible through an L-shaped bracket on top and bottom. The speakers' enclosure shall be 796 mm high, 72 mm wide and 68.3 mm deep and the weight shall not exceed 3.7 Kg.


We reserve the right to change specifications without notice, this is part of our policy to continually improve our products.

Acoustical data graphs:


Horizontal Polars:

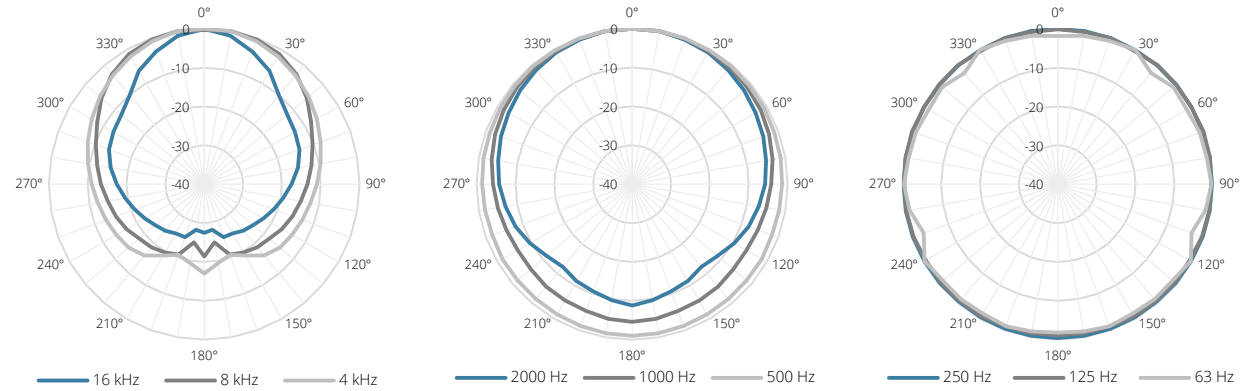


Vertical Polars:

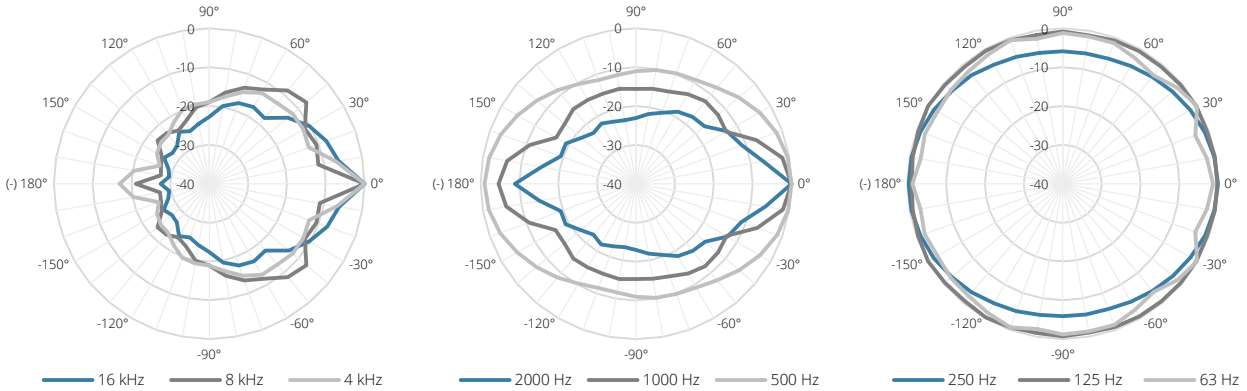


Sensitivity:

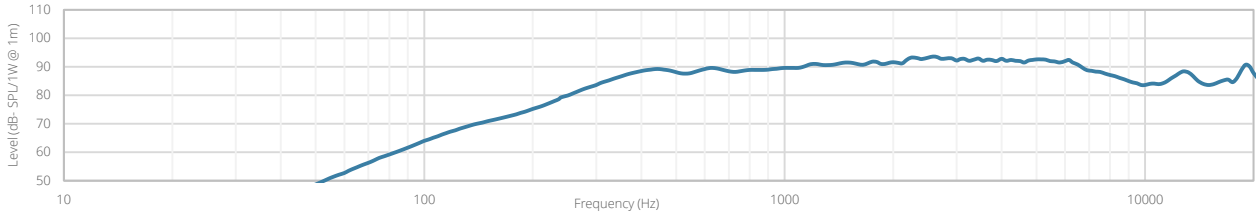


Beamwidth (-3dB):

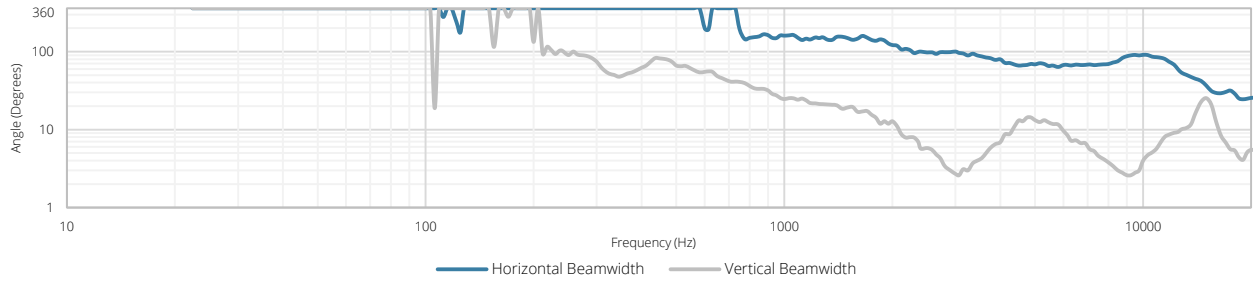

Directivity index:

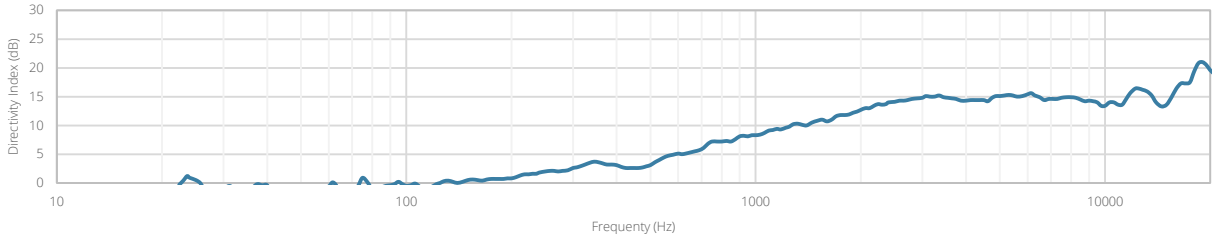

We reserve the right to change specifications without notice, this is part of our policy to continually improve our products.

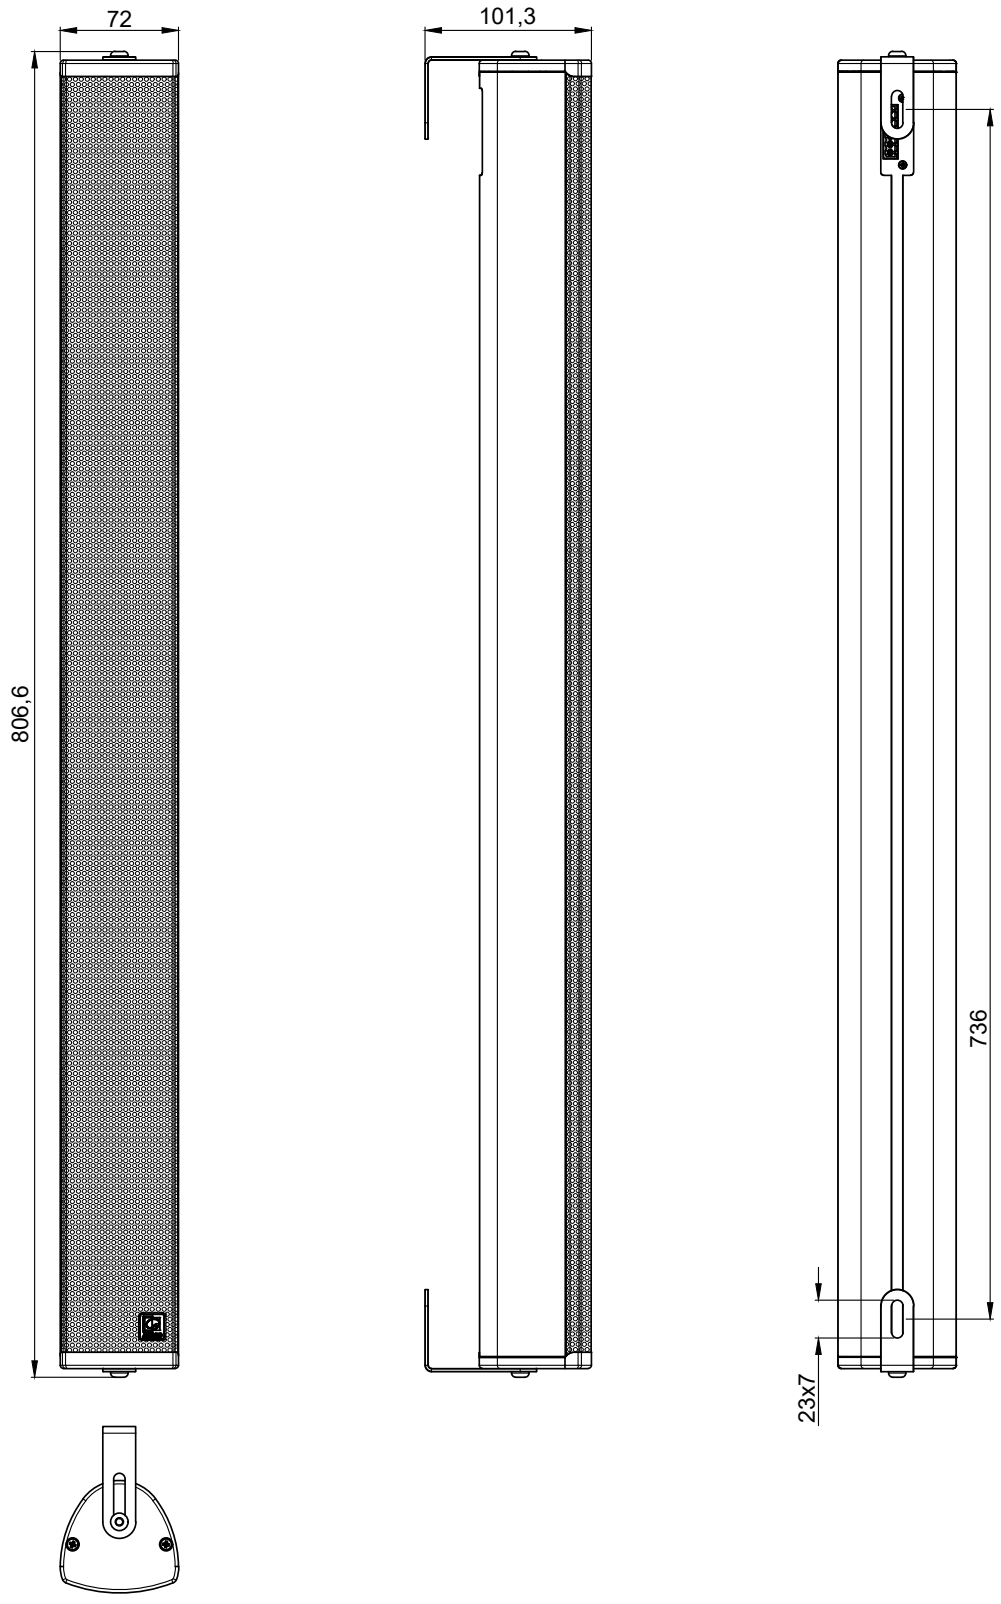

AUDAC	**LINO10**	**Product description:** SLIM COLUMN SPEAKER 40 W - 70V/100V
	Weight: TBA	**Outer dimensions:** (w x h x d) 72 x 806,6 x 101,3
		Unit height: N/A

We reserve the right to change specifications without notice, this is part of our policy to continually improve our products.