
Product information

WISI DD 09 M 0650

Multimedia wall outlet sockets, terminal socket

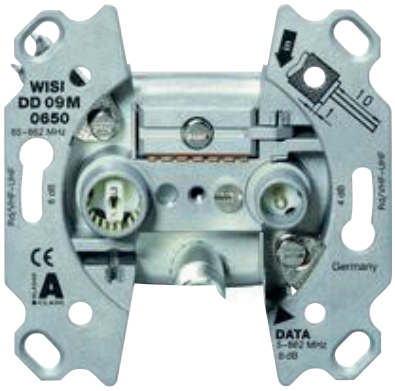

KLASSE A CLASS

Description

TV connection with IEC technology. Multimedia with F-connector or WICLIC for cable modem. HF output high-pass filtered. Cover plate and connector cable see accessories

At a glance:

- Vodafone KDG certfied

WISI Communications GmbH & Co. KG
Wilhelm-Sihn-Str. 5-7
75223 Niefern-Oeschelbronn, Germany
Phone: +49 7233 66-280, Fax: -350
E-Mail: export@wisi.de

Technical Modifications reserved. WISI cannot be held liable for any printing error. 4. September 2017, 4:00 nachm.

WISI DD 09 M 0650

Technical data	
Inputs	
Frequency range	5...1006 MHz
Outputs	
Frequency range TV	85...1006 MHz
Frequency range FM	87...1006 MHz
Frequency range DATA	5...1006 MHz
Rejection loss TV	≥40 dB 5...65 MHz
Rejection loss FM	≥40 dB 5...65 MHz
Insertion loss TV	9 dB
Insertion loss FM	10 dB
Insertion loss DATA	9 dB
Isolation DATA - TV	≥60 dB (5...65 MHz)
Isolation DATA - TV	≥35 dB (85...1006 MHz)
Isolation DATA - FM	≥70 dB (5...65 MHz)
Isolation DATA - FM	≥45 dB (85...1006 MHz)
Return loss IN, OUT	≥18 dB (-1.5 dB/oct.)
Return loss TV	≥14 dB (-1.5 dB/oct.)
Return loss FM	≥14 dB (-1.5 dB/oct.)
Return loss DATA	≥18 dB (-1.5 dB/oct.)
Intermodulation ratio	> 120 dBµV (EN60728-4)
Connectors	
Outer conductor clamp	7.5 mm
Inner conductor clamp	0,6...1,3 mm
F-socket	1 pcs. EN60169-24
IEC socket	1 pcs. EN60169-2
IEC-plug	1 pcs. EN60169-2
General data	
Screening factor	>85 dB (class A)
Dimensions (width x height x depth)	70 x 70 x 22 mm
Installation depth	35 mm

Packaging data	
Sales unit	10 pcs.
Dimensions (WxHxD) sales unit	212 x 148 x 78 mm
Packaging volume sales unit	dm³
Gross weight sales unit	0.110 kg
Shipping unit	100 pcs.
Dimensions (WxHxD) shipping unit	mm
Packaging volume shipping package	0.22 dm³
Gross weight shipping unit	0.11 kg
EAN	4010056183882
Article number	18388
Customs tariff number	85291095