# Equip Basic Flex 19" Freistehender Serverschrank, 32HE, 800x800mm, mit Glastür, herausnehmbare und abschließbare Paneele, montiert, RAL7035 Grau


## Product Images










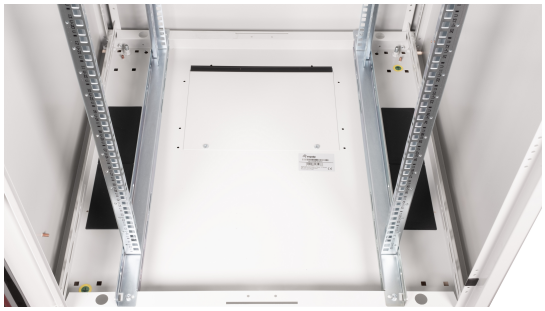





equip

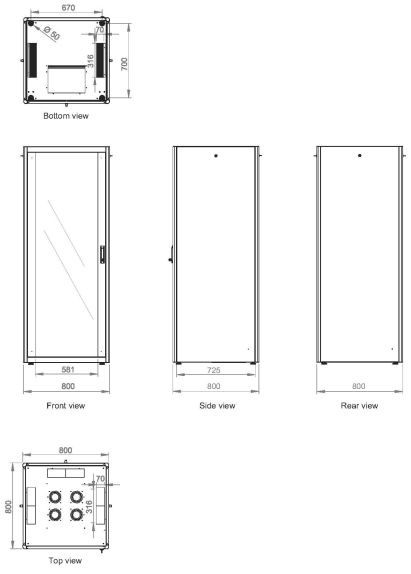


670
Ø 450
70
316
700
Bottom view
581
800
Front view
725
800
Side view
800
Rear view
800
800
70
316
Top view

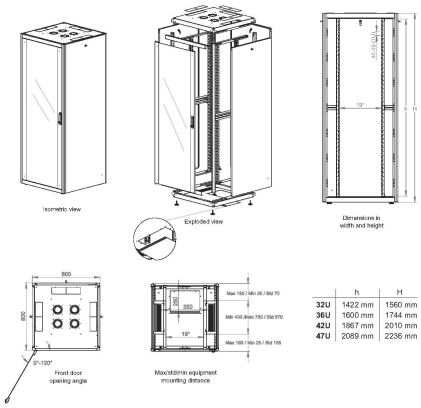
Isometric view
Exploded view
Dimensions in width and height
800
800
0°-120°
Front door opening angle
Max/std/min equipment mounting distance
h
H
32U 1422 mm 1560 mm
36U 1600 mm 1744 mm
42U 1867 mm 2010 mm
47U 2089 mm 2236 mm

## Short Description

- 32U cabinet, designed for optimal performance in every space
- 800X800MM Server Cabinet
- Ships preassembled for easy setup at your location
- The cabinet comes with a tempered glass frontdoor to provide unmatched strength while maintaining clear visibility
- Sidepanels are removable and lockable
- Backpanel is removable and lockable

## Description

These cabinets, of the Basic Flex Line, are engineered for the efficient and user-friendly installation of both active and passive network components, prioritizing streamlined cable management. Crafted from steel sheets up to 1.5 mm thick, every cabinet guarantees excellent stability, attributed to a unique plate curving technique, forming a sturdy steel framework. They are finished with a powder coating in shades of grey (RAL 7035) and black (RAL 9005). For challenging set-up locations that are less accessible, the cabinet is designed to be disassembled. The doors are easily detachable, and their stops can be switched between right and left orientations. Additionally, the roof is prepped for the integration of an air ventilation unit. Inside, each cabinet houses two sets (4 pieces) of 483 mm (19") profile rails. These rails, galvanized and marked with height units readable from both directions, are adjustable in depth. To facilitate extensive equipment installations, they're paired with supplementary depth support bars. Cable management is central to the design. The cabinet base features a punched-out cable entry shielded with a metal plate. For the broader 800 mm width cabinets, there are added punched-out cable entries covered with plastic on both sides. These entries are replicated on the roof, with a single one for 600 mm width cabinets and three for the 800 mm width ones. To cater to diverse operational needs, a wide assortment of accessories, including cable management tools and shelves, is readily available.

## Additional Information

| | |
|---|---|
| Wandmontage möglich | Nein |
| Anzahl der Kartons pro Palette | 1 piece |
| Bruttogewicht der Palette | 13500 gram |
| Bruttovolumen der Paletten | 116160 cubic_centimeter |
| Volumen der Verpackung | 65824000 cubic_centimeter |
| Maximale Anzahl von Stapelkartons | 1 piece |
| Länge der Palette | 880 millimeter |
| Breite der Palette | 880 millimeter |
| Höhe der Palette | 150 millimeter |
| Handbuch | Ja |
| Montagesatz | Nein |
| Maximale Gewichtskapazität | 600 kilogram |
| Schlüsselsperrung | Ja |
| Material des Gehäuses | Steel |
| Eingebaute USV | Nein |
| Rack-Schienen | Ja |
| Typ des Rahmens | Closed |
| Einstellung der Füße | 30 millimeter |
| Montage erforderlich | Nein |
| Schalldicht | Nein |
| Lenkrollen | Nein |
| Schrank Typ | Freestanding rack |
| Höheneinheit | 32U |
| Abnehmbare Hintertür | Ja |
| Abnehmbare Vordertür | Ja |
| Maximale Gewichtskapazität auf Rollen | 600 kilogram |

| | |
|---|---|
| Konstruktion der Hintertür | Steel |
| Konstruktion der Vordertür | Tempered glass |
| Konstruktion der Seitenwände | Steel |
| Schloss für die Seitenwände | Ja |
| Schloss für die Hintertür | Ja |
| Schloss für die Vordertür | Ja |
| Inklusive Seitenteile | Ja |
| Dicke der Rack-Schiene | 1.5 millimeter |
| Stabilisierungsfußschraube | Ja |
| Anzahl der Stabilisierungsfußschrauben | 4 piece |
| Verstellbarer Ständer | Nein |
| Überwachung | Nein |
| Haupt-PDU | Nein |
| Produktdesign | 4-Post |
| Art der Kühlung | Passive |
| Öffnungswinkel der Tür | 120 degree |
| Abnehmbare Seitenteile | Ja |
| Anzahl der Lagen pro Palette | 1 piece |
| Bruttogewicht der Palette | 95000 gram |
| Code des Harmonisierten Systems (HS) | 853710 |
| Zolltariflicher Warencode (TARIC) | 8537109899 |
| Kohlenstoff-Fußabdruck | 13.167 kilogram |
| Menge pro Palette | 1 piece |
| Einhaltung der Nachhaltigkeit | Ja |
| Schrauben inklusive | Nein |
| Wandmontagesatz | Nein |
| Temperatursensor | Nein |

| | |
|---|---|
| Sockelplatte | Nein |
| Muttern inklusive | Nein |
| Erdungsset | Ja |
| Menge pro Packung | 1 piece |
| Tiefe des Pakets | 880 millimeter |
| Höhe des Pakets | 1700 millimeter |
| Breite des Pakets | 880 millimeter |
| Kurzanleitung zur Installation | Nein |
| Gewicht der Verpackung | 4500 gram |
| Einstellbare Füße | Ja |
| Einstellbare Tiefe | Nein |
| Kabelmanagement | Nein |
| Vormontiert | Ja |
| Inhalt des Pakets | Erdungssatz |
| Farbe | Light Grey |
| RAL Code | RAL7035 |
| Modellnummer | EBF-32-8080-G-BAAA |
| Rail to Rail Länge | 19 inch |
| Produkt Höhe | 1560 millimeter |
| Produkt Breite | 800 millimeter |
| Produkt Tiefe | 800 millimeter |
| Dicke des Materials | 83.5 millimeter |
| Innere Höhe | 1422 millimeter |
| Innere Breite | 795 millimeter |
| Unterstützte Mindestracktiefe | 290 millimeter |
| Maximal unterstützte Rack-Tiefe | 550 millimeter |
| Innere Tiefe | 795 millimeter |

| | |
|---|---|
| Produkt Gewicht | 77000 gram |