

HDD

>AL14SXB SERIES

Enterprise Performance HDD

The 12.0 Gbit/s^[1] SAS interface AL14SX Series Enterprise Performance HDDs are Toshiba's highest-performing 15,000rpm model line. Engineered for mission critical IT operations, an array of models are available with 512 native (512n), or emulated 512 (512e) or 4K native sector length technologies for optimum application and operating system compatibility. Toshiba's Persistent Write Cache technology protects against data loss in the event of unexpected power loss, and helps maintain optimum data reliability for high-duty cycle Mission Critical environments.



> KEY FEATURES

- 900, 600 and 300GB^[2] Capacity Models
- Space Efficient, Power Saving 2.5-inch^[3] Form Factor
- 12.0 Gbit/s SAS Interface for Better Performance
- 15,000 rpm Performance
- Industry Leading Low Latency (2.0ms)
- 24/7 Mission Critical Workload Performance and Data Reliability
- 512n sector length support in all capacities for optimum legacy application compatibility
- Toshiba Persistent Write Cache Technology
- Sanitize Instant Erase (SIE^[4]) Option

> APPLICATIONS

- Tier 1 Mission-Critical Servers and RAID Storage
- Servers hosting transaction-based applications
- Rack-Optimized Data Centers
- Tiered Mission-Critical storage and Hybrid Arrays
- High-performance computing
- Mission-Critical Server Boot and Logging

> SPECIFICATIONS

Model numbers		AL14SXB90EA AL14SXB90EE AL14SXB90EN	AL14SXB60EA AL14SXB60EE AL14SXB60EN	AL14SXB30EA AL14SXB30EE AL14SXB30EN
Interface		SAS-3.0 (12.0 Gbit/s , 6.0 Gbit/s , 3.0 Gbit/s , 1.5 Gbit/s)		
Formatted Capacity		900 GB	600 GB	300 GB
Performance	Interface Speed		12.0 Gbit/s Max	
	Rotation Speed		15,000 rpm	
	Average Latency Time		2.0ms	
	Buffer Size		128 MiB ^[5]	
	Data Transfer Speed (Sustained)	4Kn / 512e	290 MiB/s	
512n		259 MiB/s		
Logical Data Block Length	AL14SXB***A (fixed length)		4,096 B , 4,160 B , 4,224 B	
	AL14SXB***E (emulation)		HOST: 512 B, DISK: 4,096 B HOST: 520 B, DISK: 4,160 B HOST: 528 B, DISK: 4,224 B	
	AL14SXB***N (fixed length)		512 B , 520 B , 524 B , 528 B	
Supply Voltage	Allowable Voltage		12 V ^[6] ± 5 % / 5 V ^[6] ± 5% ^[7]	
Power Consumption ^[8]	Write / Read		9.0 W Max	
	Active Idle		5.6 W Typ.	
Acoustics (Sound Power)		33 dB Typ.		

> ENVIRONMENTAL LIMITS

Item		Specification
Temperature	Operating	5 °C to 55 °C
	Non-Operating	- 40 °C to 70 °C
Humidity	Operating	5 % to 95 % R.H. (No condensation)
	Non-Operating	5 % to 95 % R.H. (No condensation)
Shock	Operating	980 m/s ² { 100 G } / 2 ms duration
	Non-Operating	3,920 m/s ² { 400 G } / 2 ms duration
Vibration ^[9]	Operating ^[10]	9.8 m/s ² { 1 G } (20 to 300 Hz) or less
	Non-Operating ^[11]	49 m/s ² { 5 G } (20 to 300 Hz) or less
Altitude	Operating	- 305 m to 3,048 m
	Non-Operating	- 305 m to 12,192 m

> RELIABILITY

Item	Specification
MTTF ^[12]	2,000,000 hours
Non-recoverable Error Rate	10 error per 10 ¹⁷ bits read
Load / Unload	600,000 times
Availability	24 hours/day, 7 days/week

[1] Read and write speed may vary depending on the host device, read and write conditions, and file size.

[2] Definition of capacity: Toshiba defines a megabyte (MB) as 1,000,000 bytes, a gigabyte (GB) as 1,000,000,000 bytes and a terabyte (TB) as 1,000,000,000,000 bytes. A computer operating system, however, reports storage capacity using powers of 2 for the definition of 1GB = 2³⁰ = 1,073,741,824 bytes and therefore shows less storage capacity. Available storage capacity (including examples of various media files) will vary based on file size, formatting, settings, software and operating system, such as Microsoft Operating System and/or pre-installed software applications, or media content. Actual formatted capacity may vary.

[3] "2.5-inch" and "3.5-inch" mean the form factor of HDDs or SSDs. They do not indicate drive's physical size.

[4] Sanitize Instant Erase. SIE is a function to invalidate the data recorded on the magnetic disks at a blink.

[5] A kibibyte (KiB) means 2¹⁰, or 1,024 bytes, a mebibyte (MiB) means 2²⁰, or 1,048,576 bytes, and a gibibyte (GiB) means 2³⁰, or 1,073,741,824 bytes.

[6] Input voltages are specified at the HDD connector side, during HDD ready state.

[7] Make sure the value is not less than -0.3V DC (less than -0.6V, 0.1ms) when turning on or off the power.

[8] Power supply at nominal voltage ±1%. 25°C ambient. Refer to Subsection 2.5 "Power conditions" of the SAS INTERFACE SPECIFICATION for details of idle and ready states. "Ready state" corresponds to 2.5.2 "Active state" of the SAS INTERFACE SPECIFICATION.

[9] Vibration applied to the HDD is measured at near the mounting screw hole on the frame as much as possible.

[10] At random seek write/read and default on retry setting with log sweep vibration.

[11] At power-off state after installation

[12] MTTF (Mean Time to Failure) is not a guarantee or estimate of product life; it is a statistical value related to mean failure rates for a large number of products which may not accurately reflect actual operation. Actual operating life of the product may be different from the MTTF.

> MODEL NUMBERS

Model Numbers	Interface	Formatted Capacity	Sector Format	Optional Security Function
AL14SXB90EA	SAS-3.0	900 GB	4Kn	
AL14SXB90EE	SAS-3.0	900 GB	512e	
AL14SXB90EN	SAS-3.0	900 GB	512n	
AL14SXB60EA	SAS-3.0	600 GB	4Kn	
AL14SXB60EE	SAS-3.0	600 GB	512e	
AL14SXB60EN	SAS-3.0	600 GB	512n	
AL14SXB30EA	SAS-3.0	300 GB	4Kn	
AL14SXB30EE	SAS-3.0	300 GB	512e	
AL14SXB30EN	SAS-3.0	300 GB	512n	
AL14SXB90EAY	SAS-3.0	900 GB	4Kn	SIE
AL14SXB90ENY	SAS-3.0	900 GB	512n	SIE
AL14SXB60EAY	SAS-3.0	600 GB	4Kn	SIE
AL14SXB60ENY	SAS-3.0	600 GB	512n	SIE
AL14SXB30EAY	SAS-3.0	300 GB	4Kn	SIE
AL14SXB30ENY	SAS-3.0	300 GB	512n	SIE

> MARKING

1) WEEE

Following information is only for EU-member states:

The use of the symbol indicates that this product may not be treated as household waste. By ensuring this product is disposed of correctly, you will help prevent potential negative consequences for the environment and human health, which could otherwise be caused by inappropriate waste handling of this product. For more detailed information about recycling of this product, please contact your local city office, your household waste disposal service or the shop where you purchased the product.



2) Names and Contents of Hazardous Substances or Elements in Products

产品中有害物质的名称及含量

部件名称	有害物质					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
HDD(硬盘驱动器)	×	○	○	○	○	○

本表格依据 SJ/T 11364 的规定编制。
 ○：表示该有害物质在该部件所有均质材料中的含量均在 GB/T 26572 规定的限量要求以下。
 ×：表示该有害物质至少在该部件的某一均质材料中的含量超出 GB/T 26572 规定的限量要求。



中华人民共和国环保使用期限

> SAFETY / EMI STANDARDS

Title	Description	Region
UL (Underwriters Laboratories)	UL 60950-1	USA
CSA (Canadian Standard Association)	CAN/CSA-C22.2 No.60950-1	Canada
TÜV (Technischer Überwachungs Verein)	EN 60950-1	Germany
BSMI (Bureau of Standards, Metrology and Inspection)	CNS 13438 (CISPR Pub. 22 Class B):D33003	Taiwan
MSIP (Ministry of Science, ICT & Future Planning)	KN32, KN35 (CISPR Pub. 32 Class B) (Note 1)	Korea
ACMA (Australian Communications and Media Authority)	AS/NZS CISPR32	Australia


(Note 1) Marks of KC

Made in Japan	 <ul style="list-style-type: none"> 1. 기기의 명칭(모델명) : AL14SXB90EA 2. 인증번호 : MSIP-REM-TSD-AL14SXB90EA 3. 인증받은 자의 상호 : TOSHIBA CORPORATION 4. 제조년월일 : 2016-06 5. 제조자 / 제조국가 : TOSHIBA CORPORATION / 일본
Made in Philippines	 <ul style="list-style-type: none"> 1. 기기의 명칭(모델명) : AL14SXB90EA 2. 인증번호 : MSIP-REM-TSD-AL14SXB90EA 3. 인증받은 자의 상호 : TOSHIBA CORPORATION 4. 제조년월일 : 2016-06 5. 제조자 / 제조국가 : TOSHIBA CORPORATION / 필리핀

<p>B급 기기 (가정용 방송통신기자재)</p>	<p>이 기기는 가정용(B급) 전자파적합기기로서 주로 가정에서 사용하는 것을 목적으로 하며, 모든 지역에서 사용할 수 있습니다.</p>
---------------------------------------	---



> MECHANICAL SPECIFICATIONS

Item	AL14SXB90 A/E/N , AL14SXB60 A/E/N , AL14SXB30 A/E/N
Width	70.10 mm Max
Height	15.00 mm Max
Length	100.45 mm Max
Weight	230 g Max

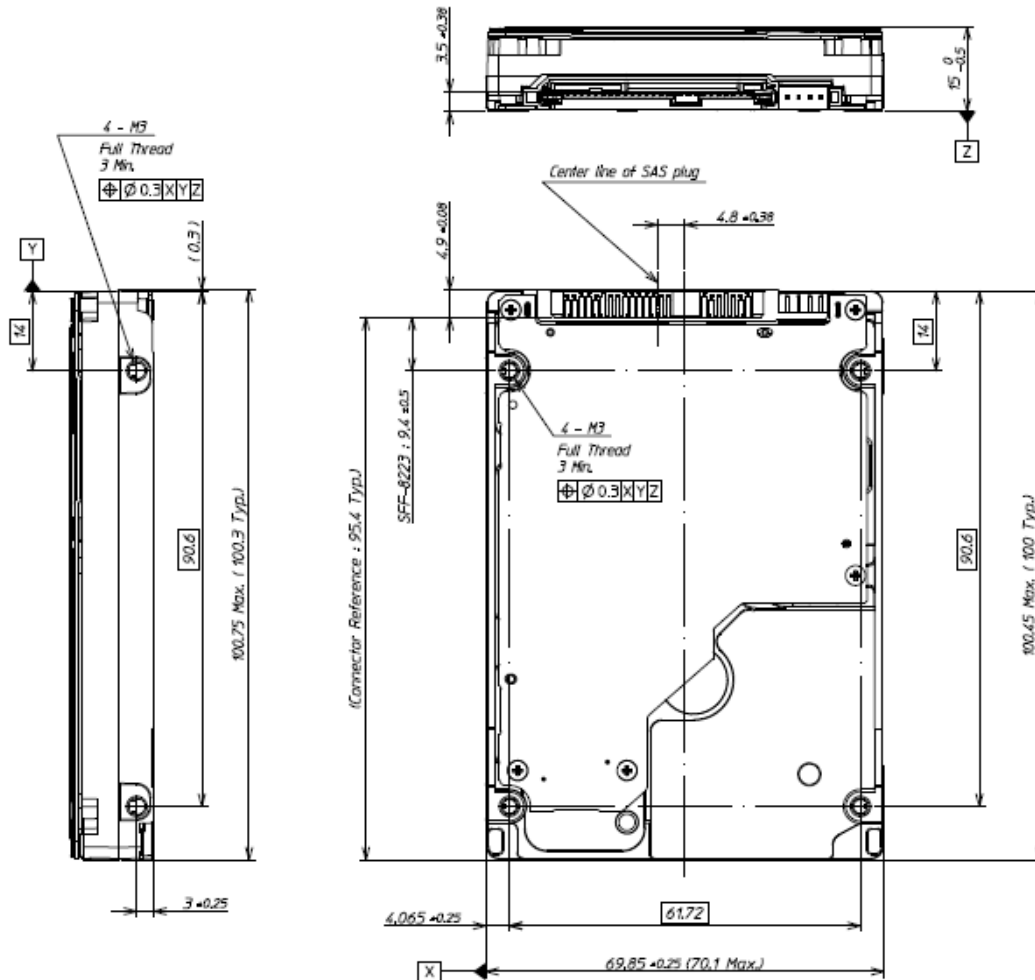

[Unit: mm]
(Reference)

> INTERFACE CONNECTOR

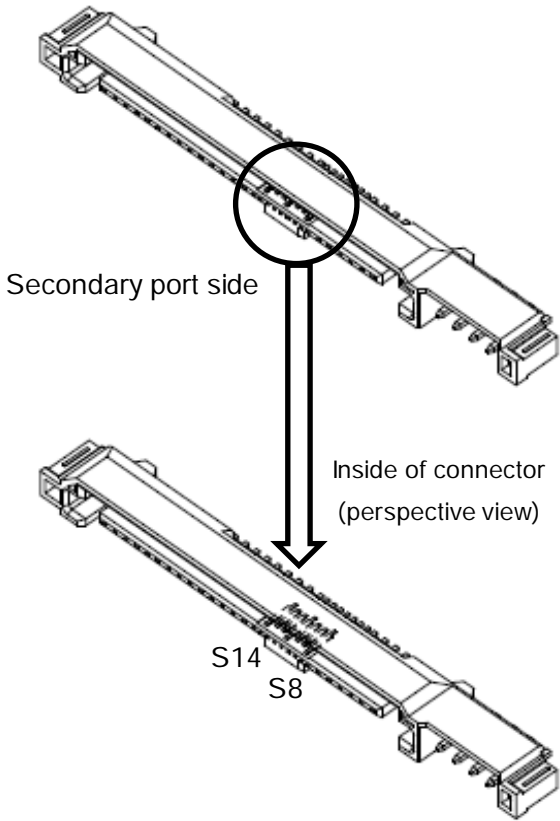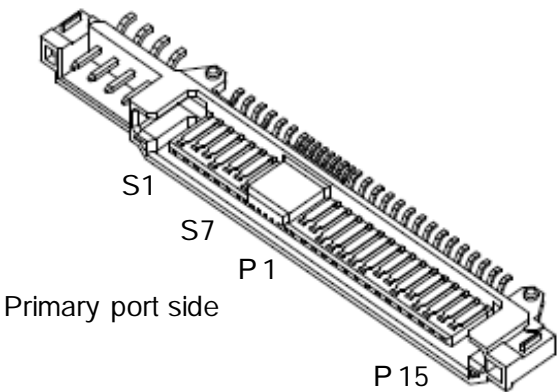

> INTERFACE CONNECTOR (SAS plug) SIGNAL ALLOCATION: CN1

Segment	Pin No.	Pin Definition	
Signal Segment	S1	GND	GND for SAS Primary Port
	S2	RP+	SAS Primary Port Receive (positive) signal
	S3	RP-	SAS Primary Port Receive (negative) signal
	S4	GND	GND for SAS Primary Port
	S5	TP-	SAS Primary Port Transmit (negative) signal
	S6	TP+	SAS Primary Port Transmit (positive) signal
	S7	GND	GND for SAS Primary Port
	S8	GND	GND for SAS Secondary Port
	S9	RS+	SAS Secondary Port Receive (positive) signal
	S10	RS-	SAS Secondary Port Receive (negative) signal
	S11	GND	GND for SAS Secondary Port
	S12	TS-	SAS Secondary Port Transmit (negative) signal
	S13	TS+	SAS Secondary Port Transmit (positive) signal
	S14	GND	GND for SAS Secondary Port
Power Segment	P1 ^[13]	Reserved	Do not supply 3.3V power if POWER DISABLE Function is used.
	P2 ^[13]	Reserved	
	P3 ^[14]	POWER DISABLE	Power Disable Control input signal
	P4	GND	GROUND
	P5	GND	GROUND
	P6	GND	GROUND
	P7	+5V-Charge	Pre-charge pin for +5V
	P8	+5V	+5V power supply input
	P9	+5V	+5V power supply input
	P10	GND	GROUND
	P11	READY LED	READY LED output
	P12	GND	GROUND
	P13	+12V-Charge	Pre-charge pin for +12V
	P14	+12V	+12V power supply input
	P15	+12V	+12V power supply input

[13] Do not supply 3.3V power if POWER DISABLE feature is used.

[14] The terminal P3 is used as POWER DISABLE control signal in SAS-3. This terminal connects with the GROUND or is an OPENED thing on the host side when the POWER DISABLE function is not used.

> COMMAND TABLE (Part 1)

Op-Code	Command Name
00h	TEST UNIT READY
12h	INQUIRY
25h	READ CAPACITY (10)
9Eh/10h	READ CAPACITY (16)
15h	MODE SELECT (6)
55h	MODE SELECT (10)
1Ah	MODE SENSE (6)
5Ah	MODE SENSE (10)
01h	REZERO UNIT
1Bh	START/STOP UNIT
16h	RESERVE (6)
56h	RESERVE (10)
17h	RELEASE (6)
57h	RELEASE (10)
03h	REQUEST SENSE
4Ch	LOG SELECT
4Dh	LOG SENSE
5Eh	PERSISTENT RESERVE IN
5Fh	PERSISTENT RESERVE OUT
A0h	REPORT LUNS
A3h/05h	REPORT IDENTIFYING INFORMATION
A4h/06h	SET IDENTIFYING INFORMATION
A3h/0Ch	REPORT SUPPORTED OPERATION CODES
A3h/0Dh	REPORT SUPPORTED TASK MANAGEMENT FUNCTIONS

> COMMAND TABLE (Part 2)

Op-Code	Command Name
08h	READ (6)
28h	READ (10)
A8h	READ (12)
88h	READ (16)
0Ah	WRITE (6)
2Ah	WRITE (10)
AAh	WRITE (12)
8Ah	WRITE (16)
2Eh	WRITE AND VERIFY (10)
AEh	WRITE AND VERIFY (12)
8Eh	WRITE AND VERIFY (16)
2Fh	VERIFY (10)
AFh	VERIFY (12)
8Fh	VERIFY (16)
0Bh	SEEK (6)
2Bh	SEEK (10)
35h	SYNCHRONIZE CACHE (10)
91h	SYNCHRONIZE CACHE (16)
04h	FORMAT UNIT
07h	REASSIGN BLOCKS
37h	READ DEFECT DATA (10)
B7h	READ DEFECT DATA (12)
1Dh	SEND DIAGNOSTIC
1Ch	RECEIVE DIAGNOSTIC RESULTS
3Bh	WRITE BUFFER
3Ch	READ BUFFER
3Eh	READ LONG (10)
9Eh/11h	READ LONG (16)
3Fh	WRITE LONG (10)
9Fh/11h	WRITE LONG (16)
41h	WRITE SAME (10)
93h	WRITE SAME (16)

> RESTRICTIONS ON PRODUCT USE

- Toshiba Corporation, and its subsidiaries and affiliates (collectively "TOSHIBA"), reserve the right to make changes to the information in this document, and related hardware, software and systems (collectively "Product") without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before creating and producing designs and using, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and (b) the instructions for the application that Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
- Except for specific applications as expressly stated in this document, Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, devices related to electric power, and equipment used in finance-related fields.
If you use the Product for Unintended Use, TOSHIBA assumes no liability for the Product.
Please contact your TOSHIBA sales representative, before you create designs including the Product for Unintended Use.
- Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Product may include products subject to foreign exchange and foreign trade control laws.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. TOSHIBA assumes no liability for damages or losses occurring as a result of noncompliance with applicable laws and regulations.