

DIGITUS® CAT 5e Patch Cable Adapter, shielded



✓ Patch Cable Adapter

✓ Category: 5e

✓ Shielded

✓ 2x RJ45 jack to 1xRJ45 plug

Abstract

DIGITUS® CAT 5e Patch Cable Adapter, shielded, available with different pin assignments

Features

- Assignment "AT-AG CX2": 1:1
- Assignment "DN-93904": 1-1, 2-2, 3-3, 4-1, 5-2, 6-6, 7-3, 8-6
- 2x RJ45 female to 1x RJ45 male
- Shielded
- Length: 0.19 m
- Material enclosure: ABS non halogen, UL 94 V0
- Material surface: Copper with shining nickel
- Material PCB: FR4, 1.2 mm thickness
- Material IDC Terminal: Phosphor bronze with 50µ tin plated over 60 µ nickel plated
- Mating cycles: ≥ 750
- Operating temperature: -40 °C to +80 °C

Product Overview

The shielded CAT 5e patch cable adapter from DIGITUS® consists of two RJ45 female ports and one RJ45 male port. It is available with the assignment "1:1" or "1-1, 2-2, 3-3, 4-1, 5-2, 6-6, 7-3, 8-6".

Product Number Information

DN-93904	DIGITUS® CAT 5e Patch Cable Adapter, shielded, 2x RJ45 jack to 1x RJ45 plug, cable length 0.19 m, assignment: 1-1, 2-2, 3-3, 4-1, 5-2, 6-6, 7-3, 8-6
AT-AG CX2	DIGITUS® CAT 5e Patch Cable Adapter, shielded, 2x RJ45 jack to 1x RJ45 plug, cable length 0.19 m, assignment: 1:1

Product Images

DN-93904




AT-AG CX2




Technical Drawings

DN-93904

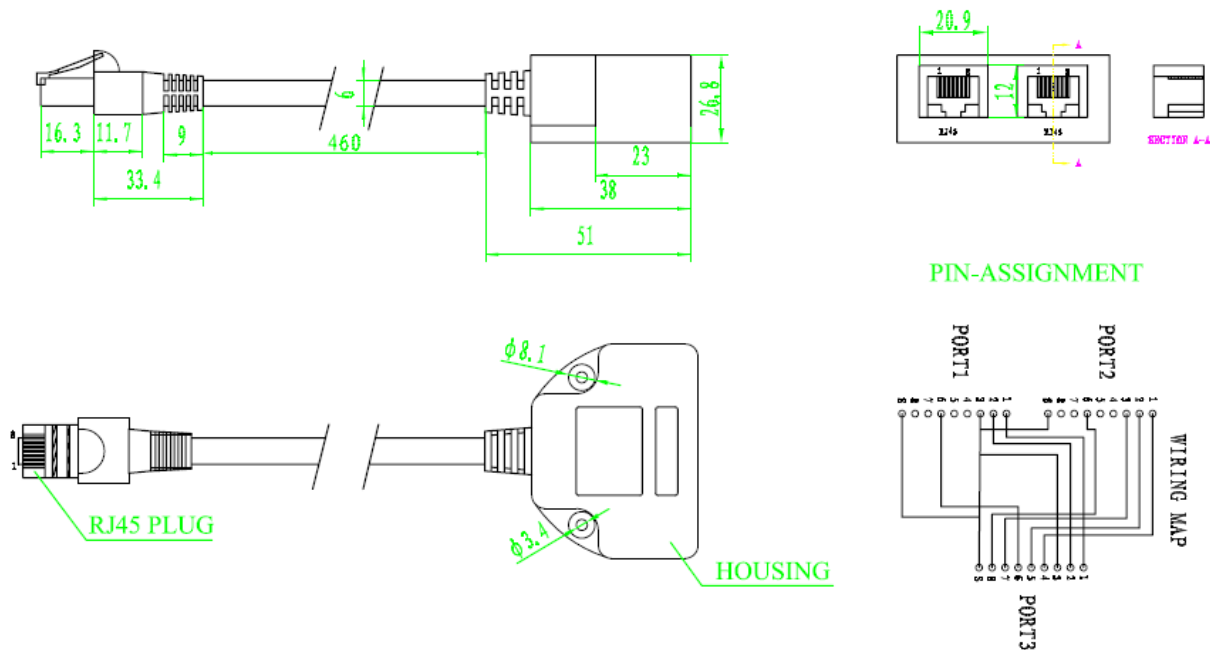

AT-AG CX2

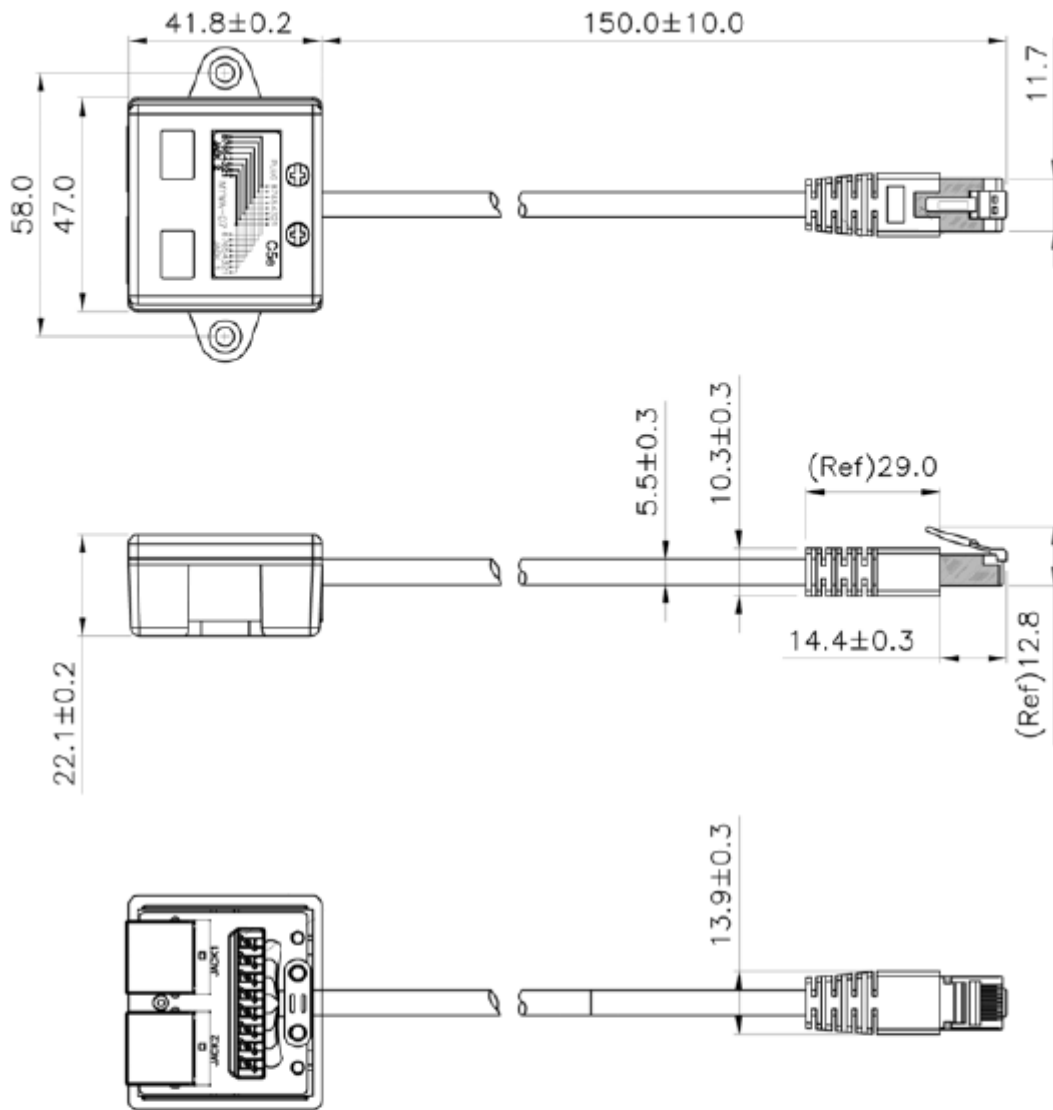

Wiring information

