


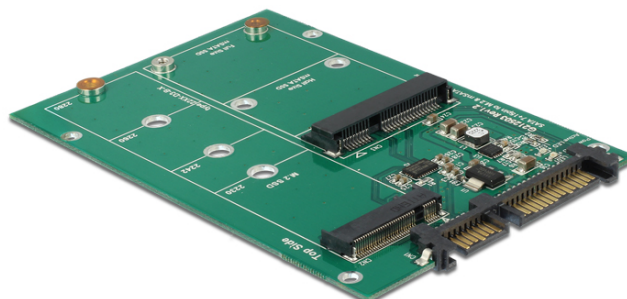

Delock Converter SATA 22 Pin > 1 x M.2 NGFF + 1 x mSATA

Description

This Delock converter enables you to connect a M.2 NGFF SSD in 2280, 2260, 2242 and 2230 format or a mSATA module. The converter can be installed into your system internally through a SATA 22 pin interface.

M.2

Note

The operation of both modules at the same time is not possible. If you connect both modules to the slots, only the M.2 NGFF module will be identified. For activation of the mSATA module the M.2 NGFF module needs to be removed.

Specification

- Connector:
 - 1 x SATA 6 Gb/s 22 pin male >
 - 1 x 67 pin M.2 NGFF key B slot
 - 1 x mSATA slot (full size)
- Interface: SATA
- Supports M.2 NGFF modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
- Maximum height of the components on the module: 1.35 mm, application of double-sided assembled modules supported
- LED indicator for power and activity
- PWM chipset: max. 3 A output current, short circuit protection, in-rush current suppression, thermal shutdown protection
- Bootable
- Dimensions (LxW): ca. 98 x 65.5 mm
- OS independent, no driver installation necessary

System requirements

- A free SATA 22 pin interface

Package content

- Converter
- Mounting material

Item No. 62670

EAN: 4043619626700

Country of origin: China

Package: Box



Images

