

T8 Luxline Plus Special Length
F25W/30/T8/840
0000877

Product features



NOTES

undefined

PRODUCT OVERVIEW

Product name	F25W/30/T8/840
Technology	Fluorescent
Watt (Rated) (W)	26.00
Lamp shape	Tube, double-ended
Type	T8 Luxline Plus Special Length
Cap/Base	G13
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Residential & Consumer, Retail
ETIM Class	EC000108
E-number SE	8356801
Luminous flux (lm)	2200
Colour temperature (K)	4000
Light colour	Cool White
Colour Code	840
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM5
Photobiological Risk Group	Not applicable
Wattage (W)	25.00
Product Voltage (V)	84
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
Average life (Nominal) (h)	20000
Product EAN number	5410288008776

DATA TABLE

General data	
Product name	F25W/30/T8/840

T8 Luxline Plus Special Length

F25W/30/T8/840

0000877

Technology	Fluorescent
Watt (Rated) (W)	26.00
Lamp shape	Tube, double-ended
Type	T8 Luxline Plus Special Length
Cap/Base	G13
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Residential & Consumer, Retail
ETIM Class	EC000108
E-number SE	8356801

Optical data

Luminous flux (lm)	2200
Luminous flux (Rated) (lm)	2200
Ambient temperature for maximum luminous flux (°C)	25
Colour temperature (K)	4000
Light colour	Cool White
Colour Code	840
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM5
Adjustable chromaticity	N
Photobiological Risk Group	Not applicable
Rated lumen maint. factor (%) at 2000 h 50Hz	0.96
Rated lumen maint. factor (%) at 4000 h 50Hz	0.94
Rated lumen maint. factor (%) at 6000 h 50Hz	0.92
Rated lumen maint. factor (%) at 8000 h 50Hz	0.91
Rated lumen maint. factor (%) at 12000 h 50Hz	0.90
Rated lumen maint. factor (%) at 16000 h 50Hz	0.89
Rated lumen maint. factor (%) at 20000 h 50Hz	0.87

Electrical data

Wattage (W)	25.00
Watt (Rated) - High frequency (W)	24.50
Current (A)	0.360
Product Voltage (V)	84
Control gear required	Yes
Transformer required	No
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
Drive current (mA)	360
Lamp Energy Label (class)	G
kWh per 1000 hours burning time	30

T8 Luxline Plus Special Length

F25W/30/T8/840

0000877

Lifetime data

Average life (Nominal) (h)	20000
Average life (Rated) (h)	20000
Rated survival factor (%) at 2000 h 50Hz	0.99
Rated survival factor (%) at 4000 h 50Hz	0.98
Rated survival factor (%) at 6000 h 50Hz	0.96
Rated survival factor (%) at 8000 h 50Hz	0.94
Rated survival factor (%) at 12000 h 50Hz	0.92
Rated survival factor (%) at 16000 h 50Hz	0.80
Rated survival factor (%) at 20000 h 50Hz	0.50

Physical data

Nominal Product Length (mm)	750.0
Nominal Product Diameter (mm)	26
Max. Length base to base (mm) - A	742.2
Length base to pin Min-Max (mm) - B	746.9-749.3
Max. Lamp Length (mm) - C/L	756.4
Max. Lamp Diameter (mm) - D	28.0
Weight (kg)	0.103

Packaging


Single packaging type	Carton
Product EAN number	5410288008776
Packaging single length / height (cm)	75.7
Packaging single width (cm)	2.9
Packaging single depth (cm)	2.8
DUN14 (outer)	15410288008773
Units per outer package	25
Packaging outer length / height (cm)	78.5
Packaging outer width (cm)	15.5
Packaging outer depth (cm)	15.0

Safety data


Lamp mercury content (mg)	2.80
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	Yes
Suitable for household illumination	Yes

PHOTOMETRY


T8 Luxline Plus Special Length
F25W/30/T8/840
0000877

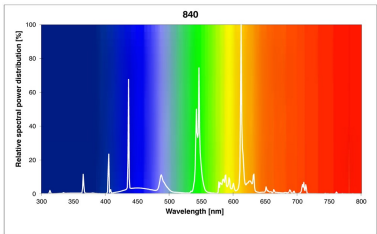

TECHNICAL DRAWINGS



0000877

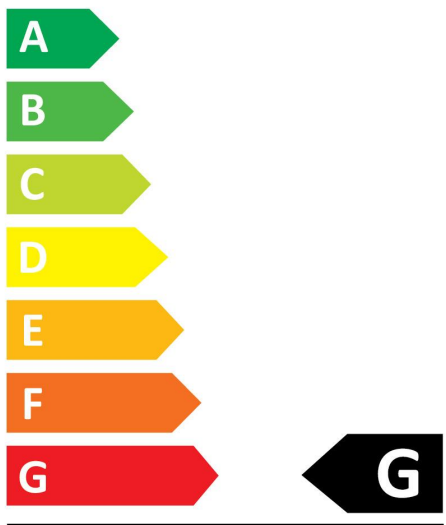


25
kWh/1000h



2019/2015

T8 Luxline Plus Special Length
F25W/30/T8/840
0000877


SYLVANIA
0000877

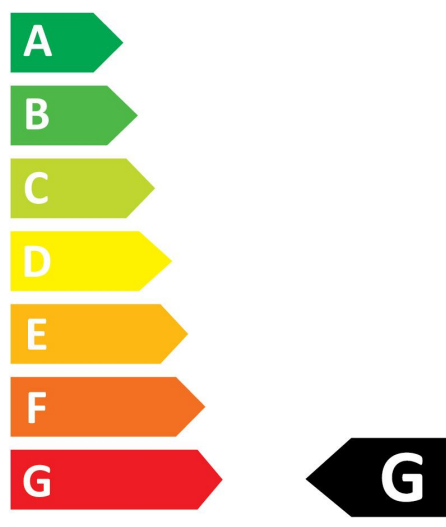

25
kWh/1000h

