


B75IA-E33 (MS-7733v3.1) Mini-ITX Mainboard

Support 3rd Gen Intel® Core™ i7 / Core™ i5 / Core™ i3 / Pentium® / Celeron® processors in an LGA 1155 socket

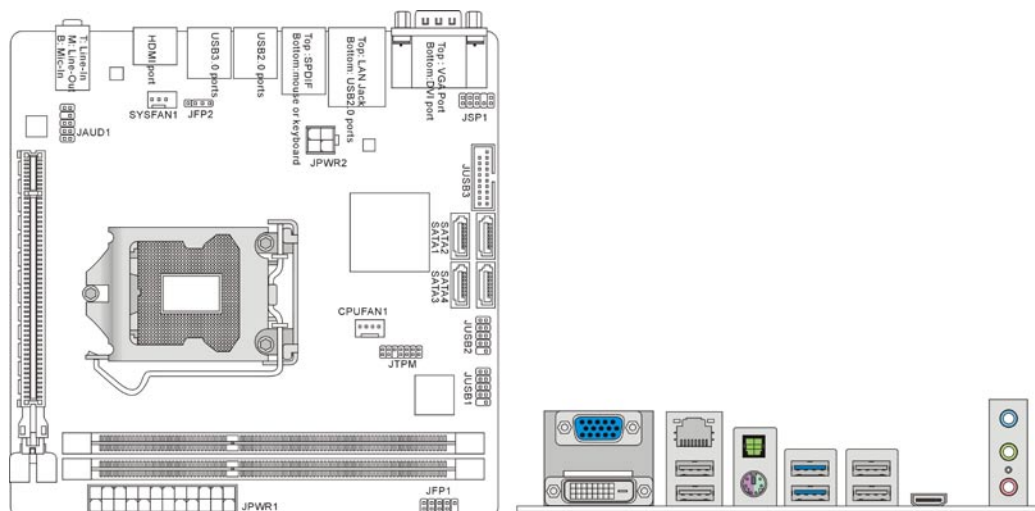

Mainboard Specification

Processor Support ■ Support 3rd Gen Intel® Core™ i7 / Core™ i5 / Core™ i3 / Pentium® / Celeron® processors in an LGA 1155 socket	Connectors ■ Back panel - 1 PS/2 mouse or keyboard port - 1 SPDIF port - 4 USB 2.0 ports - 2 USB 3.0 ports - 1 HDMI port - 1 VGA port - 1 DVI port - 1 LAN port - 3 flexible audio ports ■ On-Board - 2 USB 2.0 connectors - 1 USB 3.0 connector - 1 Front Panel Audio connector - 1 TPM Module connector
Base Clock ■ 100 MHz	Slots ■ 1 x PCI Express 3.0 x16 slot
Chipset ■ Intel® B75 chipset	Form Factor ■ Mini-ITX (170.0 X 170.0 mm)
Memory Support ■ 2 DIMMs support for DDR3-1066/1333/1600 MHz up to 16GB max ■ Supports Dual-Channel mode	Feature on Focus ■ Active Phase Switching (APS) ■ Click BIOS II ■ M-Flash ■ SATA 6Gb/s ■ Small Business Advantage ■ USB 3.0 ■ PCIe 3.0
LAN ■ Supports LAN 10/100/1000 Fast Ethernet by Realtek® RTL8111E	Mounting ■ 6 mounting holes
Audio ■ Chip integrated by Realtek® ALC887 ■ Flexible 8-channel audio with jack sensing ■ Compliant with Azalia 1.0 Spec	
SATA ■ 1 SATA 6Gb/s (SATA1) port by Intel® B75 ■ 3 SATA 3Gb/s (SATA2~4) ports by Intel® B75	
USB 3.0 ■ 4 USB 3.0 ports by Intel® B75 (rear x 2, front x 2)	

These specification is subject to change without prior notice.