



Room thermostat, flush-mounted Sliding switch, actual value indication

Functions at a glance

- With actual value temperature display
- Automatic controller calibration
- Switch contact opens when the set temperature is reached.
- With built-in slide switch and control lamp for nightly reduction of 4 K.
- With fixing claws.
- Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
- Class of temperature controller 1
- Contribution to space heating energy efficiency 1,0%.
- Rated voltage: 230 V~
- Rated current: 10 A
- Temperature range (device): 5 °C - 30 °C
- Dimensions: (L x W x D): 71 mm x 71 mm x 52 mm
- Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
- Servo-valves, "closed when de-energized", are necessary for connection to thermostat. e.g. Article No. 6164/10-, see KNX chapter.
- Switching temperature difference: ± 0.5 K.

Order details

Article No.:	1095 UTA
Order No.:	2CKA001032A0488
EAN:	4011395078624
Customs tariff number:	90321020
Preisgruppe:	19
Preis:	141,00 EUR plus VAT
Info sheet:	» Download PDF

Downloads


Instruction manual

- » [Product manual](#)
- » [Installation and operating instructions](#)


Certificates

- » [EU-declaration of conformity](#)
- » [ROHS product declaration](#)

Dimensions

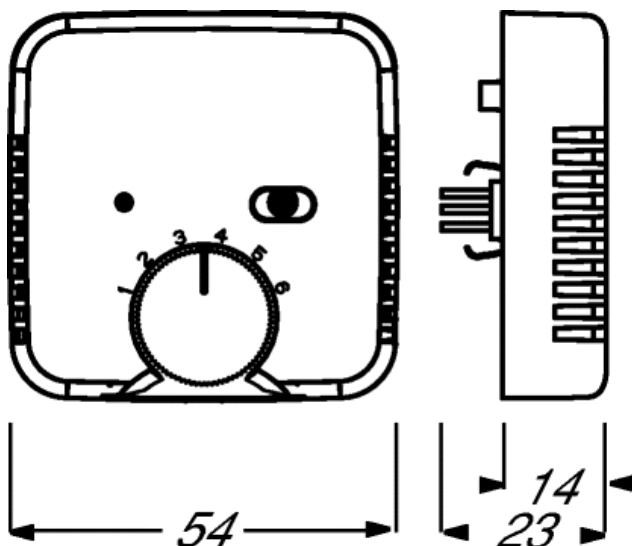

Wiring diagram

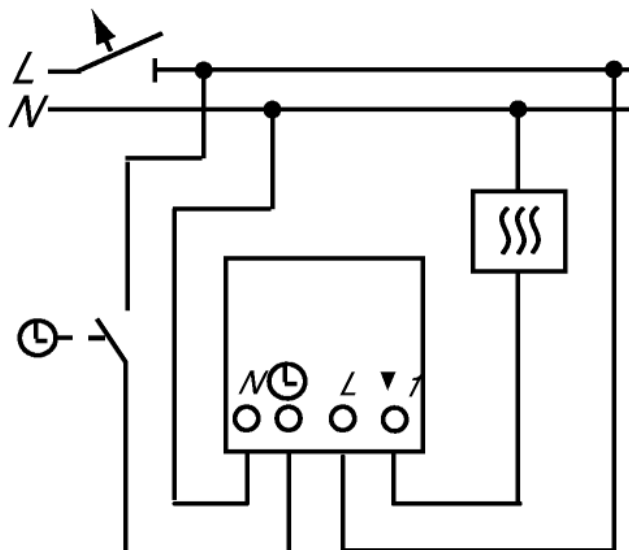

Electronic ambient temperature controller with normally open contact 1094 U/..TA, 1095 U/..TA, 1096 U/..TA (24 V in that case)