

Qty.	Description
------	-------------

1	SCALA1 3-35
---	---------------------------



Product No.: [99530404](#)

The Grundfos SCALA1 is a self-priming, multistage pump, that incorporates all the components of a pressure booster into a compact composite enclosure.

As it is self-priming, the SCALA1 can pump water from a level below the pump.

Provided it is filled with water, the pump can lift water from a depth of 8 m in less than 5 minutes.

This facilitates easy installation and start-up of the pump and provides more reliable water supply in installations where there is a risk of dry running and leakages in suction hose or pipes.

SCALA1 can communicate with Grundfos GO app via built in Bluetooth, which enables detailed pump monitoring and high customization options, making this pump a good fit for every application.

SCALA1 incorporates advanced protection features such as:


- Dry running protection that will automatically stop the pump in case of water shortage
- Cycling protection which will prevent pump starting frequently in case of minor leakages in installation
- Max runtime protection can stop the pump after a desired period of continuous operation, preventing potential damage due flooding in case of pipe breakages.

The pump has a built-in motor protection that will stop the pump if exposed to excessive temperature due to high ambient temperature, in case of seizure or overload, thus preventing a motor burnout.

With Grundfos GO you can easily setup SCALA1 as a Twin booster system, operating as duty/stand by as well as duty/assist. It is also possible to add external input control and schedule a pump operation via calendar function.

SCALA1 require no maintenance, but it is recommended to keep the pump clean, check the non-return valves and keep the ventilation holes free of dust.

Description	Value
General information:	
Product name:	SCALA1 3-35
Product No:	99530404
EAN number:	5713830591581
Technical:	
Rated flow:	3.72 m³/h
Rated head:	20 m
Maximum head:	36 m
Shaft seal type:	BVBP
Approvals:	CE,EAC,AAA
Approvals for drinking water:	WRAS,ACS
Curve tolerance:	ISO9906:2012 3B
Model:	A
Start pressure:	1.5 bar
Materials:	
Pump housing:	Composite
Impeller:	Composite
Installation:	
Range of ambient temperature:	0 .. 55 °C
Maximum operating pressure:	8 bar
Maximum permissible inlet pressure:	4 bar
Type of inlet connection:	R
Type of outlet connection:	R
Size of inlet connection:	1 inch
Size of outlet connection:	1 inch
Pressure rating for connection:	PN 8
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	0 .. 45 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m³
Electrical data:	
P1 max.:	720 W
Rated power - P2:	0.45 kW
Mains frequency:	50 Hz
Rated voltage:	1 x 230 V
Maximum current consumption:	3.27 A
Enclosure class (IEC 34-5):	X4D
Insulation class (IEC 85):	F
Length of power cable:	1.5 m
Power plug:	Type E/F (CEE7/7)
Power plug:	Schuko plug
Others:	
Net weight:	11.5 kg
Gross weight:	13.5 kg
Shipping volume:	0.046 m³
Storage temperature range:	-40 .. 70 °C
Swedish RSK No.:	5855730
Finnish LVI No.:	4732547

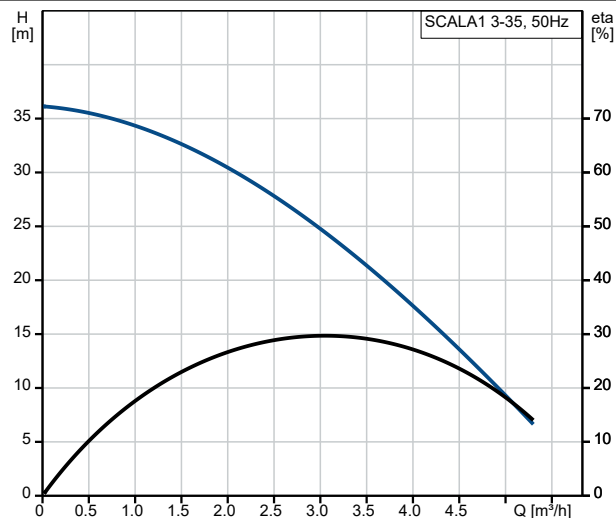

Pumped liquid = Water
Liquid temperature during operation = 20 °C
Density = 998.2 kg/m³

