

# DIGITUS® HDMI adapter, 90° angled

AK-330502-000-S

EAN 4016032296164



## HHDMI Adapter, Type A, 90° angled M/F, UHD 4K@60Hz, gold, bl

This 4K 60Hz and 3D suitable adapter is used to ensure a better connection of normal HDMI cables with straight connectors in case of lack space. To avoid to bend the cable more than necessary, for example .

### 4K/Ultra HD and 3D capable + Ethernet connectivity

- Support up to 4K/2K with 60Hz
- Manufacturer's notice: Please check whether the adapter enables the desired angle direction for your application. Please note the plug-in direction on your device.

### Attributes


- Assortment: HDMI Cables

- Color cable: black
- Color connector: black
- Connector 1: HDMI type A, plug
- Connector 2: HDMI type A, jack
- Connector surface: nickel-plated
- HDMI Standard: Premium High Speed HDMI with Ethernet
- HDTV Standard: Ultra HD 4K
- Hoods: molded
- Packaging: Polybag
- Resolution max.: 3840 x 2160 Pixel, 60Hz
- Length: 0.02 m
- AOC - Active Optical Cable: no
- Shielding: single shielding

## Logistics

|                                 | Number<br>(pcs) | Weight<br>(kg) | Depth<br>(cm) | Width<br>(cm) | Height<br>(cm) | cm³       |
|---------------------------------|-----------------|----------------|---------------|---------------|----------------|-----------|
| Packaging Unit Carton           | 250             | 4.50           | 32.00         | 30.00         | 22.00          | 21,120.00 |
| Packaging Unit Inside           | 50              | 0.90           | 4.00          | 18.00         | 25.00          | 1,800.00  |
| Packaging Unit Single           | 1               | 0.02           | 1.50          | 7.00          | 7.50           | 78.75     |
| Net single without<br>Packaging | 1               | 0.00           | 0.00          | 0.00          | 0.00           | 0.00      |

## More images:

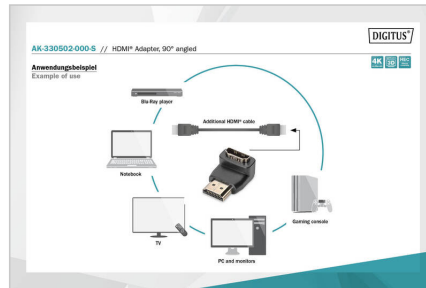

## Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

## EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schöffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)