

Multifunctional Coaxial Sound System **X1**




Multifunktionales und kompaktes 2-Wege System der Oberklasse. Der koaxiale Aufbau sorgt in Kombination mit einem aufwendig entwickelten und großflächigen Horn für ein absolut gleichmäßiges Übertragungsverhalten auch außerhalb der Hauptabstrahlachse. Hochleistungs-Neodymantriebe und Langhubschwingspulen sorgen für einen hohen Wirkungsgrad bei gleichzeitig stark reduzierten Verzerrungen. Für die Installation und den universellen Einsatz stehen vier M10 Gewindeeinsätze zur Aufnahme des Zubehörs zur Verfügung.

PRODUCT SPECIFICATIONS

Speaker Components	6,5" Nd (2" VC) / 1" Nd (1,7" VC)
Description	Multifunctional Coaxial Sound System
Power AES / Peak	200 W / 600 W
Impedance nominal	8 Ω
SPL 1 W / Peak @ 1 m	92 dB / 120 dB
Usable Range	80 Hz - 19 kHz (-6 dB)
Tuning Frequency excursion minimum	90 Hz
X - Overpoint acoustical	1,9 kHz
Coverage horizontal / vertical	90° x 60° - rotatable
Connectors	2 x Neutrik Speakon NL4MP in/out Coding: 1 +/- HiMid, 2 +/- loop thru
Rigging / Fittings	4 x M10
Weight	5,5 kg
Size height x width x depth	31,0 x 20,0 x 22,0 cm
Order No.	01090



DIMENSIONS

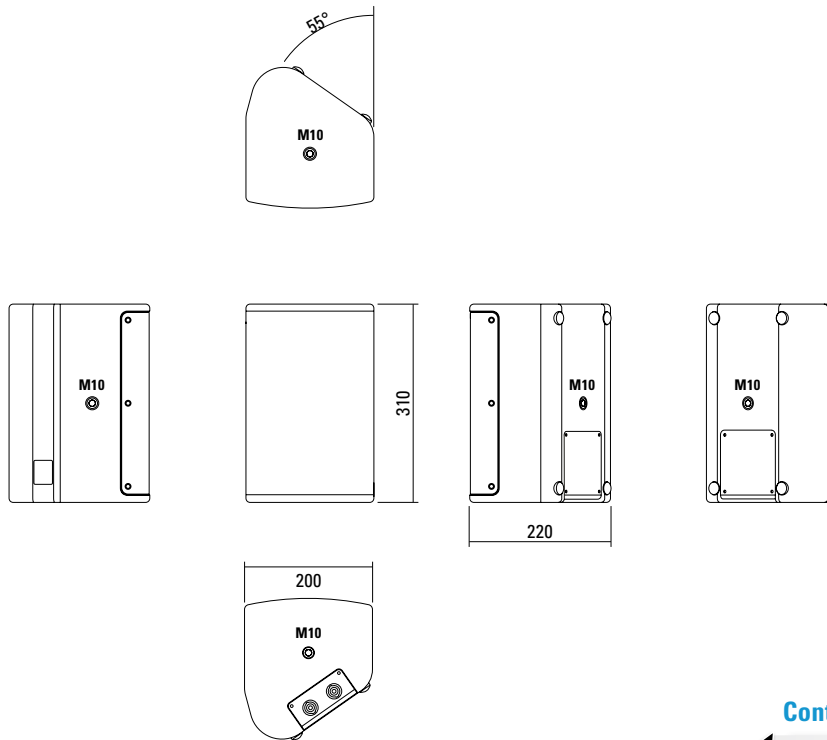


Controller Setups:


<https://www.seeburg.net/de/downloads>

MEASUREMENTS


2D Directivity Plot - horizontal

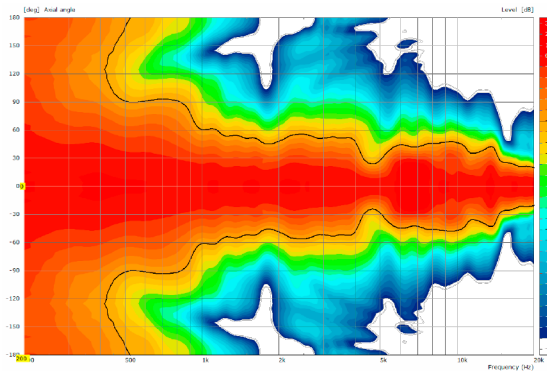


Sensitivity 1 W @ 1 m + Impedance

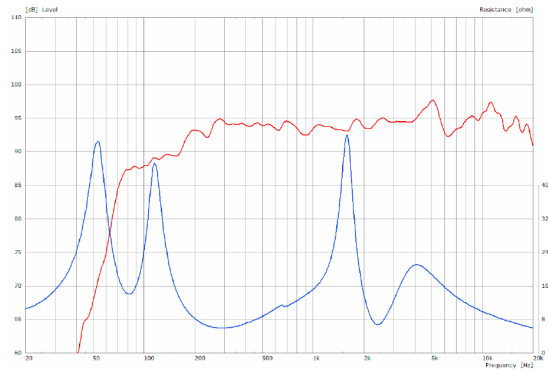

2D Directivity Plot - vertical

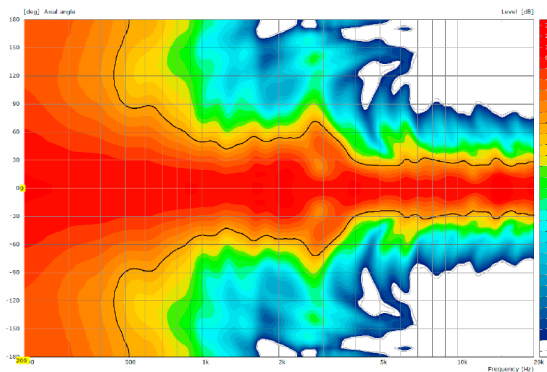

Frequency Response with Presets

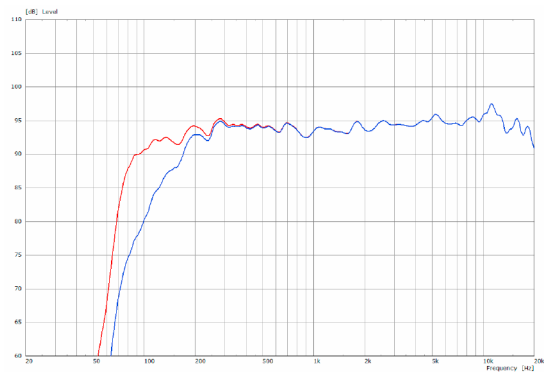

ACCESSORIES X 1

Flying J-Bracket



for A 1 / GL 8 / X 1 / X 2 / TS Nano,
horizontal and vertical alignment,
incl. (white version: 1 x M10 x 20
socket head screws, black version:
1 x M10 x 20 adjustable handle screw)
Order No. **01212/J/set/w** (RAL 9010)
Order No. **01212/J/set**

Handle Screw



for flying brackets,
adjustable
M10 x 20
Order No. **08375/20**

Flange



with ball and socket joint,
with additional locking screw,
M10 x 15, max. load 15 kg
Order No. **08125**

Knurled Head Nut



reduction screw for fastening
M10 Pole Mount Adapter (08126)
Order No. **73755**

Pole Mount Adapter



35 mm $\varnothing$ → M10 x 16 mm,
M8 x 20 star knob screw
Order No. **08126**

Wall Mount



M10, max. load 15 kg,
for permanent installation,
incl. tilt angle stop
Order No. **08131/F**
Order No. **08131/F/w** (RAL 9010)

Wall Mount



ball and socket joint flange (08125)
+ 08125/plate
Order No. **08125/set**

Quick Trigger Clamp - small



M10, max. load 20 kg
Order No. **01223/20 kg**

Truss Clamp



incl. M10 Adapter,
max. load 15 kg
Order No. **01221**

Ring Screw



M10– DIN 580
Order No. **73700** (zincd)
Order No. **73700/sw** (black zincd)

Steel Safety



4 mm x 600 mm, black,
max. load 10 kg (BGI 810-3),
quick connector undetachably
Order No. **01376/4**

Bag



for 2 x A 1 / 2 x TS Nano / 2 x X 1,
padded with pocket for accessories
Order No. **01249**

