





USER MANUAL

01. Controller Description

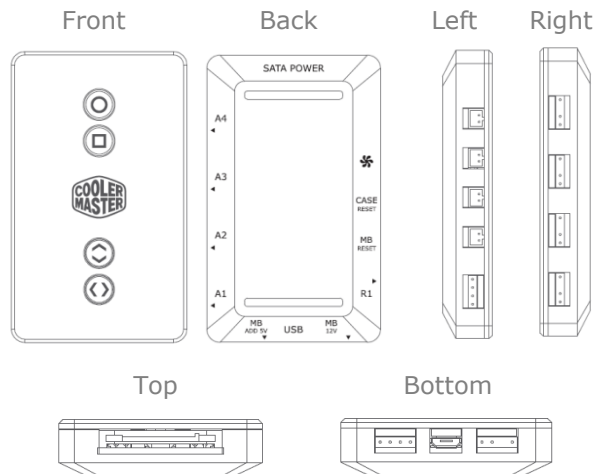


02. Left Side Functions

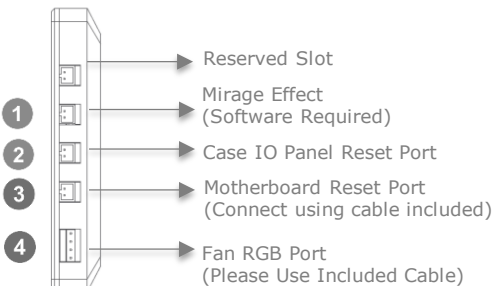


When ② & ③ Plugged in:
The Reset Button on the Case IO Panel can be used to switch between LED modes. Press and Hold for 5 secs to restart your computer


03. Bottom Functions

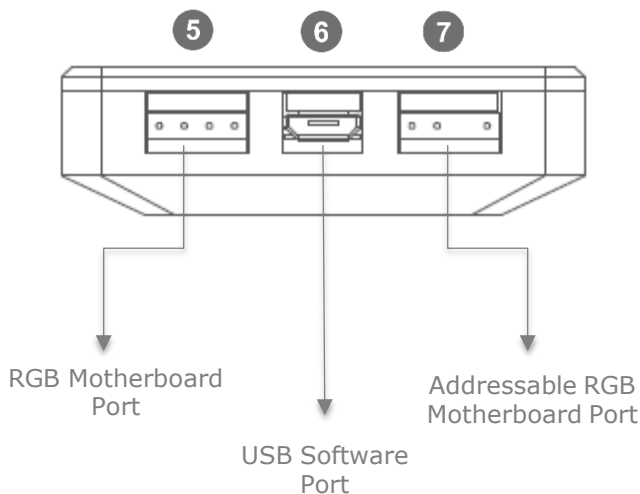


04. Right Side Function

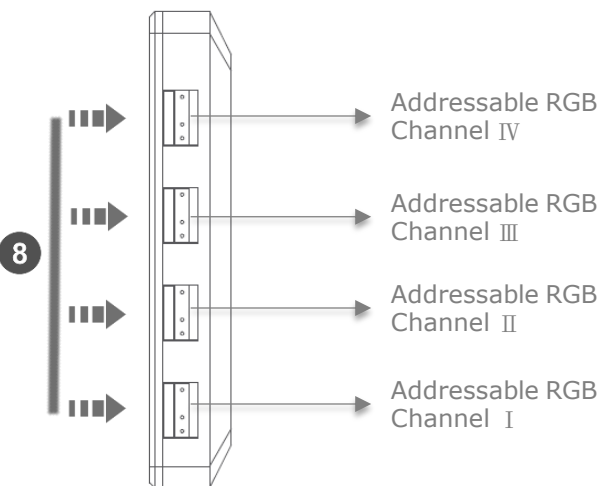

05. Top Function

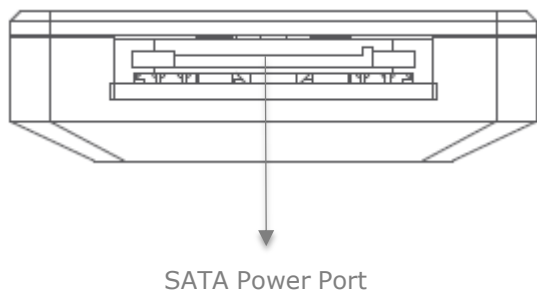


06. Wire Instruction (At Your Choice)

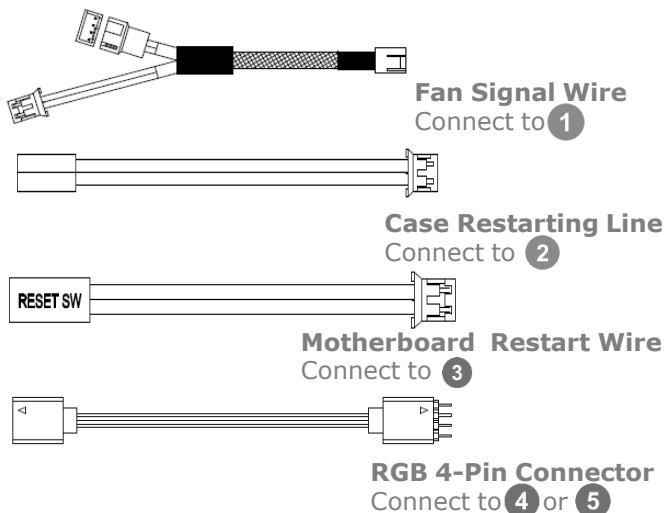




USER MANUAL

07. Wire Instruction (At Your Choice)



USB Header Connector

Connect to the motherboard USB port




USB Adapter

Connect to ⑥



ARGB 3-Pin Connector


Connect to ⑦ or ⑧



One to Three ARGB Connector

Connect to ⑧


08. Basic Installation Diagram

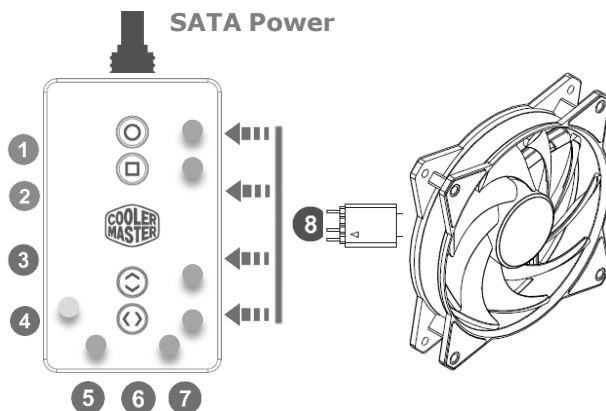


Note:

This basic connection method can control the light.


09. Key Function Description

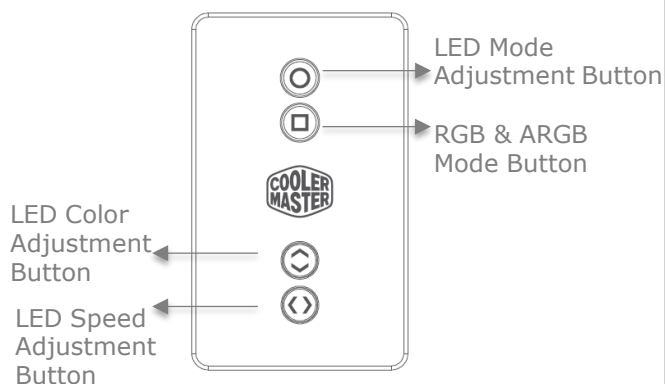


10. Addressable RGB/RGB Mode

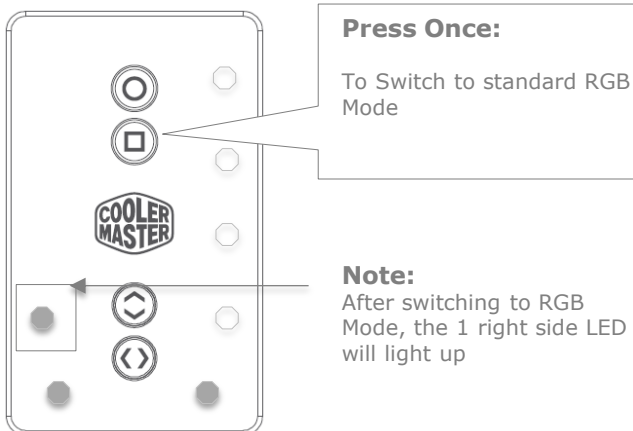

11. Addressable RGB/RGB Mode

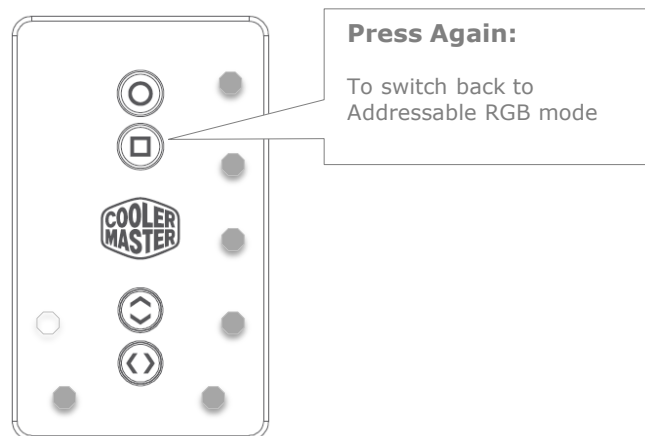

12. Warning

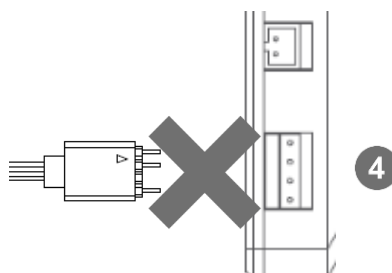

Note:

Do not connect the 3-Pin ARGB to the 4-Pin RGB Interface, which will damage the fan lighting effect.