



Actinic BL TL(-K)/TL-D(-K)

Actinic BL TL TL-D 15W/10 1SL/25

Tubular low-pressure mercury vapour fluorescent lamps

Product data

• General Information

Cap-Base	G13 [G13]
Main Application	Reprography
Life To 50% Failures (Nom)	8000 h
Useful Life (Nom)	5000 h

• Light Technical

Colour Designation	Actinic
Chromaticity Coordinate X (Nom)	222
Chromaticity Coordinate Y (Nom)	210

• Operating and Electrical

Power (Rated) (Nom)	15 W
Lamp Current (Nom)	0.34 A
Voltage (Nom)	51 V

• Approval and Application

Mercury (Hg) Content (Nom)	5.0 mg
----------------------------	--------

• UV

UV-B/UV-A (IEC)	0.2 %
UV-A Radiation 100Hr (IEC)	3.5 W

• Product Data

Order code	71093240
Full product code	871150071093240
Order product name	Actinic BL TL TL-D 15W/10 1SL/25
EAN/UPC - Product	8711500710932
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	928024801029
Net Weight (Piece)	59.600 g


Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and

remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

PHILIPS


Dimensional drawing

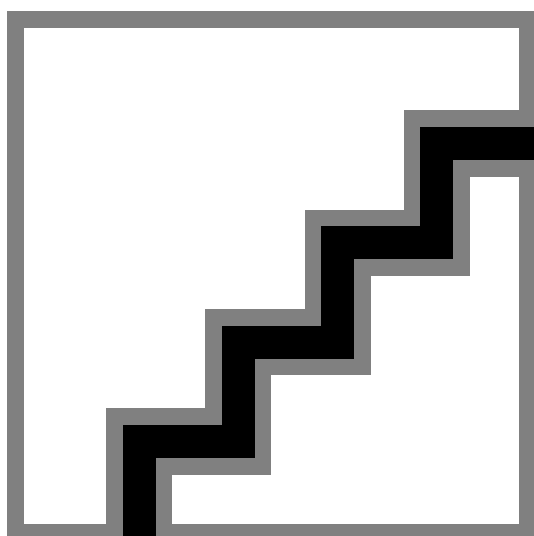



TL-D G13

TL-D 15W/10

Product	D	A	B	B	C
Actinic BL TL TL-D 15W/10 1SL/25	28 mm	437.4 mm	444.5 mm	442.1 mm	451.6 mm



Photometric data

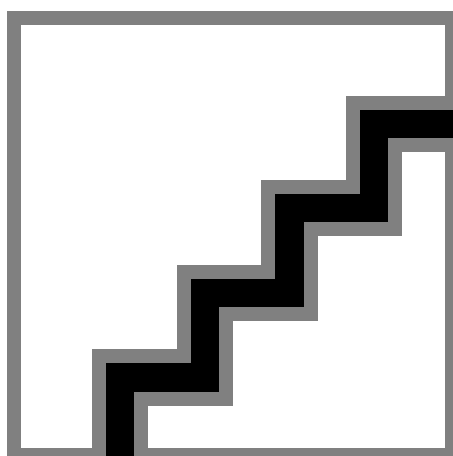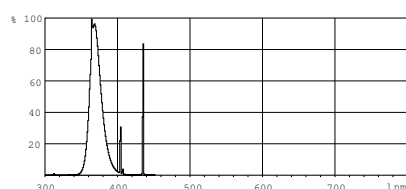

© 2015 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 10
data subject to change