

LEO Black 380-395 W

Premium PV Panel

The durable one.
For a green planet.



ELEGANT BLACK ROOF

Thanks to covered cross-connectors and improved cell connector optics, LEO Black is darker and looks more homogeneous.



GENERATE MORE POWER

Shows an extremely high resistance to degradation phenomena (PID & LeTID).



EXTREMELY WEATHER RESISTANT

Certified to withstand 8100 Pa Snowload & 3600 Pa Windload & 40 mm Hailstones (Hail-Class 4).



POWERFUL IN ALL ENVIRONMENTS

Certified to perform in coastal areas (salt-mist), deserts (dust) and farmland (ammonia).



MAXIMUM USE OF SPACE

LEO-Panels with 108 & 96 cells can be combined without add-ons. For maximum energy generation on the roof.



A SUSTAINABLE CHOICE

A premium product, which lasts for decades. Manufactured according to rigid environmental standards. Produced with 100 % green electricity.

MADE IN GERMANY!

Right here. In Prenzlau. In our production facility. Here we manufacture under the aspects of quality & durability since 2001.

FULL SERENITY



Years linear
Power Guarantee



Years
Product Warranty

100% cost recovery of guarantee claims.
Under the terms and conditions of the respective guarantee certificate.


QUALITY UNDER HAND AND SEAL



Design optimized with


SmartCalc.Module

aleo
www.aleo-solar.com

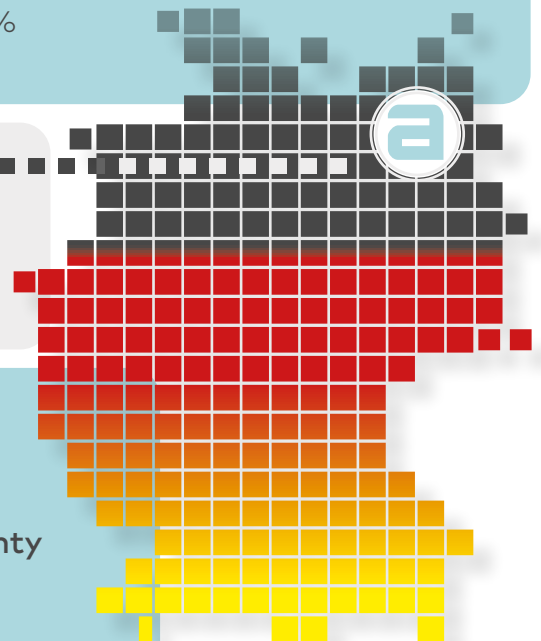

aleo solar panel LEO Black 380-395 W Premium

DIMENSIONS [mm]

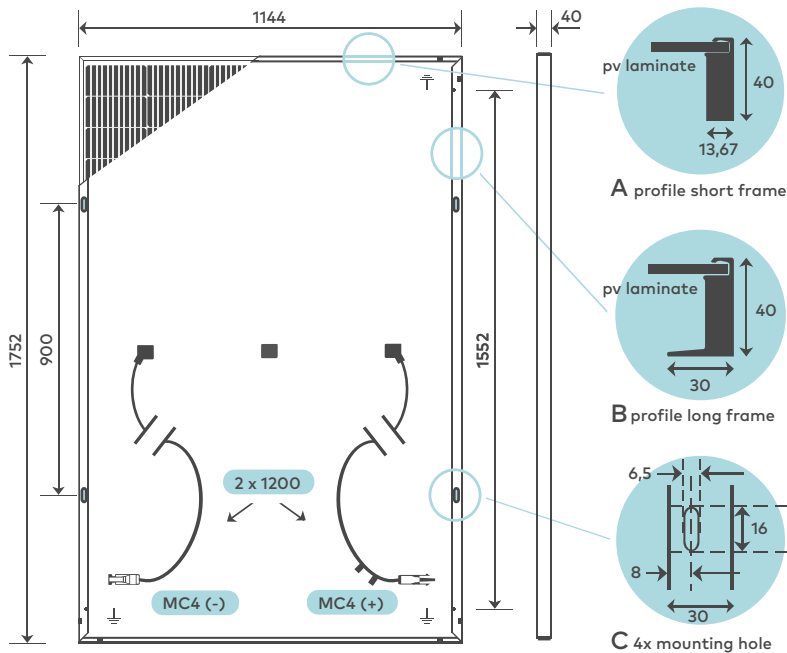

BASIC MODULE DATA

Length x width x height	[mm]	1752 x 1144 x 40
Weight	[kg]	22
Number of cells		108
Cell size	[mm]	182 x 91
Cell material		Monocrystalline Si, PERC
Number of Busbars		10
Front sheet		3.2 mm Solar glass (TSG)
Back sheet		Polymer sheet, black
Frame material		Al alloy, black

BASIC DATA JUNCTION BOX

3 parts junction box acc. to IEC 62790	[mm]	left & right: 62 x 58 x 14 middle: 49 x 55 x 14
Bypass diodes		3 (one per box)
IP class		IP68
Cable	[mm]	1200 (+), 1200 (-) acc. to EN 50618
Connectors		genuine MC4 acc. to EN 62852

ELECTRICAL DATA (STC)

	L84S380	L84S385	L84S390	L84S395	
Rated power	P_{MPP} [W]	380	385	390	395
Rated voltage	V_{MPP} [V]	31.02	30.21	31.40	31.60
Rated current	I_{MPP} [A]	12.26	12.34	12.42	12.50
Open-circuit voltage	V_{OC} [V]	36.93	37.05	37.17	37.29
Short-circuit current	I_{SC} [A]	12.85	12.94	13.02	13.10
Efficiency	η [%]	19.0	19.2	19.5	19.7

Electrical values measured under standard test conditions (STC): 1000 W/m²; 25 °C; AM 1.5

ELECTRICAL DATA (LOW IRRADIANCE)

	L84S380	L84S385	L84S390	L84S395	
Power	P_{MPP} [W]	73	74	75	76

Electrical values measured under: 200 W/m²; 25 °C; AM 1.5
Measurement tolerance of P_{MPP} under STC -3/+3 %
Accuracy of other electrical values -10/+10 %
Efficiency related to gross module area

CLASSIFICATION

Classification range (positive classification) [W] 0/+4.99

CERTIFICATIONS

- Fire Resistance Class C
- Protection Against Electric Shock II
- IEC 61215:2021, IEC 61730:2016 including:
 - IEC 62804 – PID Resistance
 - IEC/TS 62782:2016 - Dynamic mechanical load testing
- IEC 62716 – Ammonia Resistance
- LeTID Resistance
- IEC 61701 – Salt mist Resistance
- IEC 60068-2-68:1994 - Sand- and Dust test
- Hail resistance class 4 (40 mm hailstones)
- Snail trail free (AgNP Test)
- System Certifications acc. to DIN EN ISO 9001:2015, 14001:2015, 50001:2018 and DIN ISO 45001:2018

LOADS

Max. module pressure load (Testload)	[Pa]	8100 ¹
Max. module pressure load (Designload) ²	[Pa]	5400 ¹
Max. module suction load (Testload)	[Pa]	3600 ¹
Max. module suction load (Designload) ²	[Pa]	2400 ¹
Max. system voltage	V_{OC}	1000
Reverse current load	I_R [A]	25

Mechanical load acc. to IEC/EN 61215:2021
¹ Please observe the mounting conditions in the installation manual
² Testload/Safety factor 1.5 = Designload


TEMPERATURE COEFFICIENTS

Temperature coefficient I_{SC}	$\alpha (I_{SC})$	[%/K]	+0.03
Temperature coefficient V_{OC}	$\beta (V_{OC})$	[%/K]	-0.26
Temperature coefficient P_{MPP}	$\gamma (P_{MPP})$	[%/K]	-0.34

GUARANTEES

Product Guarantee	25 years
Power Guarantee	25 years – Linear

PERFORMANCE GUARANTEE

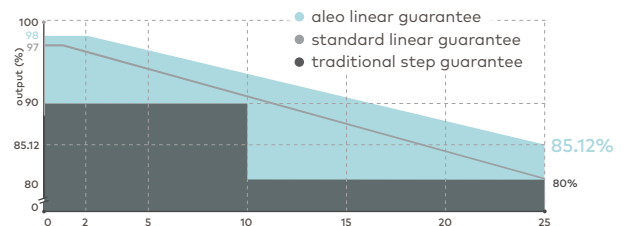

PLEASE CONTACT YOUR AUTHORISED ALEO DEALER

ALEO SOLAR GMBH

Marius-Eriksen-Straße 1
17291 PRENZLAU
GERMANY

CONTACT

+49 3984-8328-0
info@aleo-solar.com
www.aleo-solar.com