
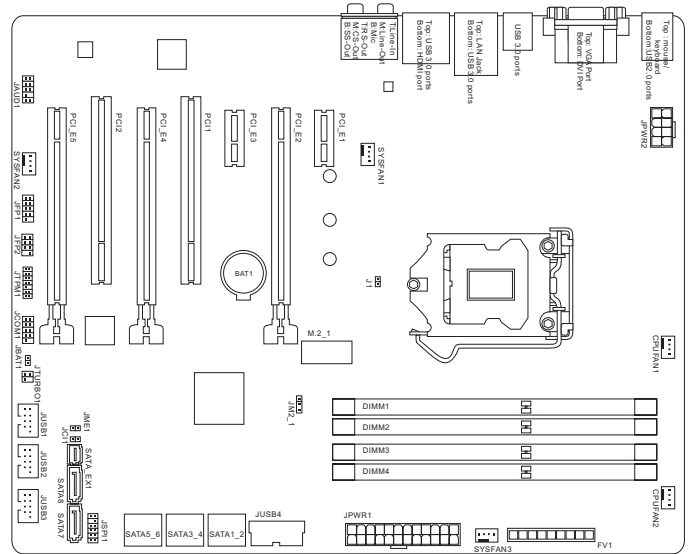


Z97S SLI PLUS

(MS-7930v.1.0)

ATX Motherboard

Supports 4th and 5th Generation Intel® Core™ Processors, and Intel® Pentium® and Celeron® Processors for Socket LGA1150

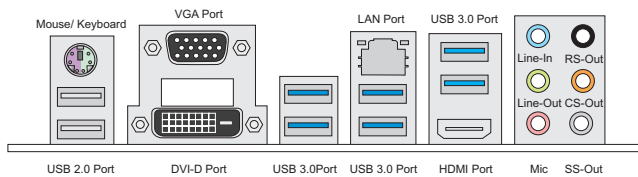

Motherboard Specification

Processor Support - Supports 4th and 5th Generation Intel® Core™ Processors, and Intel® Pentium® and Celeron® Processors for Socket LGA1150 Base Clock 100 MHz/125 MHz/167 MHz Chipset - Intel® Z97 chipset Memory Support - Support 4 DDR3 DIMMs 1066/ 1333/ 1600/ 1866(OC)/ 2133(OC)/ 2400(OC)/ 2666(OC)/ 2800(OC)/ 3000(OC)/ 3200(OC) or Higher with 22nm Haswell processors up to 32GB max - Supports Dual-Channel mode LAN - Supports LAN 10/100/1000 Fast Ethernet by Intel® i218 Audio - Chip integrated by Realtek® ALC892 - Flexible 8-channel audio with jack sensing - Compliant with Azalia 1.0 Spec SATA 6 SATA 6Gb/s (SATA1~SATA6) ports by Intel® Z97 2 SATA 6Gb/s (SATA7~SATA8) ports by Asmedia 1061 SATA Express Slot 1 SATA Express port by Intel® Z97 (switch from M.2) M.2 Slot - Support PCIE M.2 Storage by Intel® Z97 (switch from SATA Express) USB 3.0 8 USB 3.0 ports by Intel® Z97 (rear x 6, front x 2)	Connectors - Back panel 1 PS/2 mouse/ keyboard combo port 2 USB 2.0 ports 6 USB 3.0 ports 1 VGA port 1 DVI port 1 HDMI port 1 LAN port 6 flexible audio ports - On-Board 3 USB 2.0 connectors 1 USB 3.0 connector 1 Chassis Intrusion connector 1 Serial port connector 1 Front Panel Audio connector 1 TPM Module connector 1 V-Check points Slots 3 PCIE x16 slots 2 PCIE x1 slots 2 PCI slots Form Factor - ATX (304.8 x 243.8 mm) Feature on Focus - Click BIOS IV - M-Flash - PCIE 3.0 - SATA 6Gb/s - SATA Express - PCIE M.2 Storage Support - USB 3.0 - USB Safeguard 2 WAY SLI 3WAY CROSS FIRE Mounting 9 mounting holes
--	--

These specification is subject to change without prior notice.