


ALTHEA17B 3-Port 67W GaN USB-PD-Ladegerät mit USB-C- Ladekabel, USB-C x 2, USB-A x 1, QC 3.0, PPS

Product Images

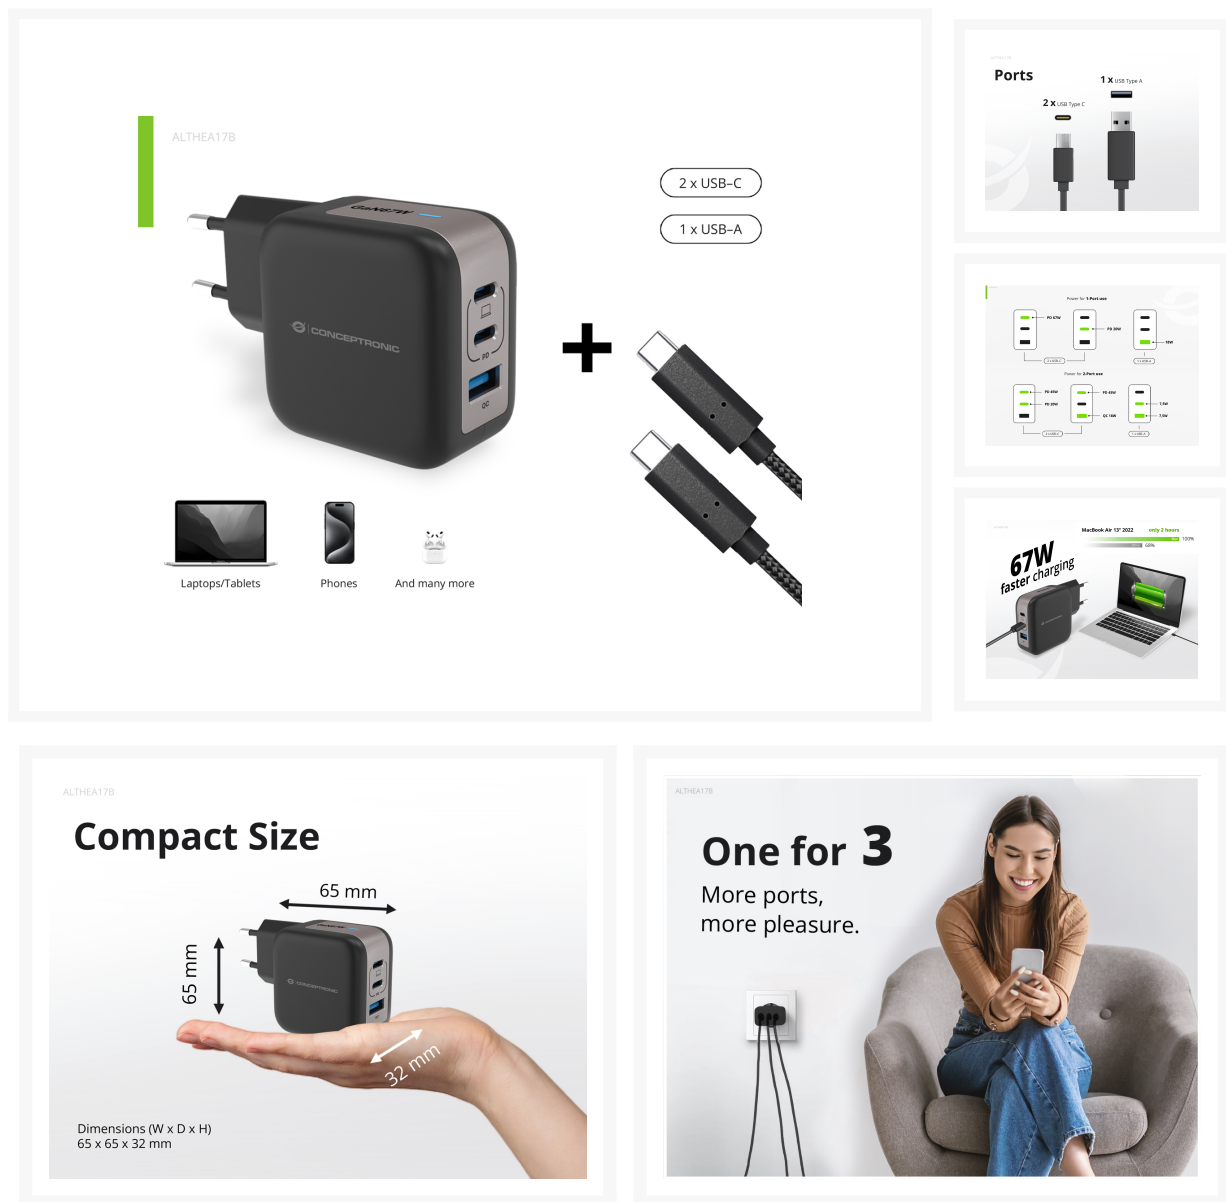

ALTHEA17B


Premium GaN-Technologie Your benefits:

- > GaN chargers are smaller
- > less heat during power transfer
- > more energy efficient



Power for 3-Port use

Conceptronic ALTHEA17B Charger charging instructions

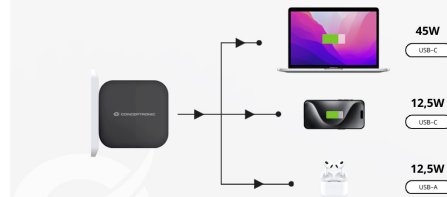

ALTHEA17B

Universal compability

Laptop



MacBook Pro



MacBook Air



Dell XPS 13

Tablet



iPad Pro / Air / Mini



Galaxy Tab S8 / S7 / A8

Smartphone



iPhone



HUAWEI Mate 60 Series



Galaxy



Google Pixel

And many more



AirPods / DJI / Canon / Gaming



Short Description

- USB-C 1 Ausgang: DC 5.0V/3.0A, 9.0V/3.0A, 12.0V/3.0A, 15.0V/3.0A, 20.0V/3.35A (PD); 3.3-11.0V/4.05A (PPS)
- USB-C 2 Ausgang: DC 5.0V/3.0A, 9.0V/2.22A, 12.0V/1.67A (PD); 3.3-11.0V/1.8A (PPS)
- USB-A-Ausgang: DC 5.0V/3.0A, 9.0V/2.0A, 12.0V/1.5A (QC 3.0)
- USB-C 1 + USB-C 2 + USB-A Ausgang: 45.0W (USB-C 1) + 5.0V/3.0A (USB-C 2 + USB-A)
- USB-Power-Delivery- (PD) 3.0-Technologie mit Schnellladefunktion
- Entspricht dem Programmable Power Supply (PPS) Standard zur Verbesserung der Ladeeffizienz und Reduzierung der Hitzeentwicklung
- Schutz gegen Überlastung, Kurzschluss und Überhitzung

- Enthält ein 1,5 m langes 3,0A USB-C zu USB-C Kabel

Description

Das USB-PD-Ladegerät bietet eine sichere, zuverlässige und komfortable zweite Stromversorgungslösung für Heim und Büro sowie eine vielseitige Option auf Reisen. Das Gerät eignet sich zudem ideal als Ersatz für beschädigte oder verlorengegangene Netzteile. Sie Erkennt automatisch die angeschlossenen Geräte und lädt diese mit bis zu 67W auf, wie z. B.: MacBook, Nintendo Switch, Samsung usw. Das Ladegerät ist geschützt gegen Überlastung, Kurzschlüsse und Überhitzung.

Additional Information

Cables included.	USB Type-C
Power Plug Type.	EU
USB Power Delivery revision	3.0
Number of outputs.	3
USB Type-A ports quantity.	1
Fast charging technology.	Quick Charge 3.0, Power Delivery 3.0, Programmable Power Supply (PPS)
USB Type-C ports quantity.	2
Programmable power supply (PPS) (YES/NO).	Ja
Material des Gehäuses	Polycarbonate (PC)
Number of simultaneously connected devices (max).	3
Port 1 Power Output.	USB-C1 output: DC 5.0V/3.0A, 9.0V/3.0A, 12.0V/3.0A, 15.0V/3.0A, 20.0V/3.35A (PD); 3.3-11.0V/4.05A (PPS)
Port 2 Power Output.	USB-C2 output: DC 5.0V/3.0A, 9.0V/2.22A, 12.0V/1.67A (PD); 3.3-11.0V/1.8A (PPS)
Port 3 Power Output.	USB-A output: DC 5.0V/3.0A, 9.0V/2.0A, 12.0V/1.5A (QC 3.0)
Länge des Kabels	150 centimeter
Code des Harmonisierten Systems (HS)	850440
Maximum AC Input.	240 volt
Minimum AC Input.	100 volt
Eingangsstrom	1.5 ampere
Maximum power.	67 watt
Power Protection Features.	Over current, Over power, Short circuit
Einhaltung der Nachhaltigkeit	Nein
Operating temperature (T-T) Max.	35 celsius

Operating temperature (T-T) Min.	0 celsius
Storage relative humidity (H-H) Max.	90%
Storage relative humidity (H-H) Min.	10%
Operating relative humidity (H-H) Max.	80%
Operating relative humidity (H-H) Min.	20%
Storage temperature (T-T) Max.	80 celsius
Storage temperature (T-T) Min.	-20 celsius
Tiefe des Pakets	36 millimeter
Höhe des Pakets	110 millimeter
Breite des Pakets	125 millimeter
Gewicht der Verpackung	29 gram
Zulassungen und Konformität	CE, ERP, RoHS
Inhalt des Pakets	Quick installation guide, USB cable (C-C)
Farbe	Schwarz
Modellnummer	ALTHEA17B
EAN	4015867236512
Produkt Höhe	32 millimeter
Produkt Breite	54 millimeter
Produkt Tiefe	54 millimeter
Produkt Gewicht	128 gram

