




POR-0222 2-Port Gigabit PoE-Plus Repeater, Cascadable, LevelOne

Product Images

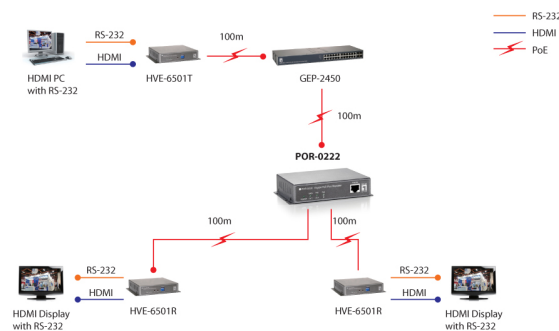

Short Description

1. High Power Midspan PoE compliant to simplify deployment and installation
2. Simple Plug and Play installation, no additional power supply required
3. Forwards 802.3af/802.3at/High-Power PoE to remote device
4. Extends Gigabit PoE connection for another 100 meters
5. Built-in 2 PoE ports for PoE devices
6. No additional power supply required
7. Simple Plug and Play installation

Description

Extend the reach of your Gigabit PoE-Plus devicesFor system integrators looking for a professional solution to help extend their Gigabit PoE (802.3af/at) network, POR-0222 is the perfect accessory to increase your network performance. As a 2-port repeater, it's now easier to add more devices to the network for greater deployment flexibility.Normal cable runs only reach 100 meters, but with POR-0222 installers can extend the PoE network performance up to 200 meters. Furthermore, you can triple your range or even more by daisy-chaining* multiple PoE repeaters.* Maximum distance depends on the required Wattage of the PD.Simple yet durable, no software requiredAs a Gigabit PoE-Plus Repeater, POR-0222 receives all power from the Power Sending Equipment (PSE), such as a Gigabit PoE-Plus switch. This means that POR-0222 uses no external power supply, making it the most flexible option for system integrators looking for an easy, affordable solution to increase the distance to the attached devices on a network. POR-0222 has 3 RJ-45 ports for easy deployment, 1 "IN" port that accepts the power and data for the first 100 meters, and 2 "OUT" ports that boosts and extends the power and data an additional 100 meters. With a durable metal housing, POR-0222 fits into any tight deployments.ApplicationsPOR-0222 is a long-ranged solution for deploying PoE IP Digital Signage and any Gigabit PoE PD powered by 802.3at Gigabit PSE.

Additional Information

Max. operating humidity (%)	95
Max. operating temperature (°C)	50
Min. operating humidity (%)	5
Indicators	Power, PoE In, PoE Out
Mount	Wall mount
Standards	IEEE 802.3 10Base-T, Ethernet IEEE 802.3u 100Base-TX, Fast Ethernet IEEE802.3ab 1000Base-T, Gigabit Ethernet IEEE 802.3x Ethernet Flow Control
Product weight (kg)	0,4
Product breadth (mm)	130
Product depth (mm)	90
Product height (mm)	28
Color	Grey
EAN	4015867185629
Model number	POR-0222
Package contents	POR-0222 Quick Installation Guide
802.3af/at PoE	2

