
Inserts for flush-mounted switch ranges
Key Switch Insert
breaking circuit, 1-pole

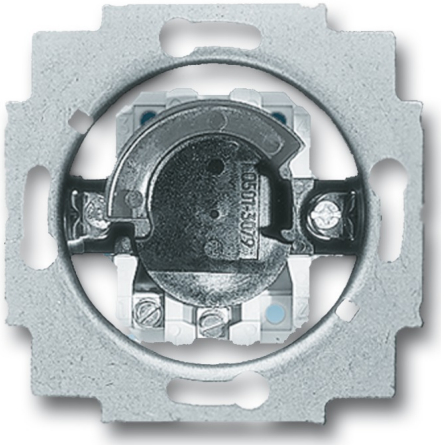

For profile semi-cylindrical lock.
In switched-on and switched-off status the key can be pulled out in the central position, respectively.
Delivered without cylindrical lock.

Rated voltage: 250 V~,
Rated current: 10 AX
For installation on British Standard wallboxes please use adapter plate APBS (6599-0-2813). (Depth of box 60 mm.), Use the cylindrical lock according to the enclosed drawing., See profile semi-cylindrical lock.

Order Code : 2CKA001101A0914
Article No. : 2733 USL-101
EAN: 4011395861400