




DATASHEET

Network Cabinet OFFICE 18U, 600x800 mm, RAL7035

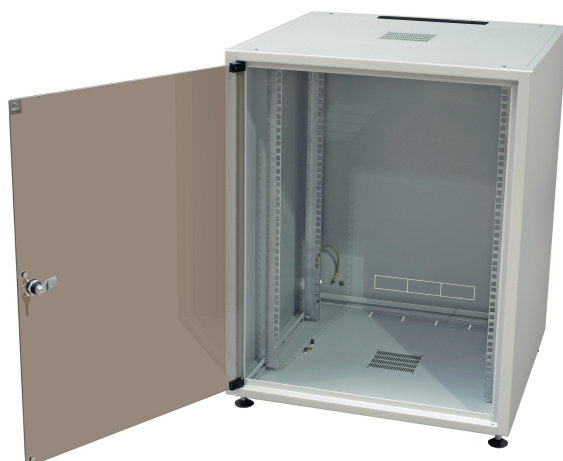

General data

19" network cabinet according to DIN41494
 Steel sheet housing, self-supporting, completely pre-assembled, self-ventilated
 Inside front and rear 4 x 19" profiles (2 front, 2 rear-sided), galvanised, step-less depth-adjustable
 Front door full glass, 1-part (thickness 4 mm)
 Front door with 1-point latch-locking
 Door stop possible left or right-sided
 Bottom and rear with pre-punched openings for cable entry (ca. 245 x 25 mm)
 Roof and bottom prepared for accommodation of 1 x fan unit (Art.-No. 691664)
 Internal earthing of all cabinet sections
 Paint finish RAL7035, light grey / RAL9005, jet black
 • Max. load 12U 30 kg, 15U 38 kg, 18U 45 kg
 Protection degree IP20
 Included in delivery: 1 x brush, 4 x leveling feet M8, 2 x key
 Delivery in transport packaging on disposable pallet

Technical properties

Cabinet Series	Office
Degree of protection	
Demountable	
Material	

This datasheet was created automatically on 11-09-2025 . Technical changes reserved.



DATASHEET

Network Cabinet OFFICE 18U, 600x800 mm, RAL7035

Modular spacing	
Mounting level	
Surface finishing	
Toolless depth adjustment	False
Type of back door	Rear wall
Type of front door	Full glass door 1-part
Type of profile rail	
Type of ventilation	
With backside door	
With earthing	
With front door	
With roof plate	
With sidewall	
With socket	

Available variants

ArtNr.	Bezeichnung	Color	Depth	Max. load capacity	Number of height units	Width	Höhe	RAL-Nummer	Anzahl der Türen
OFF-1568GR.V1RW	Network Cabinet OFFICE 15U, 600x800 mm, RAL7035	grey	800 mm	38 kg	15 HE	600 mm	737 mm	7035	1
OFF-1868GR.V1RW	Network Cabinet OFFICE 18U, 600x800 mm, RAL7035	grey	800 mm	45 kg	18 HE	600 mm	871 mm	7035	1

This datasheet was created automatically on 11-09-2025 . Technical changes reserved.

