



PN NXURVX650BZ
EAN 8436532166952

URANO VX650W

FEATURES

- ATX power supply with active PFC
- 80 PLUS Bronze Certificate: up to an 85% efficiency guaranteed
- Supports ATX12V v2.4 / 2.3 / 2.2 / 2.01
- Eco friendly: RoHS and ERP 2013 directives complied
- OVP, OPP, SCP, UVP protections
- Flat extra long cables
- 120 mm ultra silent fan with PWM control
- +12V single rail
- Dimensions: 150 x 140 x 85 mm | Net weight: 1.42 Kg



PN NXURVX750BZ
EAN 8436532166969

URANO VX750W

FEATURES

- ATX power supply with active PFC
- 80 PLUS Bronze Certificate: up to an 85% efficiency guaranteed
- Supports ATX12V v2.4 / 2.3 / 2.2 / 2.01 & EPS 12V 2.92
- Eco friendly: RoHS and ERP 2013 directives complied
- OVP, OPP, SCP, UVP, OPT, +3.3V & +5V OCP protections
- Flat extra long cables
- 140 mm ultra silent fan with PWM control
- +12V single rail
- Dimensions: 150 x 160 x 85 mm | Net weight: 1.95 Kg



PN NXURTX850BZ
EAN 8436532166976

URANO TX850W

FEATURES


- ATX power supply with active PFC
- 80 PLUS Bronze Certificate: up to an 85% efficiency guaranteed
- Supports ATX12V v2.4 / 2.3 / 2.2 / 2.01 & EPS 12V 2.92
- Eco friendly: RoHS and ERP 2013 directives complied
- OVP, OPP, SCP, UVP, OPT, +3.3V & +5V OCP protections
- Flat extra long cables
- 140 mm ultra silent fan with PWM control
- +12V single rail
- Dimensions: 150 x 160 x 85 mm | Net weight: 2.3 Kg

CONNECTORS




ATX MB

20+4 pin
1 unit
60 cm




EPS+12V

8 (4+4) pin
1 unit
60 cm




PCI Express *

6+2 pin
1 unit, 60 cm
1 unit, 75 cm



SATA

2 units, 60 cm
2 units, 75 cm
2 units, 90 cm



Molex 4 pin

1 unit, 60 cm
1 unit, 75 cm
FDD 1 unit, 90 cm

VOLTAGES

650W	AC INPUT		200-240 Vac, 47-63 Hz, 3.5A				
	DC OUTPUT		+3.3V	+5V	+12V	-12V	+5VSB
	Max. Output Current		20A	20A	50A	0.3A	2.5A
	Max. Combined Wattage		120W		600W	3.6W	12.5W
	Maximum Power		650W				

750W	AC INPUT		200-240 Vac, 47-63 Hz, 5A				
	DC OUTPUT		+3.3V	+5V	+12V	-12V	+5VSB
	Max. Output Current		25A	25A	62A	0.5A	3A
	Max. Combined Wattage		130W		744W	6W	15W
	Maximum Power		750W				

850W	AC INPUT		200-240 Vac, 47-63 Hz, 6A				
	DC OUTPUT		+3.3V	+5V	+12V	-12V	+5VSB
	Max. Output Current		25A	25A	70A	0.5A	3A
	Max. Combined Wattage		130W		840W	6W	15W
	Maximum Power		850W				




80 PLUS BRONZE
CERTIFIED
POWER SUPPLY



* TX 850W: 2 units, 60 cm / 2 units, 75 cm

EFFICIENCY 230V

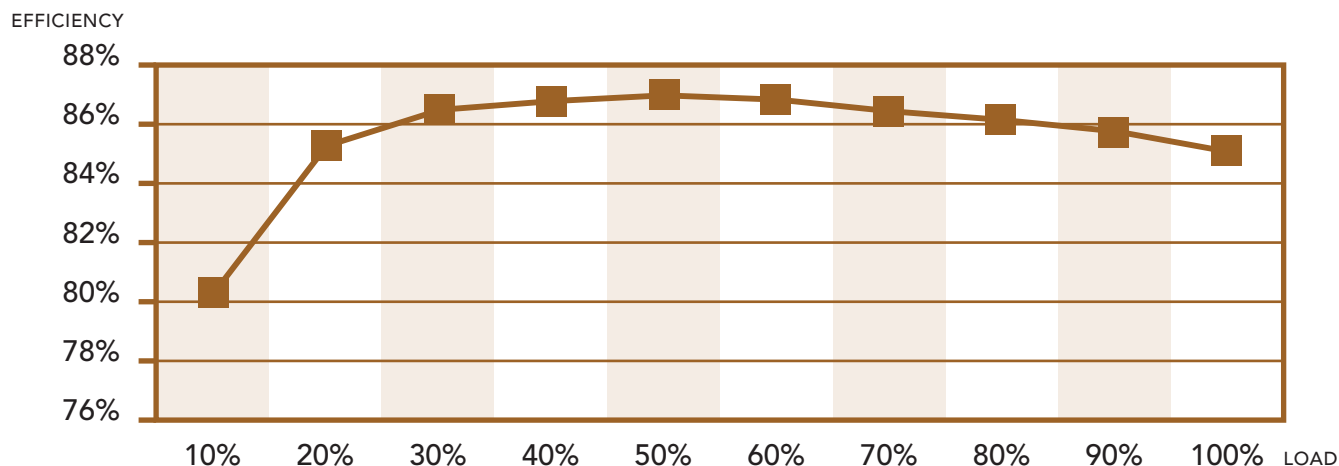



A large, dark, stylized logo resembling a shield or a stylized letter 'N' with a circular cutout in the center. It serves as a background for the main text.

nox

URANO

nox

nox-xtreme.com