


Connect Pro Series User Manual

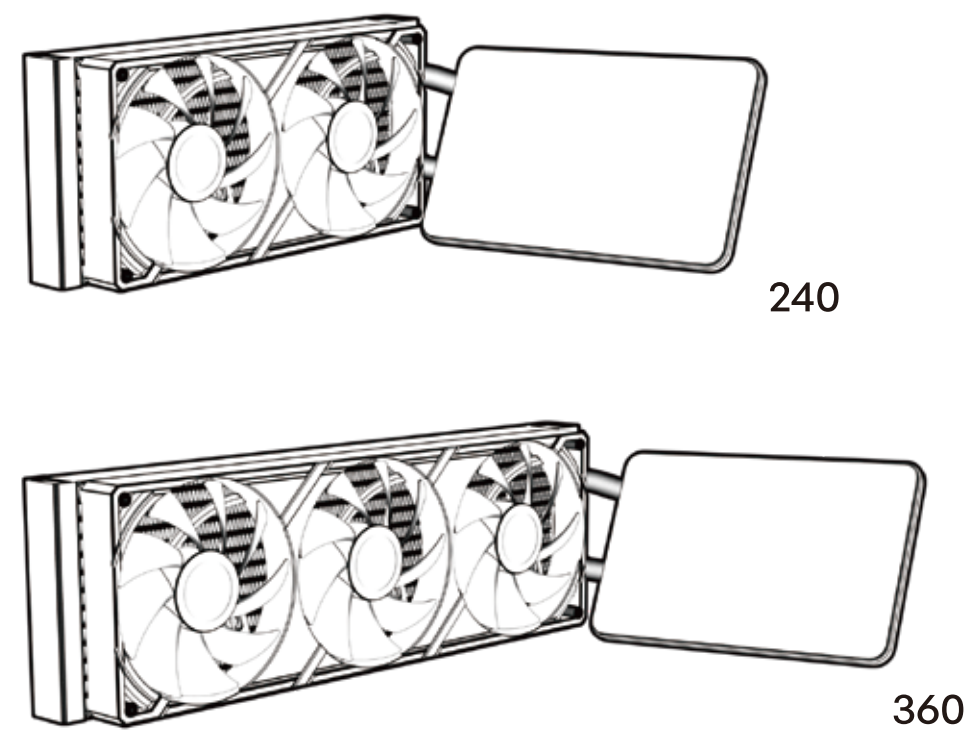

Pump Head

7" Multi Display LCD Panel

Pump Head Logo Metal Plate

or

Diagram showing the pump head assembly with a curved arrow indicating the transition from the LCD panel to the pump head.

Step.2 (1851/1700/1200/115X)

Diagram showing the installation of the pump head onto the motherboard. A screwdriver is shown at the top left. The pump head is being lowered onto the motherboard. Screws are shown being inserted into the pump head. A bracket is shown at the bottom right. A diagram shows the pump head being inserted into the motherboard socket, with a note: 1200 /115X ↔ 1851 /1700.

Connect Pro Series Accessories

for Intel

for AMD

for Intel & AMD

Accessories list:

- Connect Pro 360 Liquid Cooler x1
- Connect Pro 240 Liquid Cooler x1
- Pump Head Logo Metal Plate x1
- x1 Intel Backplate
- x4 Intel Stud Bolt
- x4 Intel 20XX Screws
- x1 AMD Bracket
- x5 AMD Bracket Screws
- x8 (240) x12 (360) Case Screws
- x4 Thumb Screws
- x1 Thermal Paste
- x1 Mini ARGB LED Controller

Intel

Step.1


Diagram showing the installation of the Intel backplate onto the motherboard. A screwdriver is shown at the top left. The backplate is being inserted into the motherboard socket. A warning label is shown: Warning! Remove before installation.

Step.2 (20XX)


Diagram showing the installation of the pump head onto the motherboard. A screwdriver is shown at the top left. The pump head is being lowered onto the motherboard. Screws are shown being inserted into the pump head. A bracket is shown at the bottom right.

AMD (AM5/AM4)


Step.1

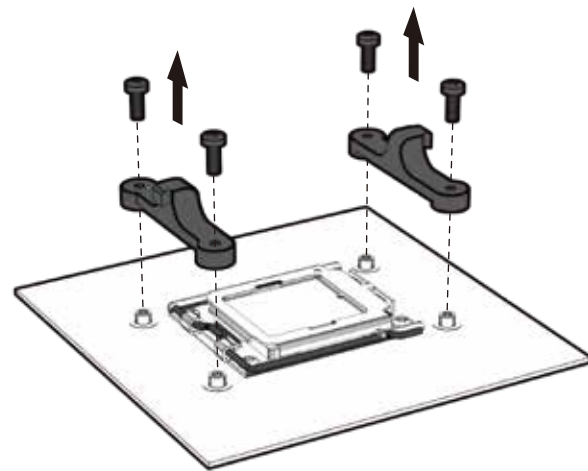


Step.2

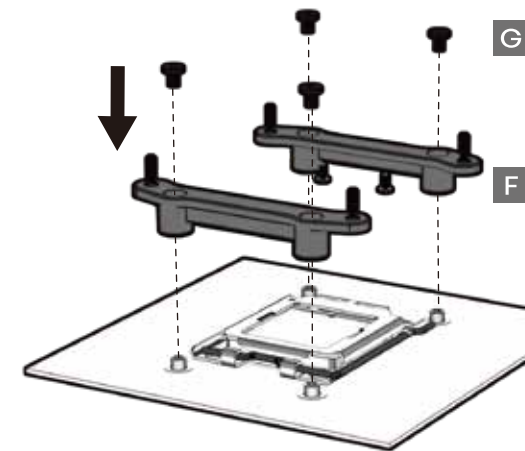


Step.3

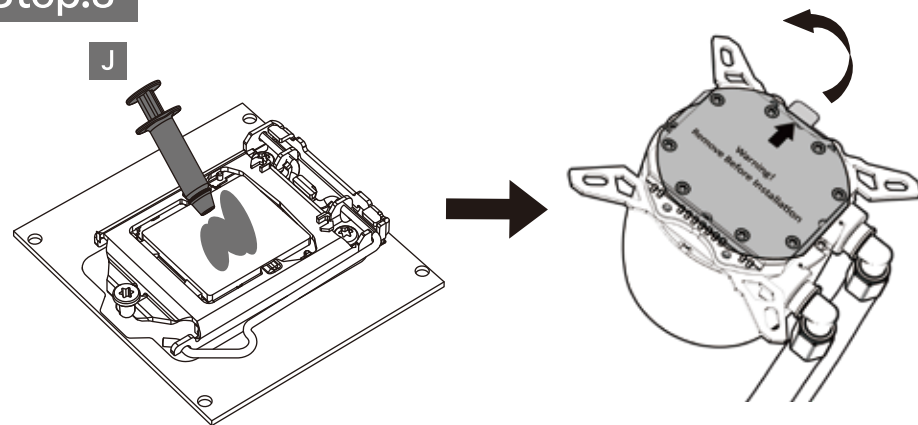

Step.4

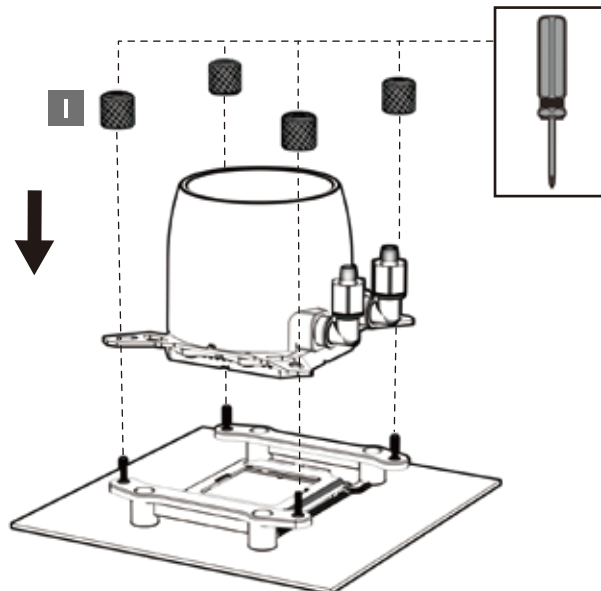


Connect Cables

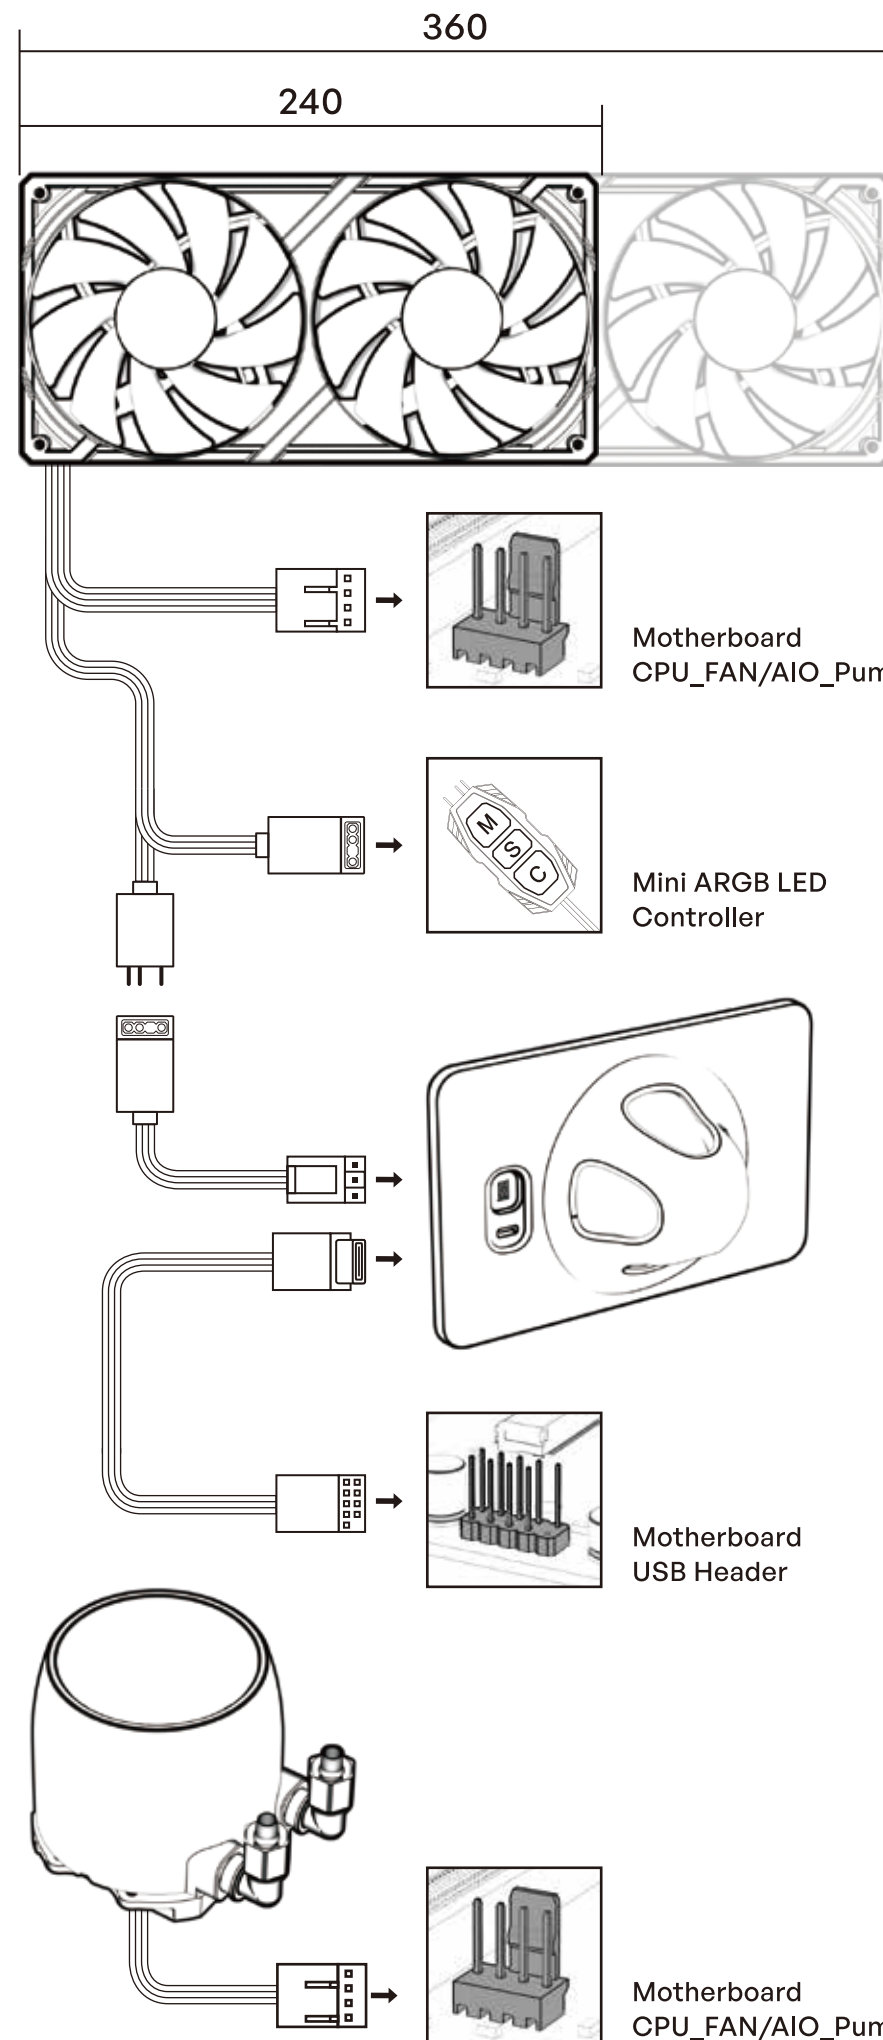

Mini ARGB LED Controller

Please Connect the 3Pin ARGB Connector to Mini ARGB LED Controller, Plug and Play.

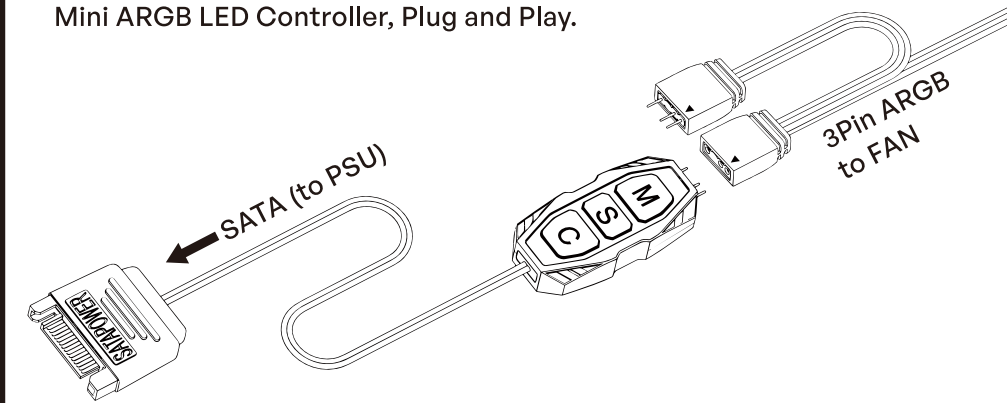

M

Multiple Lighting Effect Mode

Click M Button to Switch Different LED Lighting Effects (9 Lighting Effects)

M

S

LED Speed Adjustment

Click M button to Enter Multiple Lighting Effect Mode
Click S Button to Change LED Speed (5 LED Speeds Available)

S

C

LED On/Off

Click S Button and Hold More than 2 Seconds for LED Off
Click M or C Button for LED On

C

LED Single Color Mode


Click C Button to Switch Different LED Single Color (7 Colors Available)

C

S

LED Brightness Adjustment

Click C Button to Enter LED Single Color Mode
Click S Button to Adjust LED Brightness (4 Brightness Modes)

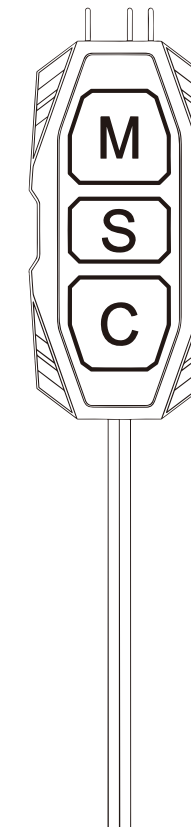

Connect Pro Display Software



Software Download

XIGMATEK is Registered Trademark of Xigmatek Co., LTD.
© Copyright 2025-2029 All Rights Reserved
XIGMATEK Co., Ltd.
www.xigmatek.com sales@xigmatek.com