

ELC-LTXTR360

LIQTECH XTR

LIQTECH XTR



- *Workstation-level Compatibility with 550W+ Cooling Capacity*
- *Designed for AMD Ryzen™ Threadripper™ PRO (socket sTR5) and Intel® Xeon® W & Scalable (socket LGA 4677) Processors*
- *Ultra-premium Water Block Featuring Addressable RGB Lighting*
- *Equipped with High-Performance Silent Flow Fan*
- *Magnetic Rotatable Real-time Status Digital Display*




Features

- 100% AMD Ryzen™ Threadripper™ PRO & Intel® Xeon® W / Scalable IHS Coverage
 - 100% cover integrated heat spreader (IHS) of both AMD Ryzen™ Threadripper™ PRO & Intel® Xeon® CPU
- Silent Dual-ball Bearing Fan (Silent Flow) with a Voltage Reduction Wire
 - Newly designed silent fan blades combined with high-quality dual-ball bearing
 - Speeds up to 3000 RPM, providing strong airflow for quicker heat exchange
 - Includes a voltage reduction cable (2400 RPM) for noise reduction, optional installation
- Patented SCT(Shunt Channel Technology) Design
 - Shunt-Channel Technology (SCT) design shortens the coolant flow path, resulting in faster heat transfer.
- Magnetic Rotatable Real-time Status Digital Display
 - Real-time monitoring of CPU and GPU temperatures and fan speeds, with software control and alarm settings
 - Magnetic, 360-degree rotatable display design to meet all display needs
- Flexible Installation
 - The 115-degree nozzle head allows users to rotate the water block for unrestricted water pipe installation.
- Low-profile Lighting Design on Water Block
 - Support addressable RGB lighting synchronization through motherboard software




Workstation-level Compatibility with 550W+ Cooling Capacity

100% coverage of AMD Ryzen™ Threadripper™ PRO (socket sTR5)
and Intel® W / Scalable (socket LGA 4677) CPU surfaces.

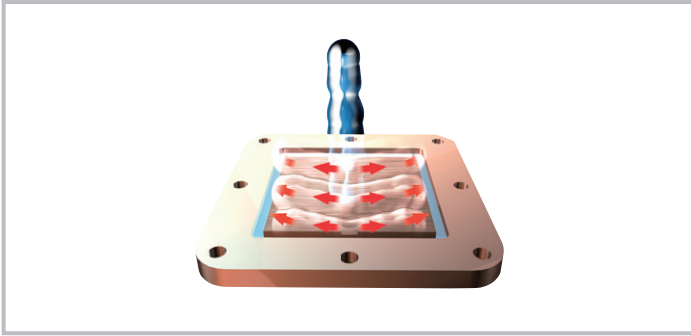

Patented Cooling Innovation

Central Coolant Inlet (CCI) Design and Patented Shunt-Channel Technology (SCT).

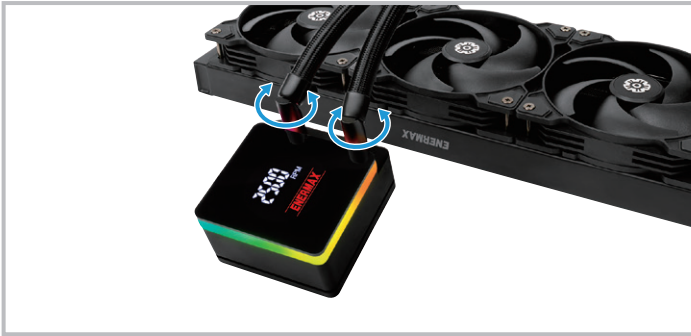

Flexible Installation

The 115-degree nozzle head allows users to rotate the water block for unrestricted water pipe installation.



ENERMAX Silent Flow Fan with Dual-ball Bearing Technology and a Voltage Reduction Wire

Featuring industry-grade dual-ball bearings and the silent blade design, Silent Flow fan achieves up to 3000 RPM for maximum airflow with minimal noise.



Magnetic Rotatable Real-time Status Digital Display

This innovation features real-time monitoring of CPU and GPU temperatures and fan speeds, complete with software control and alarm settings, all showcased on a magnetic, rotatable display to meet all your viewing needs.




Low-profile Lighting Design on Water Block

Support addressable RGB lighting synchronization through motherboard software.

Dimension

unit : mm

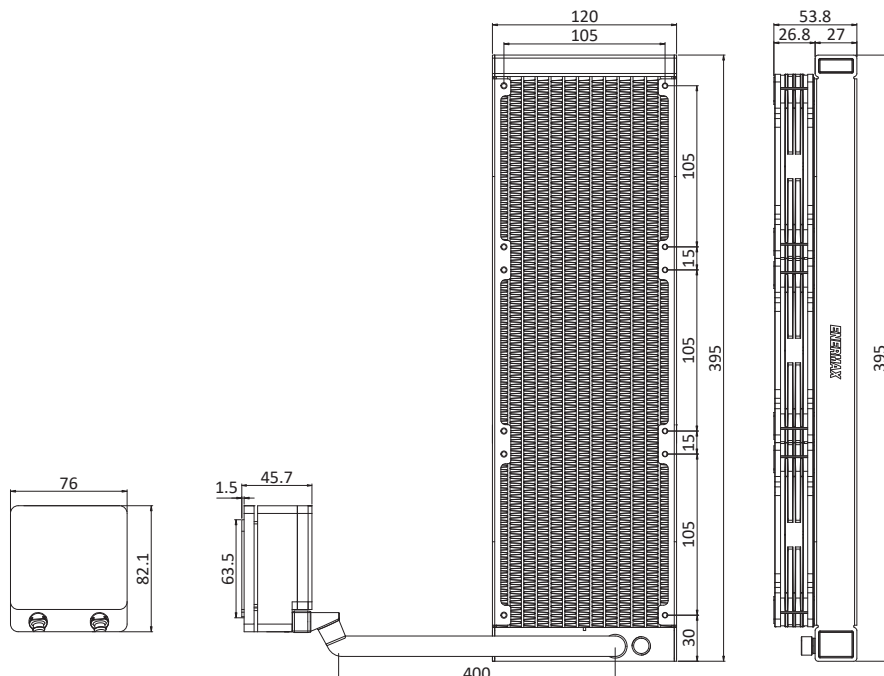

Model		ELC-LTXTR360
CPU Socket		Intel® LGA 4677 AMD® TR5 (sTR5/ sTRX5/ sWRX9), SP6, sWRX8 / sTRX4 / TR4 / SP3
Radiator Dimension		395 x 120 x 27mm
Tube Length		400mm
TDP		550 W+
Material	Cold Plate	Copper
	Radiator	Aluminum
	Tube	Rubber
Water Block Pump	Speed	700 - 3000 RPM $\pm$ 10%
	Bearing	Ceramic Nano PI Bearing
	MTBF	$\geq$ 100,000 hrs
	Rated Voltage	12V
	Rated Current	0.4A
	Rated Current-RGB LED	0.24A
Fan	Dimension	120 x 120 x 26.8mm
	MTTF	$\geq$ 100,000 hrs
	Speed	500 - 3000 RPM $\pm$ 10% 2400 RPM $\pm$ 10% (w/ noise reducer adaptor)
	Bearing	Dual Ball Bearing
	Rated Voltage	12V
	Rated Current	0.29A
	Air Flow	87.9 CFM 76.4 CFM (w/ noise reducer adaptor)
	Static Pressure	3.83 mm-H2O 2.96 mm-H2O(w/ noise reducer adaptor)
	Noise Level	32 dBA 26 dBA (w/ noise reducer adaptor)
	Connector	4 Pin PWM
Thermal Grease		Dow Corning® TC-5888
Logistic information		
Barcode	EAN: 4713157728838	
	UPC: 819315028834	
Box Dimension		443 x 210x 139.5 mm
Gross Weight / unit		2.8 kg
Carton Dimension		462 x 310 x 450 mm
Q'ty / carton		4 pcs
Gross Weight / Carton		12.7 kg