


333318 12-Outlet C13 Power Distribution Unit with Switch, Aluminum, 10A

Product Images



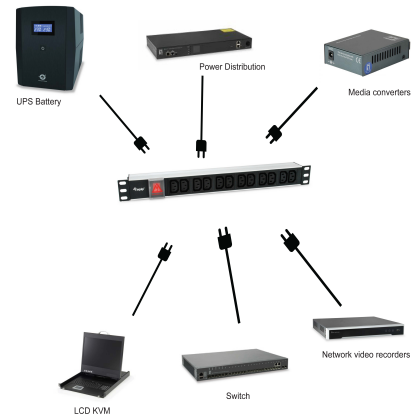

4x



4x



4x

Short Description

- **PDU Type:** 12-Outlet High-Density Rack PDU.
- **Power Rating & Capacity:** 250V, 10A, Max. 2500W.
- **Outlet Configuration:** 12 x IEC 60320 C13 Sockets.
- **Physical Build & Installation:** 1U Horizontal installation with Aluminum Shell.
- **Switch & Indicators:** Integrated Power ON/OFF switch.
- **Cable Specifications:** H05VV-F 3G 1.5 mm² x 1.8m with 90° Angled Plug.
- **Input Specification:** Universal 250V 50/60Hz AC.

Description

The equip® 333318 12-Outlet PDU is an extreme-density power solution designed to

solve the outlet scarcity problem in professional 19-inch cabinets. By providing 12 dedicated C13 sockets in a single 1U horizontal unit, it allows for the synchronized powering of a full fleet of computers, monitors, and networking peripherals, effectively centralizing your energy management.

This PDU is optimized for high-intent IT environments where efficiency and organization are paramount. The integrated master ON/OFF switch provides convenient control over total power consumption, while the 90° angled Schuko plug and 1.8m cable ensure a clean installation that maintains signal integrity even in congested rack spaces.

Built with a sturdily-constructed Aluminum shell, the 333318 offers superior heat dissipation and long-lasting durability. It serves as a reliable and professional interface for diverse electronic equipment, delivering a stable 2500W power flow that meets the rigorous standards of modern server rooms and professional workspaces.

Additional Information

Programmable power supply (PPS) (YES/NO).	No
Harmonized System (HS) code.	853710
Customs product code (TARIC).	8537109899
Shell material.	Aluminum
Outlets.	IEC C13 Outlets
Plug type.	Schuko CEE7/7 90° Angled
Color.	Black
EAN.	4015867238554
Model Number.	333318
Cable Length.	1.8m
Dimensions (W x D x H).	483 x 44.4 x 44.4 mm
Product weight (kg).	0.79
Mount.	19" rack mount
Power input.	220-240V 50/60Hz
Approval and Compliance.	CE & RoHS
Package Contents.	12-Outlet C13 Power Distribution Unit Quick Installation Guide Screws Kits

