


# 4-Port ATA G504



The VoIP analogue adapter supports four analogue ports with different SIP lines

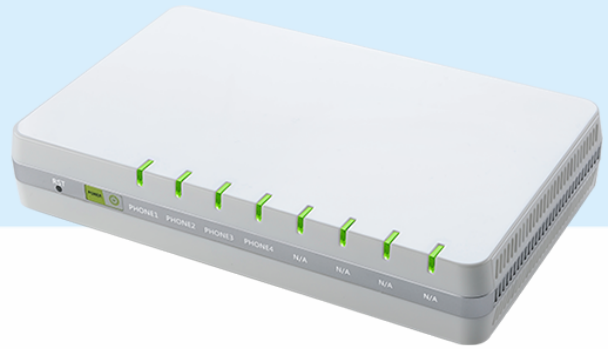

- Standalone VoIP analogue adapter with 4 ports
- 1 x GBit WAN and 1 x GBit LAN port with NAT functions
- Support for various audio codecs and fax modes
- Support for SIPs and SRTP

## Your advantages in detail

The G504 VoIP analogue adapter from Flyingvoice is used to operate four analogue devices (telephone, fax, door station, etc.) on a VoIP connection. It does not matter whether the adapter is fed directly with the SIP access data from the telephone provider or the login data of an extension from a VoIP-capable telephone system. All analogue ports can be set up independently of each other. The G504 has been tested and a basic configuration has been created

for operation on a COMtrexx. This basic configuration is automatically downloaded during commissioning and activated after a restart. Only the SIP access data needs to be entered.

The prerequisite for the standalone configuration is unrestricted access to the Internet. When operating on a PBX, port releases and prioritisation of voice packets must be observed in the local network.

In addition to the voice codecs, the following fax standards are supported: T.38, T.30 and G.711

# Features at a glance

## PERFORMANCE CHARACTERISTICS

- Four analogue ports for connecting telephones, fax machines, door intercoms, etc.
- Includes one WAN port and one LAN port with 1 GBit each
- In addition to the power LED, a status LED is integrated for each of the four FXS ports
- The adapter can function as an independent VoIP gateway without a PC or telecommunication system

## SUPPORTED VOIP CODECS

- G.711(a/μ), G.729A/AB

## SUPPORTED PROTOCOLS

- T.30 Fax with G.711, Real time Fax over IP via T.38
- SIP secure / SIPS (N2C 1, N2C 2, RC4)
- Secure RTP / SRTP (N2C 1, N2C 2, CallID-XOR)

## MANUFACTURER

- Flyingvoice Network Technology Co., Ltd.  
Shenzhen, China

## COMPATIBLE PRODUCTS

- 90024 / COMtrexx® Flex

- 90027 / COMtrexx® Next
- 90023 / COMtrexx® Advanced
- 90022 / COMtrexx® Business
- 90021 / COMtrexx® VM

## TECHNICAL SPECIFICATIONS

### I/O Interface

- WAN port: 1 x RJ-45, 1000 Mbit/s
- LAN port: 1 x RJ-45 1000 M
- FXS ports: 4 x RJ-11
- AC/DC adapter: Input AC 100 – 245 V, Output DC 12 V, 2 A

### General

- Dimensions (l x w x h): 180 mm x 110 mm x 30 mm
- Weight: 275 g
- Conformity: CE, RoHS

## DELIVERY

- 4-Port ATA G504
- Quick-start guide
- Power supply unit
- Network cable RJ-45
- Connection cable RJ-11

## ORDERING INFORMATION

Designation: 4-Port ATA G504

Article number: 90089

EAN Code: 6973110730201