
# N 70, GAS HOB, 60 CM, STAINLESS STEEL
# T26DS59N0

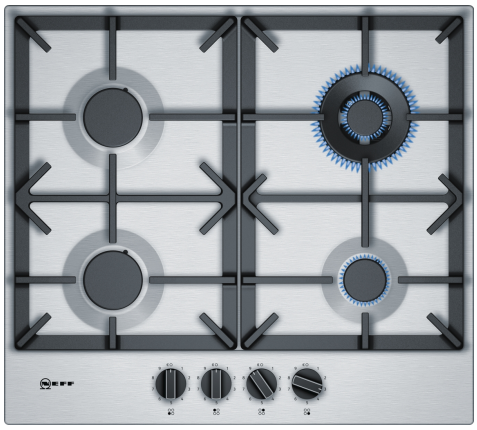

The gas hob with a stainless-steel surface design and adjustable FlameSelect.

| | |
|---|---|
| Z2480X0 | Simmer plate |
| Z32SE10X0 | Small pot support |
| Z32SW10X0 | Wok ring |

Product name/family: .....gas hob w integrated controls
Built-in / Free-standing: ..... Built-in
Energy input: ..... Gas
Number of cooking zones: ..... 4
Type of control setting devices: .....sword knobs
Required niche size for installation (HxWxD): .....45 x 560-562 x 480-492 mm
Width of the appliance: .....582 mm
Dimensions: ..... 53x582x520 mm
Dimensions of the packed product (HxWxD): . 141 x 651 x 578 mm
Net weight: ..... 11.4 kg
Gross weight: .....12.3 kg
Residual heat indicator: .....without
Location of control panel: .....Front
Basic surface material: ..... Stainless steel
Color of surface: .....Stainless steel
Length electrical supply cord: ..... 100.0 cm
EAN code: .....4242004203438
Gas connection rating: .....8000 W
Fuse protection: .....3 A
Voltage: .....220-240 V
Frequency: .....60; 50 Hz

4 242004 203438

# N 70, GAS HOB, 60 CM, STAINLESS STEEL
# T26DS59N0

Design
- Stainless steel surface
- black cast iron pan supports with protective rubber feet

Usage convenience
- FlameSelect with 9 steps: precisely control and adjust the flame in nine defined levels.
- Design co-ordinated control dials: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

Burners and power
- 4 burner hob
- Left front: Standard burner up to 1.75 KW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Right rear: WOK burner up to 3.5 KW (depending on gas type)
- Right front: Economy burner up to 1 KW (depending on gas type)

Safety
- Flame failure safety device: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)
- Usable for: Nat gas L/LL G25/20mbar(DE)
- NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 53 x 582 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 492)
- Min. worktop thickness: 30 mm
- Power cord: 1 m
- Connected load: 8 KW

# N 70, GAS HOB, 60 CM, STAINLESS STEEL
# T26DS59N0

