

SU650 Solid State Drive

**FIRST SSD?
GREAT TIMING!**



Ultimate SU650 3D NAND SSD

The Ultimate SU650 solid state drive implements 3D NAND Flash and a high speed controller, offering capacities up to 2TB. It delivers read/write performance up to 520/450MB/s and greater reliability than 2D NAND SSDs. The SU650 features SLC caching and advanced error correction technologies to ensure optimized data performance and integrity. For those who want to experience a clear PC upgrade, the SU650 is an excellent choice with a great cost-performance ratio.

Features

- 3D NAND Flash for higher durability and capacity
- Wide capacity range: 120GB to 2TB
- SLC caching: enhances transmission speed
- Advanced error correction
- Tougher, quieter, and more reliable than HDDs
- Supports ADATA proprietary software – “SSD Toolbox” and “Migration Utility”

Ordering Information

Capacity	Model Number	EAN Code
120GB	ASU650SS-120GT-R	4713218461155
240GB	ASU650SS-240GT-R	4713218461162
256GB	ASU650SS-256GT-R	4711085931511
480GB	ASU650SS-480GT-R	4713218461179
512GB	ASU650SS-512GT-R	4711085931528
960GB	ASU650SS-960GT-R	4713218461186
1TB	ASU650SS-1TT-R	4711085940049
2TB	ASU650SS-2TT-R	4711085945884



Specification

- Capacity: 120GB / 240GB / 256GB / 480GB / 512GB / 960GB / 1TB / 2TB
- NAND Flash: 3D NAND
- Interface: SATA 6Gb/s (SATA III)
- Form factor: 2.5"
- MTBF: 2,000,000 hours
- Sequential read/write (Max.): R/W 520/450MB/s
- Error correction: ECC
- Terabytes Written (TBW)(Max. capacity): 1120TB
- Dimensions (L x W x H): 100.45 x 69.85 x 7mm
- Weight: 47.5g / 1.67oz
- Operating temperature: 0°C-70°C
- Storage temperature: -40°C-85°C
- Shock resistance: 1500G/0.5ms
- Warranty: 3-year limited warranty
- Certifications: CE, FCC, BSMI, KC, EAC, RCM, morocco, UKCA, VCCI


Performance

Capacity	Sequential Performance (Up to) ¹		TBW ²
	Read (MB/s)	Write (MB/s)	
120GB	520	320	70TB
240GB	520	450	140TB
256GB	520	450	140TB
480GB	520	450	280TB
512GB	520	450	280TB
960GB	520	450	560TB
1TB	520	450	560TB
2TB	520	450	1120TB

¹Performance may vary based on SSD capacity, hardware test platform, test software, operating system, and other system variables

²The value is the minimum amount of terabyte written that could be reached.

Schematics

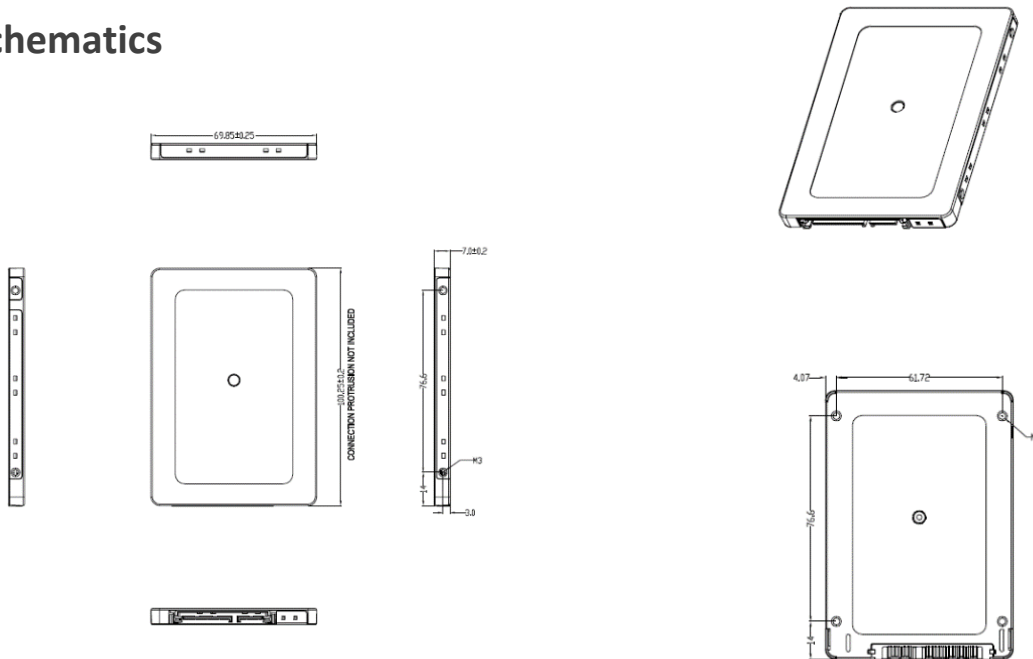

ADATA Technology Co., Ltd
 2F, No.258 Liancheng Rd.,
 Zhonghe Dist., New Taipei City 235, Taiwan
 T: +886-2-8228-0886
 F: +886-2-8228-0887
 E: adata@adata.com

CAN ICES-3 (B)/NMB-3(B)

UK	REP	APEX CE SPECIALISTS LIMITED Address: 89 Fenwick Street, Manchester, M1 4HT, UK E-mail: adata_europe@adata.com
EU	REP	ADATA Technology B.V. Address: Tempelhoop, Sijbrandhof 17-27, 2160 WT, Hoofddorp, The Netherlands E-mail: adata_europe@adata.com

WARNING: Cancer and Reproductive Harm
www.P65Warnings.ca.gov

MSIP-REM-A99-ASU650 RoHS