


# DIGITUS Fiber Optic Multimode Patch Cord, OM 3, SC / SC

DK-2522-01/3  
EAN 4016032248538

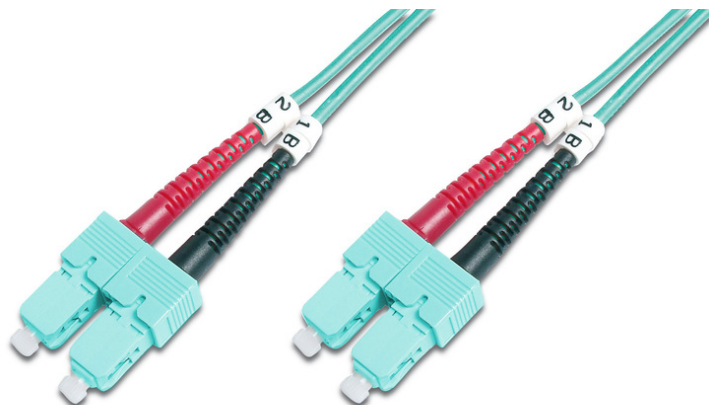

## FO patch cord, duplex, SC to SC MM OM3 50/125 $\mu$ , 1 m

FO patch cord, duplex, SC to SC,MM OM3 50/125  $\mu$ , 1 m

### Future-oriented standards and high-end quality for your network.

- Duplex cable
- LSOH
- Connector with ceramic ferrule
- Cable diameter 2 mm
- Single packed with test-report

### Attributes

- Assortment: Fiber Optic Patch Cables



- Boot: two-color
- Cable diameter: 2 mm
- Cable type: I-VH 2G50/125 $\mu$
- Color cable: aqua
- Connector 1: SC
- Connector 2: SC
- Fiber class: OM3
- Fiber diameter: 50/125 $\mu$
- Mode: Multimode
- Packaging: DIGITUS Polybag
- Length: 1 m


### Logistics

|                              | Number<br>(pcs) | Weight<br>(kg) | Depth<br>(cm) | Width<br>(cm) | Height<br>(cm) | cm <sup>3</sup> |
|------------------------------|-----------------|----------------|---------------|---------------|----------------|-----------------|
| Packaging Unit Carton        | 160             | 8.00           | 41.00         | 41.00         | 29.00          | 48,749.00       |
| Packaging Unit Inside        | 20              | 1.00           | 19.00         | 19.00         | 12.00          | 4,332.00        |
| Packaging Unit Single        | 1               | 0.05           | 17.00         | 17.00         | 1.00           | 289.00          |
| Net single without Packaging | 1               | 0.03           | 15.00         | 15.00         | 1.00           | 0.00            |

### More images:

|                     |                  |      |          |      |
|---------------------|------------------|------|----------|------|
| Part No.            | DK-2522-01/3     |      |          |      |
| Lenght              | 1 m              |      |          |      |
| Cable Type          | Duplex MM 50/125 |      | OM3 LSZH |      |
| Connector Type      | END A            |      | END B    |      |
|                     | SC               |      | SC       |      |
| Insertion Loss (dB) | 0.25             | 0.25 | 0.12     | 0.18 |
| Return Loss (dB)    | 31.5             | 30.2 | 32.7     | 34.7 |
| Q.C.                | PASS             |      |          |      |

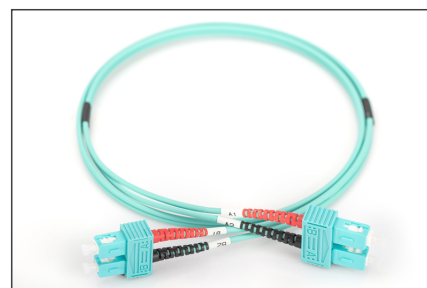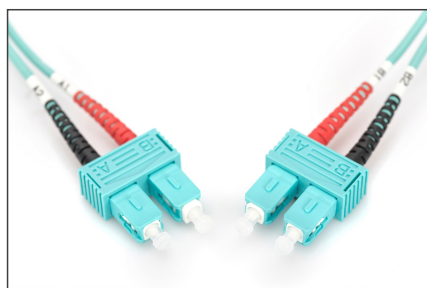

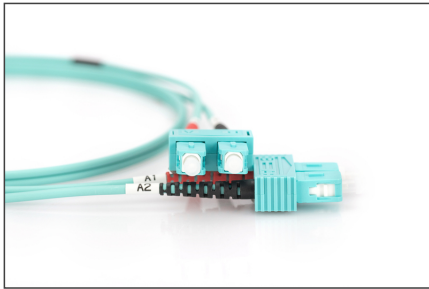**Safety notes**

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage
- eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schöffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)