

AZZA
ONE VISION. ONE MISSION

INFERNO 310



USER MANUAL

www.azzatek.com


AZZA
ONE VISION. ONE MISSION

1. Specifications
2. Chassis Parts
3. Control Panel Functions
4. 3.5"/2.5" HDD Installation
5. Cooling System Installation
6. HURRICANE RGB fan

Specifications


| Model | |
|----------------------------|---|
| Model Name: | INFERNO |
| Model Number: | CSAZ-310 |
| Specs | |
| Type: | ATX Mid-Tower |
| Color: | Black (exterior)/Black (interior) |
| Side Panel Window: | Tempered Glass with Rubber Mounts |
| Max CPU Cooler Height | Up to 155mm |
| With Power Supply: | No |
| Motherboard Compatibility: | ATX, Micro ATX |
| Expansion | |
| External 5.25" Drive Bays: | 1 |
| Internal 2.5" Drive Bays: | 6 |
| Internal 3.5" Drive Bays: | 2 |
| Expansion slots: | 7 |
| Front Ports | |
| | 2xUSB 3.0, HD Audio |
| Cooling System | |
| 120mm Fan: | Front 2x120mm HURRICANE RGB LITE fan, 1x120mm black rear fan |
| Physical Specs | |
| Dimensions(HxWxD) | 480X205X475mm / 18.9X8.1X18.7 inch |
| Weight | G.W.: 8.3kg / G.W.:18.3 lb |
| Features | |
| RGB Light Effects | 2xHURRICANE RGB LITE fans, RGB logo plate, RGB front panel All RGB light effects controlled by external button. |
| Max VGA card length | Supports up to 380mm long video cards |
| Tempered Glass Side Window | High-quality tempered glass with rubber mounted side window allows for clear visuals to inner components. |
| Available Fan Ports | 3x120mm/2x140mm fan ports on the top 2x120mm/2x140mm fan ports in the front (2x120mm RGB LED fans included) 1x120mm fan port in the rear (120mm fan included) |
| Water Cooling | Supports radiator up to 360mm on top/280mm in front |
| Isolated Chamber | Power supply is housed inside its own isolated chamber, preventing its heat from affecting other components. |
| Easy installation Cooler | A pre-cut hole for easy installation of CPU cooler, eliminating the need to remove the motherboard |



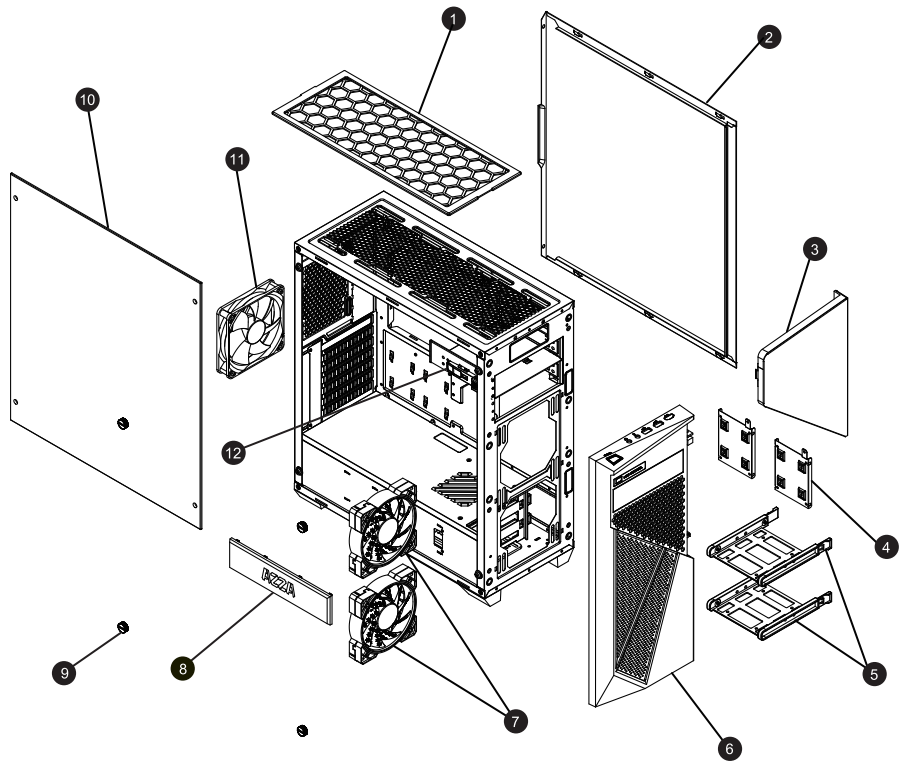


Chassis parts

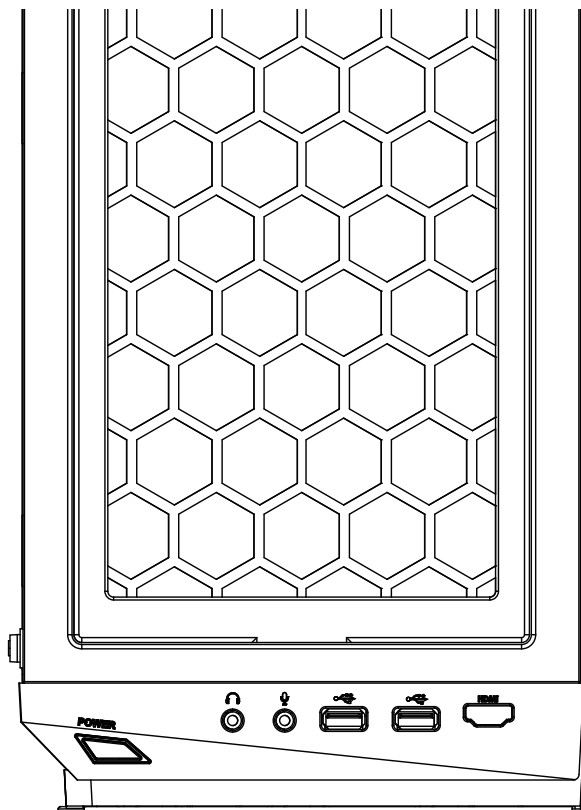


| | |
|----|---------------------------------|
| 1 | Dust filter |
| 2 | Right side panel |
| 3 | Door |
| 4 | SSD brackets |
| 5 | HDD/SSD tray |
| 6 | Front bezel |
| 7 | RGB fan x2 |
| 8 | Logo plate with back RGB lights |
| 9 | Hand screw |
| 10 | Left side panel |
| 11 | 120mm black fan x1 |
| 12 | ODD bay |

Control panel functions



| | | | |
|---|--------------|---|----------|
|  | Power |  | Mic |
|  | USB3.0(Blue) |  | Audio |
|  | USB3.0(Blue) | HDMI | (Option) |



3.5" / 2.5" HDD Installation

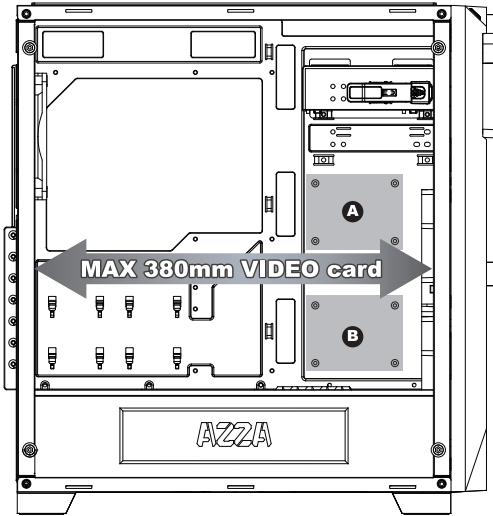


- Supports up to 380mm long video cards.




or

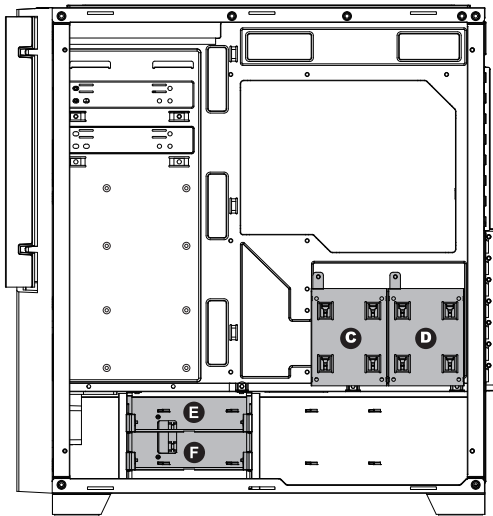


- Two mounting holes support 2.5" devices. (A B)
- Two brackets support 2.5" devices. (C D)
- Two multifunctional trays support 3.5" HDD or 2.5" SSD. (E F)



Multifunctional bracket.




Secure 2.5" SSD / HDD with screws.





Secure 3.5" HDD with screws.


Cooling System Installation

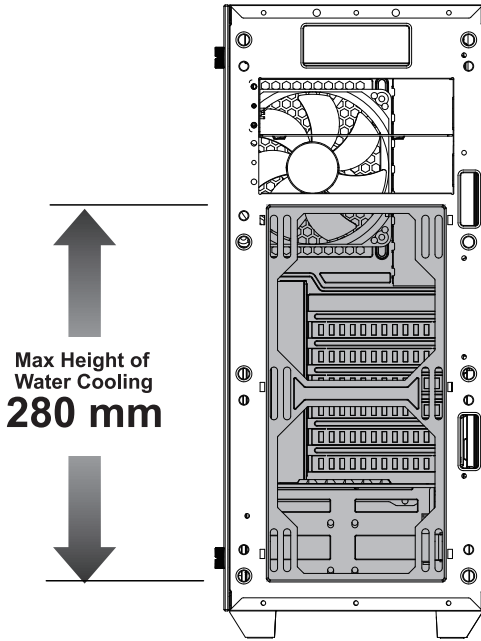

Front

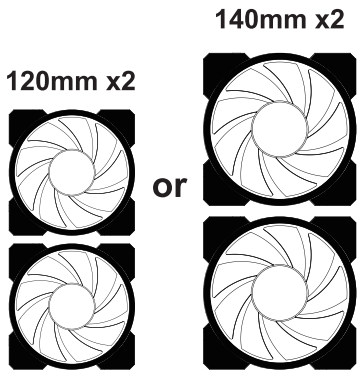

Top

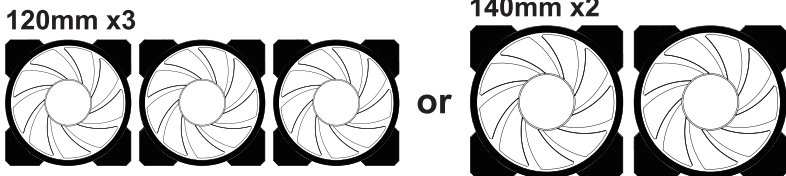

Patented Design

VORTEX AIR (Patented)

To help improve cooling performance, our patented Shark Teeth design helps channel the air into a concentrated stream for more powerful air flow.

SILENCE (Patented)

Special grooves carved into the fan blades help reduce noise levels up to ten percent!

SYNC RGB (Patented)

By plugging the Hurricane RGB fan into a RGB-compatible motherboard, lighting and fan speed can be controlled directly without the need for additional hardware.


CYLINDRICAL LIGHTNING (Patented)

More light is better. With a frame made of acrylic material, the RGB lighting is spread all throughout the fan's frame, giving a clean, uniform look.

| | |
|-------------------|---|
| Model Name | HURRICANE RGB LITE |
| Model Number | FNAZ-12RGB-B-002 |
| | FNAZ-12RGB-W-002 |
| Rated Voltage | 12V |
| Fan Speed | 1500 RPM |
| Max. Air Pressure | 1.26 mm-H ₂ O |
| Max. Air Flow | 47RPM |
| Max. Noise Level | 28.7dB(A) |
| Bearing Type | Sleeve Bearing |
| Life expectation | 60,000 hrs,40°C |
| Connector | 3-PIN |
| | 4-PIN RGB: Male & Female |
| Fan Dimension | 120x120x25mm |
| Color | 7 Color with RF remote 16.8M with LUMI |

HURRICANE RGB fan

- The first RGB fan is to be connected to the RGB LED control board in the chassis, while the rest of them can be daisy chained to the first one with their own male and female plugs.

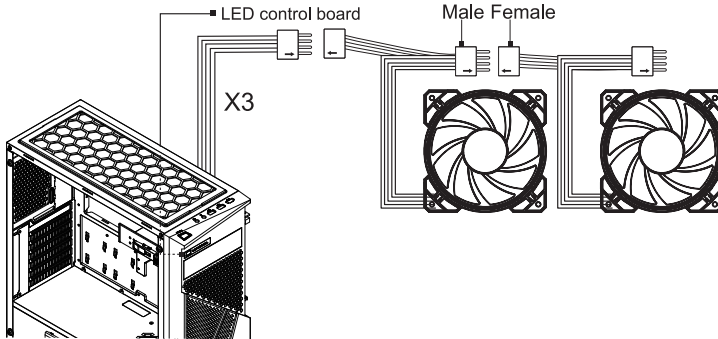

- If you have a RGB-compatible motherboard, then you can connect the Hurricane fan's 4-pin connector directly into your motherboard. You can then adjust fan colors using your native fan control software.

