# Equip Basic Flex 19" Netzwerkschrank, 22HE, 600x600mm, mit Glastür, abnehmbare und verschließbare Paneele, montiert, RAL7035 Grau

# Product Images















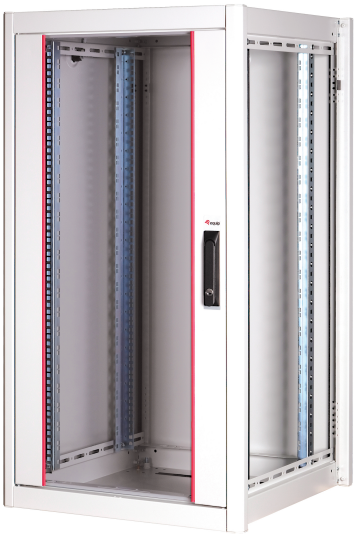

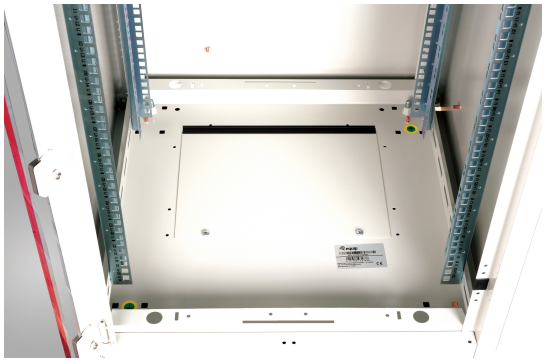

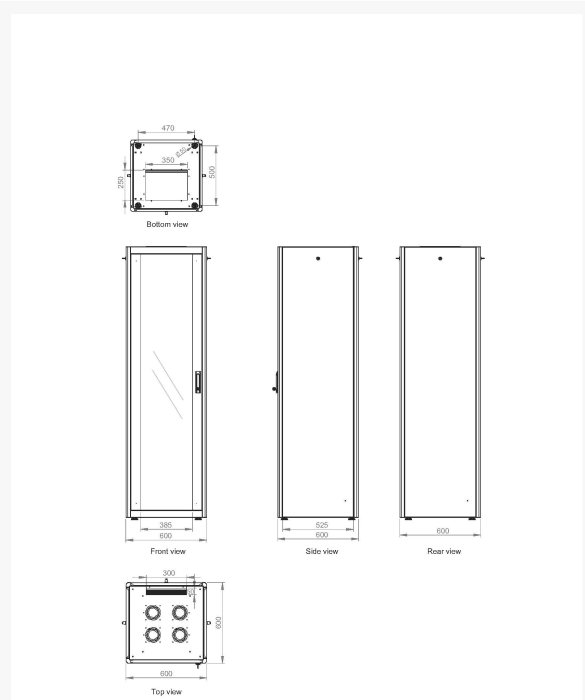


## Short Description

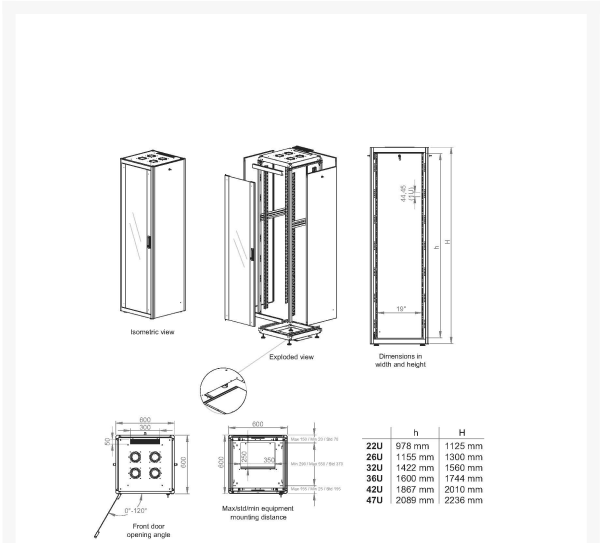- 22U cabinet, designed for optimal performance in every space
- 600X600MM Network Cabinet
- Ships preassembled for easy setup at your location
- The cabinet comes with a tempered glass frontdoor to provide unmatched strength while maintaining clear visibility
- Sidepanels are removable and lockable
- Backpanel is removable and lockable

## Description

These cabinets, of the Basic Flex Line, are engineered for the efficient and user-friendly installation of both active and passive network components, prioritizing streamlined cable management. Crafted from steel sheets up to 1.5 mm thick, every cabinet guarantees excellent stability, attributed to a unique plate curving technique, forming a sturdy steel framework. They are finished with a powder coating in shades of grey (RAL 7035) and black (RAL 9005). For challenging set-up locations that are less accessible, the cabinet is designed to be disassembled. The doors are easily detachable, and their stops can be switched between right and left orientations. Additionally, the roof is prepped for the integration of an air ventilation unit. Inside, each cabinet houses two sets (4 pieces) of 483 mm (19") profile rails. These rails, galvanized and marked with height units readable from both directions, are adjustable in depth. To facilitate extensive equipment installations, they're paired with supplementary depth support bars. Cable management

is central to the design. The cabinet base features a punched-out cable entry shielded with a metal plate. For the broader 800 mm width cabinets, there are added punched-out cable entries covered with plastic on both sides. These entries are replicated on the roof, with a single one for 600 mm width cabinets and three for the 800 mm width ones. To cater to diverse operational needs, a wide assortment of accessories, including cable management tools and shelves, is readily available.

## Additional Information

| | |
|---|---|
| Wandmontage möglich | Nein |
| Anzahl der Kartons pro Palette | 2 piece |
| Bruttogewicht der Palette | 6800 gram |
| Bruttovolumen der Paletten | 69360 cubic_centimeter |
| Volumen der Verpackung | 29246800 cubic_centimeter |
| Maximale Anzahl von Stapelkartons | 2 piece |
| Länge der Palette | 680 millimeter |
| Breite der Palette | 680 millimeter |
| Höhe der Palette | 150 millimeter |
| Handbuch | Ja |
| Montagesatz | Nein |
| Maximale Gewichtskapazität | 600 kilogram |
| Schlüsselsperrung | Ja |
| Material des Gehäuses | Steel |
| Eingebaute USV | Nein |
| Rack-Schienen | Ja |
| Typ des Rahmens | Closed |
| Einstellung der Füße | 30 millimeter |
| Montage erforderlich | Nein |
| Schalldicht | Nein |
| Lenkrollen | Nein |
| Schrank Typ | Freestanding rack |
| Höheneinheit | 22U |
| Abnehmbare Hintertür | Ja |
| Abnehmbare Vordertür | Ja |
| Maximale Gewichtskapazität auf Rollen | 600 kilogram |

| | |
|---|---|
| Konstruktion der Hintertür | Steel |
| Konstruktion der Vordertür | Tempered glass |
| Konstruktion der Seitenwände | Steel |
| Schloss für die Seitenwände | Ja |
| Schloss für die Hintertür | Ja |
| Schloss für die Vordertür | Ja |
| Inklusive Seitenteile | Ja |
| Dicke der Rack-Schiene | 1.5 millimeter |
| Stabilisierungsfußschraube | Ja |
| Anzahl der Stabilisierungsfußschrauben | 4 piece |
| Verstellbarer Ständer | Nein |
| Überwachung | Nein |
| Haupt-PDU | Nein |
| Produktdesign | 4-Post |
| Art der Kühlung | Passive |
| Öffnungswinkel der Tür | 120 degree |
| Abnehmbare Seitenteile | Ja |
| Anzahl der Lagen pro Palette | 2 piece |
| Bruttogewicht der Palette | 54800 gram |
| Code des Harmonisierten Systems (HS) | 853710 |
| Zolltariflicher Warencode (TARIC) | 8537109899 |
| Kohlenstoff-Fußabdruck | 7.7634 kilogram |
| Menge pro Palette | 1 piece |
| Einhaltung der Nachhaltigkeit | Ja |
| Schrauben inklusive | Nein |
| Wandmontagesatz | Nein |
| Temperatursensor | Nein |

| | |
|---|---|
| Sockelplatte | Nein |
| Muttern inklusive | Nein |
| Erdungsset | Ja |
| Menge pro Packung | 1 piece |
| Tiefe des Pakets | 680 millimeter |
| Höhe des Pakets | 1265 millimeter |
| Breite des Pakets | 680 millimeter |
| Kurzanleitung zur Installation | Nein |
| Gewicht der Verpackung | 2600 gram |
| Einstellbare Füße | Ja |
| Einstellbare Tiefe | Nein |
| Kabelmanagement | Nein |
| Vormontiert | Ja |
| Inhalt des Pakets | Erdungssatz |
| Farbe | Light Grey |
| RAL Code | RAL7035 |
| Modellnummer | EBF-22-6060-G-BAAA |
| Rail to Rail Länge | 19 inch |
| Produkt Höhe | 1125 millimeter |
| Produkt Breite | 600 millimeter |
| Produkt Tiefe | 600 millimeter |
| Dicke des Materials | 96.5 millimeter |
| Innere Höhe | 978 millimeter |
| Innere Breite | 595 millimeter |
| Unterstützte Mindestracktiefe | 290 millimeter |
| Maximal unterstützte Rack-Tiefe | 550 millimeter |
| Innere Tiefe | 595 millimeter |

| | |
|---|---|
| Produkt Gewicht | 45400 gram |