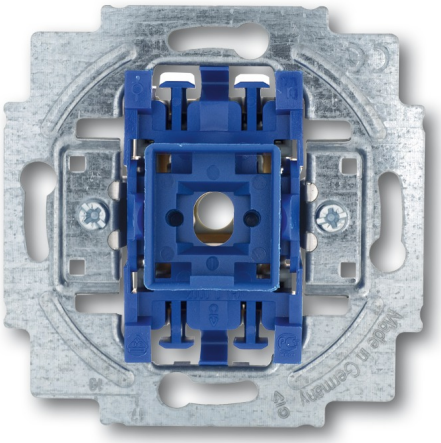


Inserts for flush-mounted switch ranges
Push-switch mechanism
SP, with normally open contact (operating current)

With 2 independent signalling contacts.

Rated voltage: 250 V~,
Inputs: 1
Outputs: 1, Rated current: 10 A
Only in conjunction with standard flush-mounting boxes according to DIN 49073, Part 1, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete),

Order Code : 2CKA001413A0483
Article No. : 2020 US-201
EAN: 4011395045602