PROJECTOR
LS951WU


Key **Features**

- 8,000 ANSI Lumens ensure vibrant images in large venues
- High native contrast ratio provided by a 0.67" DMD chip and DLP technology
- 0.75-0.95 short throw for seamless edge-blending without shadows
- Installation flexibility: motorized focus, 1.26x optical zoom, H/V lens shift, and 360° projection
- Centralized LAN control for efficient management



Product **Description**

Introducing the LS951WU from ViewSonic's Luminous Superior Series, tailored for expansive venue displays. Featuring a robust 8,000 ANSI Lumens brightness and a high native contrast provided by a 0.67" DMD chip through DLP technology, it delivers stunning visuals on screens up to 300 inches. With a 0.75-0.95 short throw, the LS951WU delivers a seamless image on a 100-inch screen from only 1.6 meters away without shadows, enabling effortless edge blending to create immersive experiences. Motorized focus, zoom, lens shift, and H/V keystone adjustment make setup a breeze, while portrait mode and 360° projection capabilities cater to more advanced requirements. Comprehensive LAN control ensures seamless integration into existing device management networks. Employing advanced 2nd generation laser phosphor technology, the LS951WU boasts a remarkable 30,000-hour lifespan, reducing maintenance costs for both business and educational institutions.

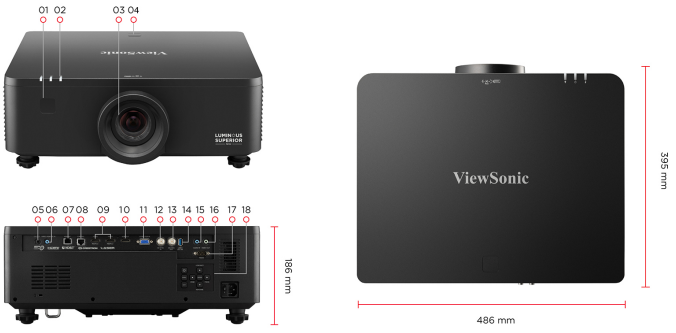

1. Front IR
2. LED Indicator
3. Lens
4. Top IR
5. 12V Trigger
6. IR In
7. HDBaseT
8. RJ-45
9. HDMI 2.0/ HDCP 2.2 x2
10. HDMI Out
11. Computer In
12. 3D Sync In
13. 3D Sync Out
14. USB-A (5V/1.5A)
15. Audio In
16. Audio Out
17. RS232
18. Keypad

Visit Us www.viewsonic.com

SPECIFICATION

Projection System:	0.67" WUXGA
Native Resolution:	1920x1200
Brightness:	8000 (ANSI Lumens)
Brightness (Center Lumens):	8100
Contrast Ratio:	3000000:1
Display Color:	1.07 Billion Colors
Light Source Type:	Laser Phosphor
Light Source Life (hours) with Normal Mode:	20000
Light Source Life (hours) with SuperEco Mode:	30000
Lens:	F=2.3-2.53, f=11.11-14.06mm
Projection Offset:	0%±10%
Throw Ratio:	0.75-0.95
Optical Zoom:	1.26X
Digital Zoom:	0.5x-4.0x
Image Size:	50"- 300"
Throw Distance:	0.81-6.13m (100"@1.61m)
Keystone:	H:+/-30° , V:+/-15°
Lens Shift V. Range:	+55%, -55%
Lens Shift H. Range:	+25%, -25%
Audible Noise (Normal):	32dB
Audible Noise (Eco):	30dB
Input Lag:	19ms
Resolution Support:	VGA(640 x 480) to 4K(3840 x 2160)
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p, 2160p
Horizontal Frequency:	15K- 135KHz
Vertical Scan Rate:	23- 120Hz

INPUT

Computer in (share with component):	1
HDMI:	2 (HDMI 2.0/ HDCP 1.4/2.2)
Audio-in (3.5mm):	1
3D VESA (Sync):	1 (BNC)
HDBaseT:	1
IR In:	1

OUTPUT

HDMI out:	1
Audio-out (3.5mm):	1
Speaker:	10W x2
USB Type A (Power):	1 (5V/1.5A)
12V Trigger (3.5mm):	1
3D SYNC Out:	1

CONTROL

RS232 (DB 9-pin male):	1
RJ45 (LAN control):	1
Wired Remote Control - In:	1 (share with IR in)

OTHERS

Power Supply Voltage:	100-240V+/- 10%, 50/60Hz (AC in)
Power Consumption:	Normal: 560W Standby: <0.5W
Operating Temperature:	5~40°C
Carton:	Brown
Net Weight:	13.0kg
Gross Weight:	17.6kg
Dimensions (WxDxH) with Adjustment Foot:	486X395X186mm
Packing Dimensions:	654x563x373mm
OSD Language:	English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, Vietnamese, Greek, Hungarian, Danish, Norwegian. Total 24 languages
User Guide Language:	English, S-Chinese, T-Chinese, Indonesian, Finish, French, German, Italian, Japanese, Korean, Polish, Portuguese, Russian, Spanish, Swedish, Turkish, Arabic, Czech, Thai, Vietnamese, total 20 languages

STANDARD ACCESSORY

Power Cord:	1
Remote Control:	1 (w/ backlit)
QSG:	Yes
Warranty Card:	Yes (CN Only)

Copyright © ViewSonic Corporation 2000-2025. All rights reserved.